

SMPTE Meeting Presentation

Gamut Mapping for Digital Cinema

Jan Fröhlich

University of Tübingen, Sand 14, 72076 Tübingen, Germany, froehlichj@hdm-stuttgart.de
Stuttgart Media University, Nobelstraße 10, 70569 Stuttgart, Germany

Andreas Schilling

University of Tübingen, Sand 14, 72076 Tübingen, Germany, schilling@uni-tuebingen.de

Bernd Eberhardt

Stuttgart Media University, Nobelstraße 10, 70569 Stuttgart, Germany,
eberhardt@hdm-stuttgart.de

**Written for presentation at the
SMPTE 2013 Annual Technical Conference & Exhibition**

Abstract. *To ensure consistent presentation of wide gamut Digital Cinema Packages (DCPs) on standard gamut screens, a mandatory gamut mapping strategy has to be chosen. In this paper, current gamut mapping algorithms are evaluated with respect to their application in digital cinema. These algorithms include: "Simple Clip", "Cusp Clip", "Minimum delta E" (MindE), "Hue preserving MindE", "Weighted MindE" and the mapping strategy which is used in current projectors. The investigated gamut mapping algorithms will be provided as 3D lookup tables for comparison. These can also be used to retrofit a more advanced gamut mapping strategy to standard gamut projectors. Therefore, the paper closes with an analysis of the losses introduced by using 3D lookup tables for gamut mapping. The intent of this paper is to initiate a discussion about gamut mapping strategies for digital cinema, which may ultimately lead to an addendum to the SMPTE standards for digital cinema.*

Keywords. gamut mapping; digital cinema; digital projection

The authors are solely responsible for the content of this technical presentation. The technical presentation does not necessarily reflect the official position of the Society of Motion Picture and Television Engineers (SMPTE), and its printing and distribution does not constitute an endorsement of views which may be expressed. This technical presentation is subject to a formal peer-review process by the SMPTE Board of Editors, upon completion of the conference. Citation of this work should state that it is a SMPTE meeting paper. EXAMPLE: Author's Last Name, Initials. 2011. Title of Presentation, Meeting name and location.: SMPTE. For information about securing permission to reprint or reproduce a technical presentation, please contact SMPTE at jwelch@smpte.org or 914-761-1100 (3 Barker Ave., White Plains, NY 10601).

Introduction

The rollout of digital cinema is a story of success. Nowadays digital cinemas offer a more precise colorimetry than 35mm projection could offer. This success is based on the decisions of the Digital Cinema Initiatives (DCI) and SMPTE DC-28 to employ non-mainstream image coding technologies like the DCI-X'Y'Z' color space¹.

One of the primary goals of the DCI specification is to build a specification that is not tied to particular mastering- or projection technologies. This is achieved by encoding digital cinema packages (DCPs) in DCI-X'Y'Z' color space, which is independent of today's projection primaries. Figure 1 illustrates the range of colors that can be encoded within the DCI-X'Y'Z' color space (1.1). They surpass the range of colors, visible to the human eye, which is indicated by the horseshoe shaped lines. The volume of colors a projector can display is called the projector's gamut. To guarantee a minimum number of colors that can be reproduced on any digital projection system, the P3 reference gamut (P3ref) (1.2) is defined in SMPTE 431-2². A P3ref projector can only display a subset of the colors encoded in DCI-X'Y'Z', while a prototype laser projector³ (P3laser) (1.3) covers extended colors compared to P3ref but is still not able to show all valid DCI-X'Y'Z' colors.

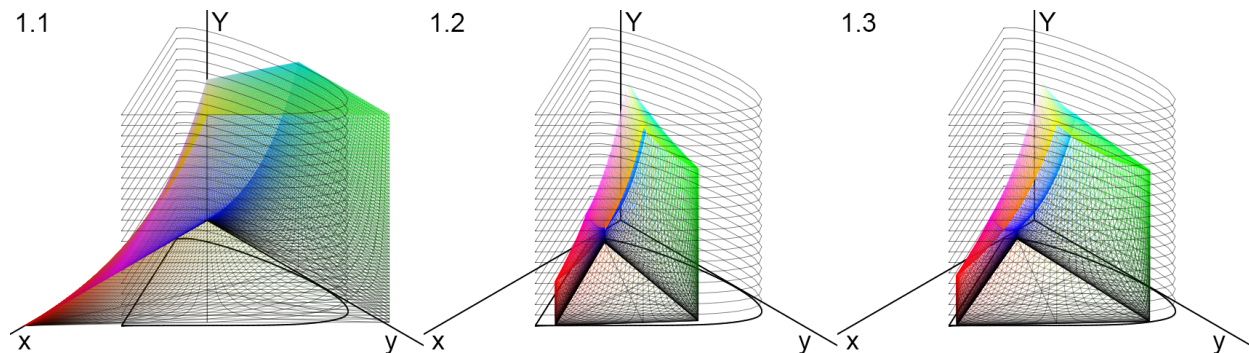


Figure 1. DCI X'Y'Z' color space (1.1) compared to DCI reference projector gamut "P3ref" (1.2) and the gamut of a prototype laser projector "P3laser" (1.3) from the OSIRIS project³. The lower axes x and y are the CIE 1931 chromaticity diagram x- and y-axes, the vertical axis is the Y-component of the CIE 1931 2° standard observer.

Colors, which are outside the gamut boundary and therefore can't be reproduced are called out-of-gamut colors. To be displayed, they need to be mapped to in-gamut colors. This is done by gamut mapping algorithms. These describe the way a particular display maps out-of-gamut colors to in-gamut colors. Gamut mapping can be done in multiple ways. This makes it possible to transfer the same out-of-gamut color to different in-gamut colors. The obtained in-gamut color does not only depend on the gamut mapping algorithm used, but also on the color space in which the mapping is performed.

Current digital cinema standards (SMPTE ST 428 to 431) do not define a mandatory gamut mapping strategy for digital cinema projection. As the results of gamut mapping cannot be foreseen for all digital cinema projectors, a lot of postproduction companies limit the gamut of distribution DCPs to P3ref by using their own gamut mapping strategy. This procedure prevents unexpected results in projection for colors outside of the P3ref gamut. Performing gamut mapping during mastering did not introduce any noticeable issues until the introduction of laser projectors. But when DCPs will be mastered to benefit from the wider gamut of laser projection, it will be inevitable that legacy projectors perform gamut mapping to their native color space. This process should be standardized to ensure a consistent image presentation on all deployed projectors.

The goal of our work is to assist this standardization work by giving an overview of gamut mapping algorithms and mapping spaces that are suitable for digital projection scenarios. We provide an analysis on the characteristics of gamut mapping algorithms and color appearance models used for gamut mapping in respect to the application for digital cinema. In addition, we supply 3D lookup tables (LUTs) to enable the industry to evaluate the different mapping strategies with their individual test images. Finally we inspect how to retrofit legacy projectors to support new gamut mapping strategies.

Methods

Gamut mapping for digital cinema according to the SMPTE digital cinema standards provides clearly defined requirements and conditions. In contrast to gamut mapping from cinematic environment to television presentation, in cinema to cinema gamut mapping, tone mapping is not needed as the defined white stays at 48cd/m^2 and the lightness compression in the blacks, that is needed to adapt to different contrast ratios, is already handled by the relative lightness coding⁴. The viewing conditions, that are relevant when converting to a color appearance model for performing gamut mapping, also stay the same between different projectors, since all cinemas feature a comparable dark surrounding.

Color Spaces for Gamut Mapping

If the goals of gamut mapping are specified in terms of appearance attributes like lightness, chroma and hue, the image has first to be transferred to a color space that is as perceptually linear in these attributes, and as uniform as possible⁵. E.g. if no alteration of hue is desired, there must be a possibility to separate hue from the other appearance attributes.

The most widely used color space that tries to achieve perceptual uniformity is CIE L*a*b* 1976⁶. It serves as basic reference color space for gamut mapping⁷. In print applications, gamut mapping is commonly done in CIECAM02 color space^{8,5}. Unfortunately, CIECAM02 is ill defined for saturated colors near the spectral locus, when used with cooler whitepoints than D50⁹. Therefore a modified CIECAM02 formula according to Li¹⁰ (CIECAM02-HPE) is employed using Hunt-Pointer-Estevéz LMS cone space for adaption, instead of the sharpened CAT02. Another color space intended for gamut mapping is LAB2000HL¹¹. We did not consider LAB2000HL in our survey as the reference implementation also failed to encode colors near the spectral locus. Fritz Ebner's IPT¹² completes the selection of color appearance models included in our survey.

All three color appearance models need a mastering white point as parameter to emulate chromatic adaption. Because DCPs can be mastered with different white points, but the white point is generally not included in the DCP metadata, D60 white point was assumed for all conversion processes.

Selected Gamut Mapping Algorithms

Since DCI-X'Y'Z' colorimetry encodes absolute projected colors, no alteration of in-gamut colors is desired. Color compression inside the gamut boundary would break backward compatibility, as it would change the color reproduction of existent DCPs on deployed projectors. We therefore chose to only include gamut-clipping algorithms into our survey. But it should be noted that gamut mapping algorithms applying gamut compression manage to preserve more spatial details in saturated image areas. Thus, gamut compression algorithms should be reconsidered in case of a major redesign of the digital cinema color encoding system.

To identify the gamut mapping algorithm used by current projectors we analyzed the handling of in-gamut and out-of-gamut colors supplied to a Barco DP90 projector, which was set up to

receive a DCI-X'Y'Z' coded signal at the input. The projected colors were measured using a spectroradiometer. Figure 2 shows the submitted colors (red points) and the measured values (green points) with respect to the projector red and green primary colors as basis. In this representation, the gamut mapping algorithm of the projector becomes apparent. It seems to first convert X'Y'Z' values to it's native color space and then simply clip these values each to the range between off (0) and full intensity (1) of the particular primary color. Note that mapping X'Y'Z'-values to a color space that is spanned by the primary colors of the projector leads to values below 0 and above 1. These values represent physically impossible "negative light" and more intensity from the respective primary color than the projector is able to supply. Thus the values below 0 and above 1 can't be displayed with this set of primary colors. In the following we assume all DLP-Cinema™ projectors perform gamut mapping by clipping into their native color space and call this gamut mapping algorithm PCLIP for "Post-CLIP".

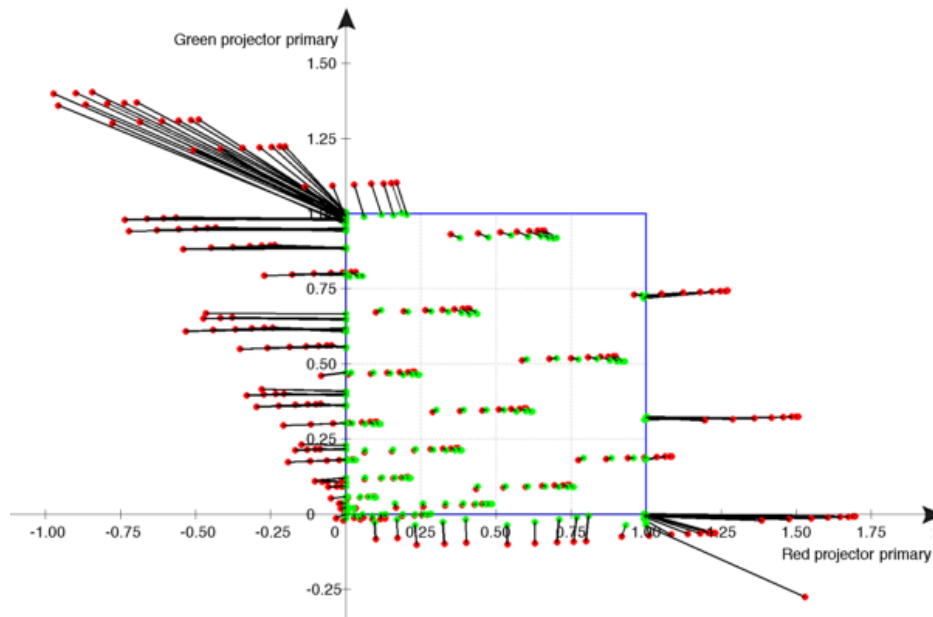


Figure 2. Visualization of the gamut mapping algorithm of a Barco DP90 projector. The x-axis describes the amount of the projectors native red primary color needed to show a particular color. The y-axis shows the same for the projector's green primary. Red dots represent the source colors consisting of all combinations of DCI X'Y'Z' values {0, 512, 1024, 1536, 2048, 2559, 3071, 3583, 4095} that represent real colors. The green dots are the colors measured on screen. To highlight the gamut mapping strategy, all source colors are connected to the resulting colors with a black line.

As PCLIP's truncation of individual color channels results in hue shifts and loss of detail, additional gamut mapping algorithms are investigated. The way they map out-of-gamut colors onto the gamut boundary is illustrated in Figure 3. When available, the notation is inherited from Jan Morovic's book on color gamut mapping⁵:

- 3.1 PCLIP (Post clip) is the gamut mapping algorithm measured from a DLP-Cinema™ projectors. It clips values that the projector can't display in the color space that is spanned by its primary colors.
- 3.2 LCLIP¹³ preserves hue and lightness of out-of-gamut colors but reduces chroma until the gamut boundary is reached.
- 3.3 SCLIP¹³ projects out-of-gamut colors onto the gamut surface, in the direction of one point. Mid gray is a common value for this target point.

- 3.4 CCLIP¹⁴ (Cusp clip) projects all out-of-gamut colors towards points on the gray-axis. The lightness of the respective point is determined by the lightness of the target gamut cusp at the hue-angle of the particular out-of-gamut color. E.g. yellowish colors are projected towards a lighter gray than bluish colors.
- 3.5 MindE¹³ (minimum delta E) selects the in-gamut color with the minimum colorimetric distance for each out-of-gamut color. For the color appearance models used here, colorimetric distance is equivalent to the geometric distance of two points in L, a, and b coordinates.
- 3.6 HPmindE¹⁵ (Hue preserving mindE) works like standard MindE but restricts the search for the nearest in-gamut color to colors with the same hue.
- 3.7 WmindE¹⁶ (Weighted mindE) also belongs to the family of minimum distance algorithms, but uses different weights for Lightness, Chroma and Hue. The parameters used in this paper are 1, 2.6, and 1.3 for lightness, chroma and hue as proposed by Morovic et al. in 2007¹⁷.

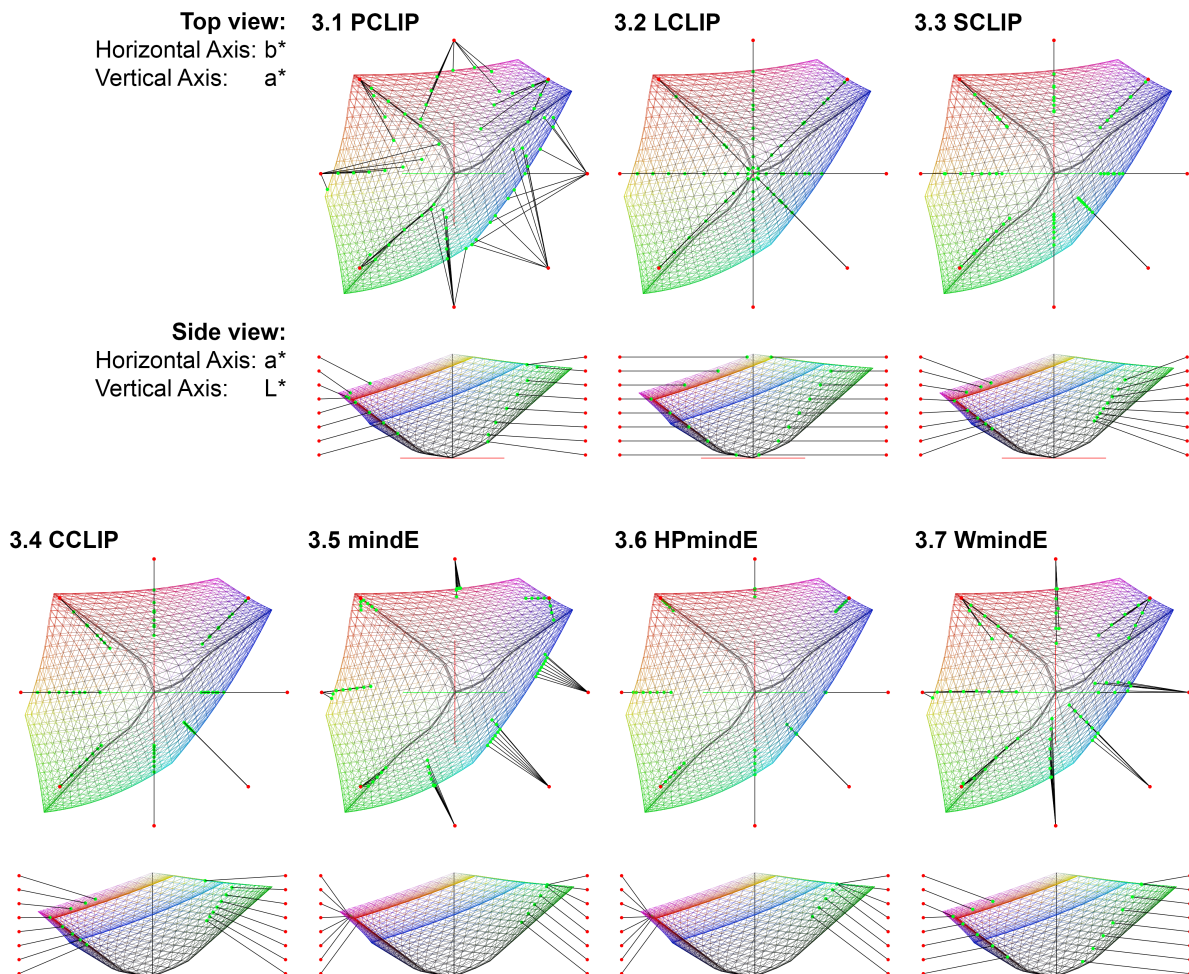


Figure 3. Visualization of the selected gamut mapping algorithms in CIE 1976 $L^*a^*b^*$ color space. The colored grid shows the gamut boundary of P3ref color space. In top view any combination of the L^* values { 3, 16, 30, 43, 57, 70, 84, 97 } with $a^*|b^*$ values of {0|0, 91|91, 0|128, -91|91, -128|0, -90|-90, 0|-128, 90|-90} are mapped to in-gamut colors using the respective gamut mapping algorithm. In the side view row the L^* values are combined with $a^*|b^*$ values of {128|0, -128|0}. These $L^*a^*b^*$ values don't represent real colors but serve to illustrate the different ways the gamut mapping algorithms map colors to P3ref color space.

Results

The presented gamut mapping algorithms were evaluated with the CIE 156⁶ images and custom color graded versions of the Kodim¹⁸ images and MATLAB's built-in pepper image. To be able to see the reference images in wide gamut, a DLP-CinemaTM projector was modified with a special notch filter to feature a gamut that is almost as large as the gamut of prototype laser projectors. The wide gamut reference image was presented together with two representations of this image, each gamut mapped to P3ref with a different gamut mapping algorithm for comparison.

Color Spaces for gamut mapping

The mapping spaces L*a*b*, CIECAM02-HPE and IPT all have major drawbacks when used to predict color appearance in cinematic environments. L*a*b* is not hue-linear enough and thus introduces hue-changes when reducing saturation. To illustrate this, Figure 4.1 shows a perceptually linear desaturation of sRGB's primary blue color as predicted by L*a*b*, CIECAM02-HPE and IPT. When reducing saturation in L*a*b* the medium saturated part of the gradient turns towards purple compared to the most saturated tip. This unwanted effect can be observed in gamut mapping where hue linear desaturation often takes place. CIECAM02-HPE and IPT perform much better in terms of hue linearity but due to the convex shape of primary based color spaces in the blue area, minimum distance based algorithms are prone to introducing artifacts when used with these newer models. The mapping of similar out-of-gamut blues to very different in-gamut colors using mindE can be observed in Figure 4.2. In contrast to CIECAM02-HPE, IPT has proven to be more robust, using our test image set. Figure 4.3 shows the same mindE mapping performed in IPT.

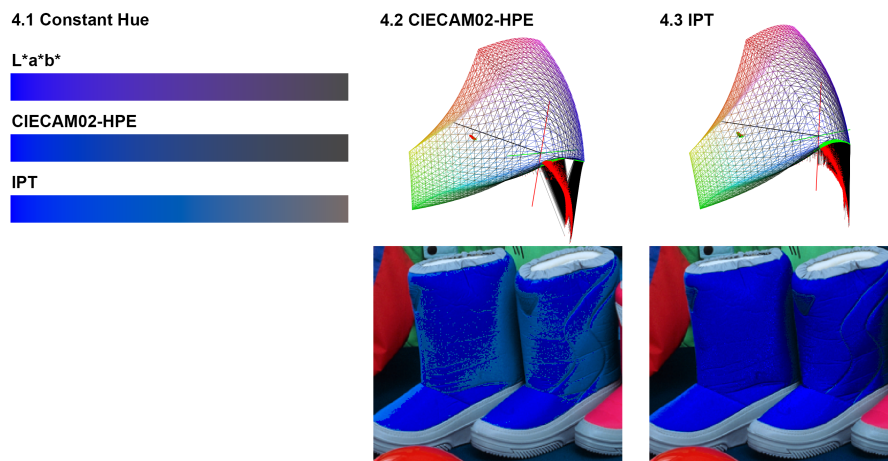


Figure 4. Artifacts introduced by the color space in which the gamut mapping is performed. 4.1 shows bluish colors of different lightness, constant hue and increasing saturation predicted by L*a*b*, CIECAM02-HPE and IPT. In Figure 4.2 a detail from the ISO 165 "Ski" test image⁶ is presented along with the corresponding 3D-rendering of gamut mapping this image via mindE to sRGB¹⁹ color space.

Gamut mapping algorithms

When evaluating gamut mapping algorithms, results can vary a lot depending on the test images⁷. To illustrate the typical characteristics of the selected gamut mapping algorithms, Figure 5 shows MATLAB's pepper image interpreted with laser projection primaries instead of sRGB primaries and then gamut mapped back to sRGB color space. Please note that mapping from P3Laser to sRGB instead of P3ref exaggerates the characteristics of the individual gamut mapping algorithms. Unfortunately no reference image can be shown in this document as the gamut mapped images already use the maximum available gamut of common monitors.

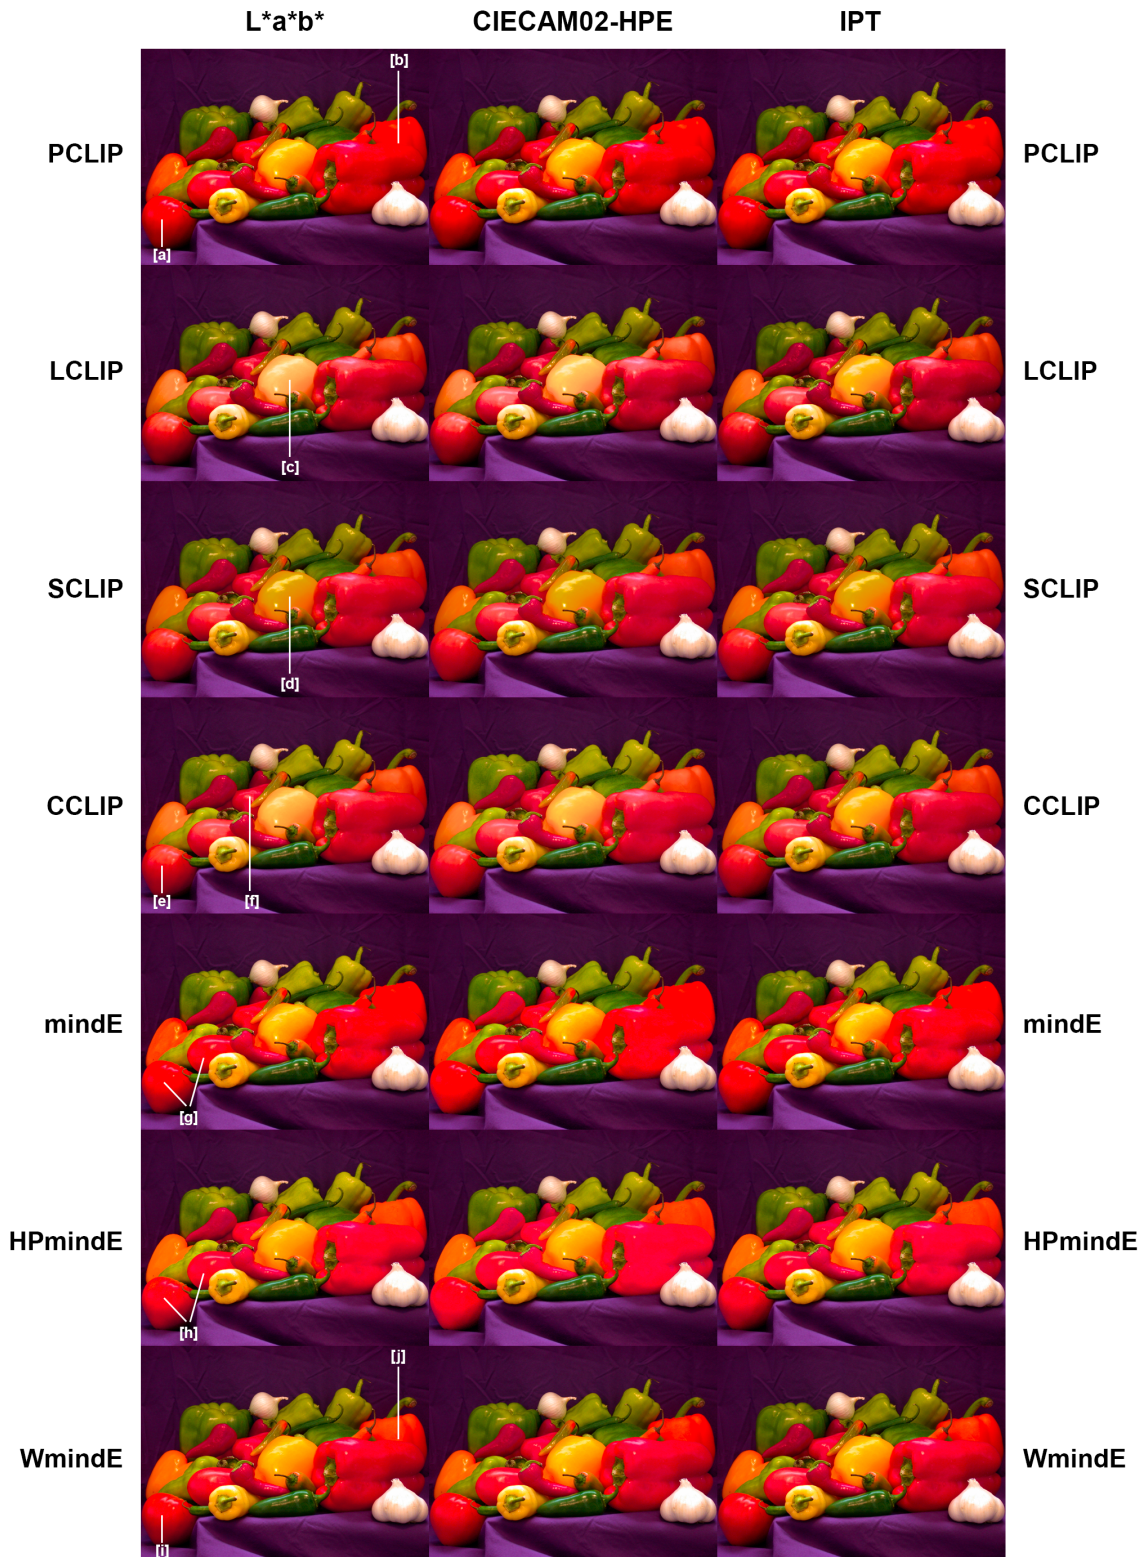


Figure 5. Gamut mapping examples. To be able to be presented on standard monitors, the image was mapped from P3laser to sRGB. Compared to mapping from P3laser to P3ref, this larger step exaggerates the characteristics of the individual gamut mapping algorithms. Please note that due to the additional gamut mapping happening in printing, Figure 5 should only be viewed on sRGB displays. To evaluate the mapping from P3Laser to P3min download the 3D-LUTs from the project website. The peppers image is Copyright The MathWorks, Inc. and is used with permission.

When looking at the first row of Figure 5 it can be observed that PCLIP retains saturation but reduces details, e.g. most of the specular highlight in the left tomato^[a] is lost. Also, if only a single color channel is clipped, hue changes occur. This can be seen in the rear orange pepper on the right^[b]. All three PCLIP images are identical because PCLIP uses the target color space as gamut mapping space instead of a color appearance model. In contrast to PCLIP, the LCLIP algorithm preserves hue and lightness but chroma can change drastically. This appears in saturated out-of-gamut colors like the yellow pepper in the middle^[c], mainly in the L*a*b* and IPT columns. This yellow color could be transferred to in-gamut with a minimal change in lightness but it is instead desaturated a lot by mapping towards white. While LCLIP renders bright saturated colors even brighter, the SCLIP algorithm results in the darkening of bright colors. Again note the yellow pepper in the middle^[d]. As a compromise CCLIP prevents the darkened highlights of SCLIP but like SCLIP and LCLIP preserves details at the cost of lost saturation. The tomato on the left^[e] and the red pepper hidden behind the yellow pepper in the middle of the image^[f], serve as good examples.

While approaches seeking the minimum distance like the mindE algorithm seem to be the best solution if the mapping space is perceptually linear, they introduce severe problems. If the gamut boundary of the target gamut is concave, out-of-gamut colors that are very close to each other may be projected to much more distant in-gamut colors, as illustrated in Figure 4.2. Lost details^{[g],[h]} near the peaks of the digital projection gamut are another disadvantage that all algorithms searching for minimum distance suffer from. This is less an issue in print applications, where the target gamuts are generally rounder than the pointed digital projection gamuts. MindE and HPmindE are particularly affected from this problem. For an illustration of this problem see the projection of the different synthetic red tones to one color in Figure 3.5. In contrast to mindE and HPmindE, WmindE preserves more details but still retains a lot of saturation. Again see the tomato on the left^[i] and the two peppers on the right^[j].

In summary, using the test images described above, it can be observed that WmindE performs best for digital projection. It offers a compromise between the preservation of saturation of the PCLIP algorithm and the retained hue and details from L-, S-, and CCLIP gamut mapping algorithms.

Implementing gamut mapping by means of 3D lookup tables

In the following section we analyze the artifacts introduced by using 3D LUTs for implementing gamut mapping into existing digital cinema projectors. 3D LUTs can be inserted in the processing path of DLP-Cinema™ projectors²⁰. Series 1 projectors offer a 3D LUT precision of up to 49x49x49 lattice points but series 2 projectors are limited to a precision of 17x17x17²¹. The top row of Figure 6 shows a gradient test image that is gamut mapped from P3laser to P3ref using WmindE. In comparison, the same gradient is shown gamut mapped via a 3D LUT in the second row. Note the waves in the upper red part of the gradient in the image mapped by the 17x17x17 3D LUT. In the bottom row, the differences between the two images are shown in CIE1976 delta E. As can be seen in the second column, increasing the 3D LUT precision to 49 steps helps but does not prevent small, just noticeable differences in synthetic images, especially at the boundary of the P3ref gamut.

As a conclusion, the 3D LUT size found in DLP-Cinema™ Series 2 projectors is not sufficient to support visually lossless gamut mapping. Only series 1 projectors can be retrofitted to support advanced gamut mapping via a simple X'Y'Z' to X'Y'Z' 3D LUT. In our real-world test images, no differences were perceived between direct gamut mapping and gamut mapping via a 49 step 3D LUT. By using methods for improving 3D LUT precision for gamut mapping²² the performance of this 3D-LUT might be further enhanced.

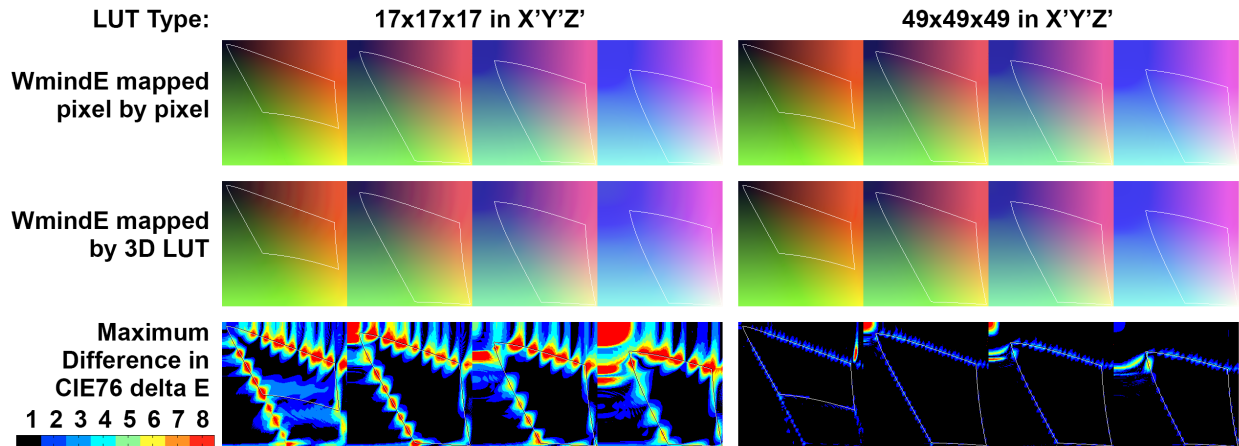


Figure 6. Four gradients in P3laser color space, each gamut mapped to P3ref. The first row is mapped directly, the second row via 3D LUT and the third row illustrates the differences between the correct mapping and the implementation by 3D LUT. The P3ref gamut boundary is indicated by a white line. In the first two rows, the gradients are converted back to P3laser color space and are then interpreted as sRGB to be able to be shown in this paper.

Conclusion

With the introduction of laser projectors, DCPs will be mastered for wider gamuts. As different gamut mapping algorithms generate divergent results, gamut mapping for digital cinema needs to be standardized to ensure a predictable presentation on all screens.

The PCLIP algorithm, presumably used in current projectors, tends to result in hue-shifts and loss of detail. But it can easily be implemented without using a 3D LUT. Among the evaluated gamut mapping algorithms, WmindE in IPT is a promising candidate. It can preserve more details and hue than PCLIP without introducing artifacts in the evaluated image set.

DLP Cinema™ Series 1 projectors can currently be retrofitted with a new gamut mapping algorithm using a 3D LUT. Series 2 projectors would need hardware modifications to support 3D LUT processing with a sufficient precision.

We invite the industry to evaluate the presented gamut mapping algorithms with a large variety of images. To facilitate this, all gamut mapping algorithms presented in this paper are available for download as 3D-LUTs at <http://www.hdm-stuttgart.de/~froehlichj>. When consensus is reached which algorithm performs best, this gamut mapping strategy should be added to the digital cinema projection standards.

Acknowledgements

We would like to thank CinePostproduction GmbH Bavaria Bild & Ton, Munich, Germany and Christie Digital, Germany for being able to use their projectors and measuring equipment. We are particularly grateful for the help given by Stefan Reinhard to conduct the final evaluation of gamut mapping algorithms and we would like to thank Sebastian Herholz for proofreading.

This work was partly supported by “Kooperatives Promotionskolleg Digital Media” at Stuttgart Media University, University of Tübingen and the University of Stuttgart.

References

- ¹ SMPTE 428-1, "D-Cinema Distribution Master - Image Characteristics," *SMPTE Technology Committee DC28 on D-Cinema*, 2006.
- ² SMPTE 431-2, "D-Cinema Quality - Reference Projector and Environment for the Display of DCDM in Review Rooms and Theaters," *SMPTE Technology Committee DC28 on D-Cinema*, 2012.
- ³ P. Janssens, and K. Malfait, "Future prospects of high-end laser projectors," SPIE OPTO: Integrated Optoelectronic Devices. International Society for Optics and Photonics, pp. 72320Y-72320Y-12, 2009.
- ⁴ T. O. Maier, "Color Processing for Digital Cinema 2: Explanation of the Constants 4095 and 52.37, the White Points, and the Black," *SMPTE Motion Imaging Journal*, 116 no. 10, pp. 447-455, 2007.
- ⁵ J. Morovič, *Color Gamut Mapping*, Wiley: Chichester, 6.1 pp. 112-114, 9 pp. 171-191, 2008.
- ⁶ ISO 11664-4:2011, "Colorimetry - Part 4: CIE 1976 L*a*b* Colour space," *International Organization for Standardization*, Geneva, Switzerland, 2011.
- ⁷ CIE 156:2004, "Guidelines for the evaluation of Gamut Mapping Algorithms," *International Commission on Illumination*, Vienna, 2004.
- ⁸ N. Moroney, et al., "The CIECAM02 color appearance model," *Proc. of IS&T and SID's 10th Color Imaging Conference: Color Science and Engineering Systems, Technologies, and Application*, pp. 23-27, 2002.
- ⁹ M. H. Brill, and M. Marc, "Visualization of mathematical inconsistencies in CIECAM02," *Color Research & Application*, 2012.
- ¹⁰ C. Li, and M. R. Luo, "A New version of CIECAM02 with the HPE primaries," *Proc of IS&T's 6th European Conference on Colour in Graphics, Imaging, and Vision*, pp. 151-154, 2012
- ¹¹ I. Lissner, and P. Urban, "How perceptually uniform can a hue linear color space be?," *Proc. of IS&T and SID's 18th Color Imaging Conference: Color Science and Engineering Systems, Technologies, and Application*, pp. 97-102, 2010.
- ¹² F. Ebner, and M. Fairchild, "Development and Testing of a Color Space (IPT) with Improved Hue Uniformity," *Proc. of IS&T and SID's 6th Color Imaging Conference: Color Science, Systems and Applications*, pp. 8-13, 1998.
- ¹³ J. J. Sara, "The automated reproduction of pictures with nonreproducible colors," Ph.D. dissertation, Dept. of Electrical Engineering and Computer Science, Massachusetts Institute of Technology, 1984.
- ¹⁴ L. MacDonald, and J. Morovic, "Assessing the effects of gamut compression in the reproduction of fine art paintings," *Proc. of IS&T and SID's 3rd Color Imaging Conference: Color Science, Systems and Applications*, pp. 194-200, 1995.
- ¹⁵ J. M. Taylor, G. M. Murch, and P. McManus, "Tektronix HVC: A Uniform Perceptual Color System for Display Users," *SID Digest of Technical Papers*, Baltimore, 1989.
- ¹⁶ N. Katoh, and M. Ito, "Gamut mapping for computer generated images (II)," *Proc. of IS&T and SID's 4th Color Imaging Conference: Color Science, Systems and Applications*, pp. 126-129, 1996.
- ¹⁷ J. Morovic, J. Arnabat, and J. Vilar, "Visually Closest Cross-Gamut Matches Between Surface Colors," *Proc. of IS&T and SID's 15th Color Imaging Conference: Color Science and Engineering Systems, Technologies, and Applications*, pp. 273-277, 2007.

¹⁸ Eastman Kodak Company, Kodak photo CD: photo sampler, distributed by Apple Computer for Eastman Kodak Company, Rochester, N.Y, 1991.

¹⁹ M. Anderson, et al., "Proposal for a Standard Color Space for the Internet – sRGB," *Microsoft and Hewlett-Packard Joint Report*, 1996.

²⁰ G. Pettitt, and B. Walker, „DLP Cinema Technology: Color Management and Signal Processing," *Proc. of IS&T and SID's 9th Color Imaging Conference: Color Science and Engineering Systems, Technologies, and Application*, pp. 348-354, 2001.

²¹ Barco nv Entertainment Division, "R5905064 - User Guide - Communicator Post Production," pp. 342, 30.07.2012

²² M. Bhachech, M. Shaw, and J. DiCarlo. "Improved color table inversion near the gamut boundary," *Proc. of IS&T and SID's 14th Color Imaging Conference: Color Science and Engineering Systems, Technologies, and Application*, pp. 44-49, 2006.