

AMERICAN STANDARD
200-Mil Magnetic Sound Record
on 16mm Film Base Perforated One Edge

ASA
 Reg. U.S. Pat. Office
PH22.97-1956
 *UDC 778.571.531.351.2

1. Scope


- 1.1 This standard specifies the location, dimensions and recording speed of a 200-mil magnetic sound record on 16mm motion-picture film base with perforations along one edge.
- 1.2 The film is normally used for sound without picture.
- 1.3 The dimensions of the magnetic coating is not specified here but is assumed to be wide enough to permit the placement of a sound record in accordance with this standard.

2. Sound Record

- 2.1 The location and dimensions of the sound record shall be as given in the diagram and table.
- 2.2 The recording speed shall be 24 perforations per second (approximately 36 ft per minute).
- 2.3 With the direction of travel as shown in the diagram, the magnetic coating is on the upper side of the film base or in other words toward the lamp on a projector arranged for direct projection.

3. Film Base

- 3.1 The film base used shall be of the low-shrinkage safety type, cut and perforated in accordance with American Standard PH22.12-1953, Dimensions for 16mm Film, Perforated One Edge.

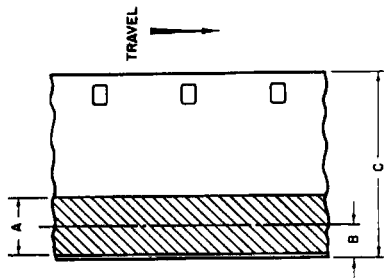

Dimension	Inches	Millimeters
A	0.200 ± 0.002	5.08 ± 0.05
B	0.103 ± 0.002	2.62 ± 0.05
C	0.630 nom	16 nom.

Approved April 24, 1956, by the American Standards Association, Incorporated
 Sponsor: Society of Motion Picture and Television Engineers
 Copyright 1956 by the American Standards Association, Incorporated
 19 East Forty-fifth Street, New York 17, N.Y.
 Printed in U.S.A.
 ASA 943659

Price, 25 Cents

AMERICAN STANDARD
Magnetic Coating of
16mm Film Perforated Along Both Edges

ASA
 Reg. U.S. Pat. Office
PH22.101-1956
 *UDC 778.571.531.351.2


1. Scope

- 1.1 This standard specifies the location and dimensions of the magnetic coating material applied to 16mm motion-picture film with perforations along both edges to be used for both picture and sound.

2. Magnetic Coating

- 2.1 The location and dimensions of the magnetic coating shall be as given in the diagram and table.
- 2.2 The magnetic coating is on the side of the film toward the lamp of a projector arranged for direct projection on a reflection type screen.
- 2.3 The No. 1 magnetic stripe is intended for the sound record.

NOTE: The No. 2 stripe is an optional balance stripe and may be a magnetic coating or another material of the same thickness.

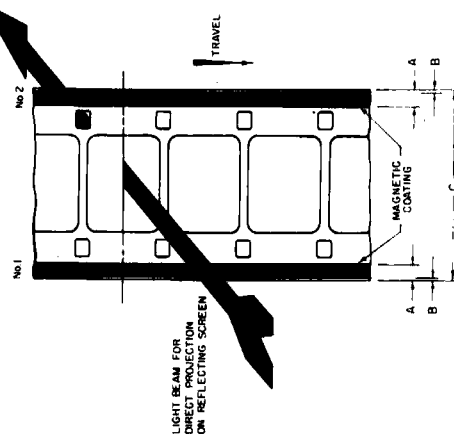

Dimension	Inches	Millimeters
A	0.031 max 0.028 min	0.79 max 0.71 min
B	0.002 max	0.05 max
C	0.628 nom	16 nom

Approved April 24, 1956, by the American Standards Association, Incorporated
 Sponsor: Society of Motion Picture and Television Engineers
 Copyright 1956 by the American Standards Association, Incorporated
 19 East Forty-fifth Street, New York 17, N.Y.
 Printed in U.S.A.
 ASA 943658

Price, 25 Cents