

# standards and recommended practices

## Proposed American Standards and SMPTE Recommended Practice

Published here for a three-month period of trial and criticism are three proposed American Standards and one proposed SMPTE Recommended Practice. All comments should be addressed to J. Howard Schumacher, *SMPTE Staff Engineer*, prior to July 29, 1960. If no adverse comments are received, the

Recommended Practice will be submitted to the Society's Board of Governors for approval; and in the case of the three proposed American Standards they will be submitted to the American Standards Association Committee PH22 for further processing as American Standards.—*J.H.S.*

<p>Proposed American Standard</p> <p><b>Speed for 2-In. Video Magnetic Tape</b></p>	<p>PH22.122</p>
---	-----------------

### 1. Scope

This standard specifies the rate of travel of 2-in. wide video magnetic tape in video-tape recorders.

### 2. Rate of Tape Travel

The average rate of travel of the tape in a video-tape recorder is  $16(n)$  video tracks per second, where  $n$  is the vertical synchronizing pulse repetition rate. This is a nominal rate of 960 video tracks per second, for recordings

made in accordance with Proposed American Standard Dimensions for Video, Audio and Control Recorder on 2-In. Video Magnetic Tape, PH22.120. This is equivalent to a nominal linear speed of 15 in. per second.

*Note:* The vertical synchronizing pulse repetition rate,  $n$ , is nominally 60 pulses per second for monochrome transmissions and 59.94 pulses per second for color transmissions. Departures from these values will result in proportional changes in the rate of tape travel.

NOT APPROVED

<p>Proposed American Standard</p> <p><b>Dimensions for 2-In. Video Magnetic Tape</b></p>	<p>PH22.123</p>
--	-----------------

### 1. Scope

**1.1** This standard specifies the dimensions for the width, thickness, and curvature of 2-in. video magnetic tape.

### 2. Dimensions


**2.1 Width.** The width of the tape shall be  $2.000 \pm 0.002$  in. ( $50.80 \pm 0.10$  mm).

**2.2 Thickness.** The overall thickness of the base plus coating shall not exceed 0.0015 in. (0.038 mm).

### 3. Curvature

**3.1** The curvature of the tape shall not exceed 0.0625 in. (1.59 mm) in 48 in. (1219 mm).

**3.2 Measurement.** Curvature shall be measured by constraining the tape to lie in a plane under zero tension and by positioning a 48-in. long (1219 mm) straightedge as shown in the diagram. The maximum deviation,  $C$ , of the tape edge from the straightedge shall be taken as the curvature.

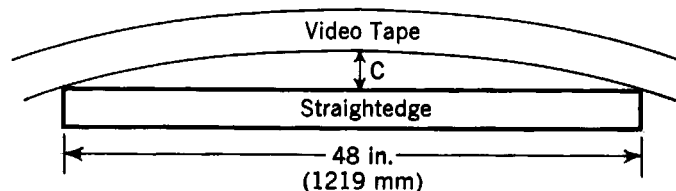

NOT APPROVED

APPENDIX

(This Appendix is not a part of Proposed American Standard Theater Screen Luminance for Indoor Theaters, but is included to facilitate its use.)

of viewing. Under the conditions of the indoor theater with the screen subtending a large angle at the observer's position, with low stray-light levels, etc., these conditions have been found by experiment and experience to represent the best compromise among the many factors involved, but not necessarily the best situation for drive-in theaters and for auditoriums with high ambient light.

**A1. Standard Luminance.** Possible luminance levels are limited by a minimum value below which the visual process becomes less efficient, and by a maximum value above which flicker becomes objectionable. Permissible luminance range is limited by the criterion that a good release print must provide acceptable quality when projected at any luminance within the range.

**A5. Directional Screens.** Matte white screens will show substantially constant luminance at any one specific area on the screen for measurements from any location within the theater. Directional screens in current use have been designed to produce specific reflection patterns which on goniometric measurements of luminance from various viewing angles show wide departures from the properties of a perfectly diffusing surface. By suitable choice of such patterns the attainable luminance may be increased considerably above that possible with a perfectly diffusing screen of the same size when measured near the axis of projection, although there may be a significant variation in luminance with viewing position in the theater.

**A2. Other Variables.** In addition to the luminance distribution, the pictorial quality of projected pictures is influenced by the color of the projection light, the color and characteristics of the screen surface, the presence of stray light, the nature of the surround, and other factors not presently described by standards.

**A3. Preferred Screen Luminance.** This is considered to be that condition wherein (1) the luminance of the center of the screen is constant from every usable seat in the theater and is within the limits of 14-16 ft-L; (2) the luminance of the sides of the screen is approximately 85 percent of the luminance of the center; and (3) the luminance variation has axial symmetry around the center of the screen. The nominal value in 3.1 has been chosen to represent such preferred luminance. The tolerances have been selected to include viewing conditions which experience has shown to be acceptable and to exclude those known to be undesirable. As screen design permits more optimum control of luminance gain, it is expected that tolerances will be reduced and will become more symmetrical.

**A4. Indoor Theaters.** This standard is limited in scope to indoor theaters because it has been observed that optimum screen luminance for projected pictures depends upon the conditions of viewing. Under the conditions of the indoor theater with the screen subtending a large angle at the observer's position, with low stray-light levels, etc., these conditions have been found by experiment and experience to represent the best compromise among the many factors involved, but not necessarily the best situation for drive-in theaters and for auditoriums with high ambient light.

Theater Screen Luminance for Indoor Theaters

1. Scope

- 1.1 This standard specifies the luminance (brightness) of the projection screen for indoor theaters during the projection of 35mm motion-picture film at a rate of 24 frames per second.
- 1.2 This standard specifies screen luminance levels at which the tone scale, contrast and pictorial quality of the projected image from release prints will be of the quality anticipated during their production, and is intended to provide for such quality throughout the audience area.
- 1.3 This standard describes criteria for evaluating the suitability of a screen — whether perfectly diffusing or directional — for a particular theater by establishing a luminance level and maximum luminance variations within the audience area.

a standard observer as specified by the International Commission on Illumination in 1931. The acceptance angle of the photometer shall be as small as is practical, and shall be so used that it accepts light from a screen area no larger than a circle whose diameter is 10 percent of the screen width.

3. Luminance Level

- 3.1 The luminance at the center of the screen shall be 16  $\pm$  4 ft-L (55  $\pm$  14 nits) as measured from a position on the longitudinal centerline of the auditorium and two thirds distance from the screen to the rearmost row of seats.
- 3.2 The luminance at a distance 5 percent of the screen width from the side edges of the screen, and on its horizontal axis, shall be between 65 and 85 percent of the center luminance as prescribed and measured in 3.1 above.
- 3.3 The luminance at any point on the horizontal axis of the screen, between points located at a distance 5 percent of the screen width from the sides of the screen, shall be between 5.5 and 20.0 ft-L (19 and 69 nits) as measured from any seat in the auditorium.

2. Measurement

- 2.1 The measurement of screen luminance is made with the projector in complete operation but with no film in the aperture.
- 2.2 Screen luminance shall be measured with a photometer having the spectral sensitivity of

**A6.** "Luminance gain" is defined as the ratio of the luminance of a specified area of the screen to the luminance of a perfectly diffusing and perfectly reflecting surface, both measured under the same conditions of illumination and observation. For directional screens, luminance gain is a function both of the direction of illumination and of the direction of observation. With any given screen these two vectors may be chosen so that the luminance level obtainable is made a maximum, and this condition defines the "maximum luminance gain."

**A7.** *Limitation on Luminance Range.* Present directional screens show a large variation in gain with changes in the projection and viewing angles, necessitating the 3:1 luminance ranges prescribed in 3.3 when the more desirable screens are fitted into existing theaters. Even this range effectively limits the maximum luminance gain of the screen, and the wider the theater becomes, the lower the maximum luminance gain must be to meet luminance specifications with most existing directional screens. When screen design permits a smaller luminance range, it is intended that this standard be revised accordingly.

**A8.** *Maximum Screen Size.* Projection light output and screen luminance gain together determine the maximum screen size that can be illuminated to produce standard luminance.

**A9.** *Meter Acceptance Angle.* The maximum permissible acceptance angle of the luminance photometer will depend upon the instrument design and method of use, the size of the screen and other factors. The acceptance angle of a suitable instrument must be such that a reduction in this angle (followed by necessary recalibration) does not change the magnitude of any reading specified in 2 by more than  $\pm 5$  percent. The limiting conditions for the reliable use of such meters should be included in the manufacturer's specifications.

**A10.** *Conversion of Units.* Screen luminance in the U.S. is customarily measured in foot-Lamberts, although in international usage the nit is the preferred unit.  $1 \text{ nit} = 0.2919 \text{ ft-L}$ ;  $1 \text{ ft-L} = 3.426 \text{ nits}$ .

**A11.** *Image Luminance.* Note that this standard specifies screen luminance with no film in the projector aperture. When films are projected, the average image luminance will be considerably below this level.

## Proposed SMPTE Recommended Practice RP 7

# Modulation Levels for Monochrome 2-Inch Video Magnetic-Tape Recording

*Introduction.* In current video-tape recording systems the playback video signal level is dependent upon two independent factors, viz., (a) adjustment of the playback video amplifier gain setting and (b) deviation of the recorded, frequency-modulated, radiofrequency carrier signal. In order to achieve uniformity of playback video signal levels without the accompanying need for readjustment of the playback video amplifier gain, it is essential that all video-tape recordings be made in accordance with the same recommended practice for carrier deviation. This is of particular importance for playback on equipment other than that used for recording, or when the playback tape consists of two or more recordings spliced together.

### Recommendations

#### 1. Scope

- 1.1 This recommended practice specifies the recorded modulation levels for monochrome television signals.

#### 2. Recorded Carrier Frequencies

- 2.1 The recorded carrier frequencies corresponding to reference video signal levels shall be as follows:
- Reference White Level:  $6.8 \pm 0.05 \text{ mc}$ .
  - Blanking Level:  $5.0 \pm 0.05 \text{ mc}$ .
  - Sync Tip Level:  $4.28 \pm 0.05 \text{ mc}$ .