

No.	Title	Page, Issue	No.	Title	Page, Issue
PH22.176-1969	Dimensions of Magnetic Striping of 16mm Motion-Picture Film Perf. Super 8, 2R-1667 (1-3)	235, Mar. 1970		*Specifications for Super 8 Azimuth Test Film, Perf. 1R-1667, Magnetic Type	
PH22.182	Dimensions for Photographic Sound Record on Super 8 Motion-Picture Prints (Draft Proposal)	456, May 1970	Miscellaneous		
	*Specifications for 8mm 400-Hz Signal Level Test Film, Perf. Super 8, 1R-1667 Magnetic Type		PH22.172.1-1969	Dimensions of Cemented Splices on 8mm Motion-Picture Film Perf. Super 8, Projection Type.	234, Mar. 1970
	*Specifications for Super 8 Multifrequency Test Film, Perf. 1R-1667 Magnetic Type		PH22.172.2-1969	Dimensions of Tape Splices on 8mm Motion-Picture Film Perf. Super 8 Projection Type	237, Mar. 1970
	*Specifications for Super 8 Flutter Test Film, Perf. 1R-1667, Magnetic Type			*Proposed SMPTE Recommended Practice for Super 8 Sprocket Design	
				*Lubrication of 16 and 8mm Motion-Picture Prints	

* Under SMPTE Engineering Committee review or new work receiving consideration

standards and recommended practices

Approved American National Standards

On June 16, 1971, the American National Standards Institute approved the revision of three American National Standards which are published here for your information.

American National Standard Nomenclature for Motion-Picture Film Used in Studios and Laboratories, PH22.56-1971, lists accepted terms used by laboratories and studios in the preparation of motion-picture films. The preparation of an up-to-date glossary is a difficult and never-ending task; consequently, it must be realized that the standard published here may already be in need of editorial change. Comments addressed to Alex E. Alden, Staff Engineer, at Society Headquarters will be forwarded to the appropriate Committee for consideration in the next issue.

American National Standard Dimensions of Projectable Anamorphic Image Area on 35mm Motion-Picture Film, 2.35:1 Aspect Ratio, PH22.106-1971, has been revised to conform in format with other similar standards. It should be noted that the height of the area has been decreased to lessen flashes on the screen caused by positive splices.

American National Standard Dimensions for Printed Area in Super 8 Printing on 16/8mm Film Perforated 1-4, PH22.153-1971, is a revision of the 1967 issue and should be carefully reviewed by anyone concerned with its use.

Inasmuch as compliance with American National Standards is purely voluntary, these Standards will become truly effective only when broad publicity is given to their existence. ANSI and

SMPTE would appreciate any personal influence to promote the use of these Standards where such action is appropriate. Copies of the Standards may be obtained for a nominal fee from the American National Standards Institute, 1430 Broadway, New York, NY 10018.

Reaffirmation of American National Standards

On August 17, 1971, the American National Standards Institute taking the recommendation of the SMPTE Engineering Committees and the American National Standards Committee PH22, reaffirmed without change the Standards listed below.

The date in parentheses is that of most recent *Journal* publication.

- PH22.76-1960 Threaded Lens Mounts for 16mm and 8mm Motion-Picture Cameras (Feb. 1960)
- PH22.87-1966 Dimensions of 100-Mil Magnetic Striping on 16mm Motion-Picture Film, Perforated One Edge (Aug. 1966)
- PH22.103-1966 Specifications for Projector Usage of 35mm Release Prints with Four-Track Magnetic Sound Records (Mar. 1966)
- PH22.113-1966 Specifications for 16mm 3000-Hertz Flutter Test Film, Magnetic Type (Aug. 1966)
- PH22.147-1966 Dimensions of Motion-Picture Projection Reels for Combination 70/35mm Projectors (Mar. 1966)

ANSI PH22.56-1971
Revision of PH22.56-1961
and PH22.56-1964

American National Standard nomenclature for motion-picture film used in studios and processing laboratories

Approved June 16, 1971

Secretariat: Society of Motion Picture and Television Engineers, Inc.

Page 1 of 14 pages

1. General

1.1 Motion Picture. A series of images presented in rapid succession with objects represented in successive positions either unchanged or changed and producing, because of the persistence of vision, the optical effect of a continuous picture.

1.2 Motion-Picture Film. A thin flexible strip of plastic, complying with a dimensional standard as defined herein, whose use is specific to the process of manufacturing a motion picture.

NOTE: Motion-picture film, perforated or unperforated, is usually described by a name relating to or designating that part of the system for which it was designed, i.e., the terms color negative, release positive, separation master positive, sound recording, electronic video recording, etc.

1.2.1 Raw Stock. Raw stock is film which has not been exposed or processed.

1.2.2 Film Base. Film base is the plastic material upon which a photographic emulsion or other material may be coated.

NOTE: All film base manufactured in the United States for motion-picture use since 1952 has been safety base.

1.2.2.1 Safety Base. Safety base is the slow-burning film support used for motion-picture films which complies with American National Standard Specifications for Motion-Picture Safety Film, PH22.31-1967.

1.3 Magnetic Sound Film. Magnetic sound film is a film base having film perforations along one or both edges and bearing a magnetic coating, either completely across the film or in stripes, the coating being capable of accepting and reproducing sound records.

NOTE: Unperforated materials usually are referred to as magnetic tape.

NOTE: Unperforated materials usually are referred to as magnetic tape.

CAUTION NOTICE: This American National Standard may be revised or withdrawn at any time. The procedures of the American National Standards Institute require that action be taken to reaffirm, revise, or withdraw this standard no later than five (5) years from the date of publication. Purchasers of American National Standards may receive current information on all standards by calling or writing the American National Standards Institute, 1430 Broadway, New York, N.Y. 10018.



Copyright © 1971 by American National Standards Institute 1430 Broadway, New York, N.Y. 10018

NOTE: This perforation and pitch are normally used for films for special effects such as background plates. (See 3.1.4.)

1.4.4 35mm Perforation, KS-1866. The 35mm positive perforation is rectangular in shape with a width of 0.110 in, a height of 0.078 in, a fillet in each corner with a radius of 0.020 in and a pitch of 0.1866 in (American National Standard Dimensions for 35mm Motion-Picture Film, KS-1866, PH22.139-1964, Reaffirmed 1969).

NOTE: This perforation and pitch are used largely for 35mm photographic sound recording purposes and for 65mm camera negative film.

1.4.5 35mm Perforation, KS-1870. The 35mm positive perforation is rectangular in shape with a width of 0.110 in, a height of 0.078 in, a fillet in each corner with a radius of 0.020 in and a pitch of 0.1870 in (American National Standard Dimensions for 35mm Motion-Picture Film, KS-1870, PH22.36-1964, Reaffirmed 1969).

NOTE: This perforation is used widely in 35mm black-and-white release positive film.

1.4.6 35mm Perforation, DH-1870. This perforation is rectangular in shape with a height of 0.073 in, a width of 0.110 in, a fillet in each corner with a radius of 0.013 in and a pitch of 0.1870 in (American National Standard Dimensions for 35mm Motion-Picture Film, DH-1870, PH22.1-1964, Reaffirmed 1969).

NOTE: This perforation is used on 35mm color print film.

1.4.7 35mm Perforation, CS-1870. This perforation is rectangular in shape with a height of 0.073 in, a width of 0.078 in, a fillet in each corner with a radius of 0.013 in and a pitch of 0.1870 in (American National Standard Dimensions for 35mm Motion-Picture Film, CS-1870, PH22.102-1964, Reaffirmed 1969). The outer edge of this perforation is at a different distance from the edge of the film than the other 35mm film perforations listed above.

NOTE: This perforation is used on 35mm release prints having four magnetic sound stripes; one on each side of the perforations.

1.4.8 65mm Motion-Picture Film, KS-1866. The 65mm negative perforation is rectangular in shape with a width of 0.110 in, a height of 0.078 in, a fillet in each corner with a radius of 0.020

in and a pitch of 0.1866 in (American National Standard Dimensions for 65mm Motion-Picture Film, KS-1866, PH22.145-1965, Reaffirmed 1969).

NOTE: The perforation for this film is the same as for 35mm motion-picture film, KS-1866, but the margin and lateral distance between perforations are different.

1.4.9 65mm Motion-Picture Film, KS-1870. This 65mm negative perforation is the same as for 65mm motion-picture film, KS-1866, except for the perforation pitch (American National Standard Dimensions for 65mm Motion-Picture Film, KS-1870, PH22.118-1967).

1.4.10 70mm Motion-Picture Film, Perforated 65mm, KS-1870. The 70mm positive perforation is rectangular in shape with a width of 0.110 in, a height of 0.078 in, a fillet in each corner with a radius of 0.020 in and a pitch of 0.1870 in. This film is intended to be printed from 65mm motion-picture film, KS-1866, or from an optically enlarged 35mm anamorphic negative image. The additional margin width is designed to accommodate magnetic sound tracks (American National Standard Dimensions for 70mm Motion-Picture Film, Perforated 65mm, KS-1870, PH22.119-1967).

NOTE: This 70mm film, perforated 65mm, is used for motion pictures. It should be distinguished from two other types of perforated 70mm film which are used for still pictures. These are described in American National Standard Dimensions for 70mm Unperforated and Perforated Film for Cameras Other Than Motion-Picture Cameras, PH1.20-1970.

1.4.11 16mm Perforation. The 16mm perforation is rectangular in shape with a height of 0.050 in, a width of 0.072 in and a fillet in each corner with a radius of 0.010 in. It is used on the following films:

1.4.11.1 35mm Motion-Picture Film Perforated 32mm, 2R-2994. This is a 35mm film with 16mm perforations so arranged that if 17/2mm are slit from each edge of the film and the film were slit down the middle, two 16mm films would result, each having one row of perforations. The perforation pitch (0.2994 in) is normally used for negative film and some special-purpose films (American National Standard Dimensions for 35mm Motion-Picture Film, Perforated 32mm, 2R-2994, PH22.73-1966).

PH22.56-1971

1.4.11.2 35mm Motion-Picture Film Perforated 32mm, 2R-3000. This is a 35mm film with 16mm perforations so arranged that when 1/2mm are slit down the middle, two 16mm films result, each with one row of perforations. The perforation pitch specified is normally used for positive film and some special-purpose films (American National Standard Dimensions for 35mm Motion-Picture Film, Perforated 32mm, 2R-3000, PH22.138-1964, Reaffirmed 1969).

1.4.11.3 32mm Motion-Picture Film, 2R-2994. This is a film 32mm in width which if slit down the middle would result in two 16mm films each having one row of perforations (American National Standard Dimensions for 32mm Motion-Picture Film, 2R-2994, PH22.141-1965, Reaffirmed 1969). This perforation pitch is used mainly on negative film.

1.4.11.4 32mm Motion-Picture Film, 2R-3000. This is a film 32mm in width which when slit down the middle results in two 16mm films, each having one row of perforations (American National Standard Dimensions for 32mm Motion-Picture Film, 2R-3000, PH22.71-1965, Reaffirmed 1969). This perforation pitch is used mainly on positive film.

1.4.11.5 35mm Motion-Picture Film Perforated 16mm, 3R-2994 (1-3-0). This is a 35mm film with 16mm perforations (American National Standard Dimensions for 35mm Motion-Picture Film Perforated 16mm, 3R-2994 (1-3-0), PH22-171-1968). The principal use of this film stock is as an intermediate film in the production of prints by the double-rank printing system.

NOTE: Numerals (e.g., 1-3-0) are added to the title of some standards to specify how the rows of perforations are placed on the film. The perforation rows are numbered starting at the reference edge. The reference edge is the edge nearest to that row of perforations which is retained in one of the 16mm strips that may be generated by appropriate slitting of the parent 35mm film. A row of perforations which is discarded is always given the number 0.

1.4.11.6 35mm Motion-Picture Film Perforated 16mm, 3R-3000 (1-3-0). This is a 35mm film with 16mm perforations so arranged that if 3mm are slit from the selvage edge of the film and the film were slit down the middle, two 16mm films would result, each having one row of per-

forations (American National Standard Dimensions for 35mm Motion-Picture Film Perforated 16mm, 3R-3000 (1-3-0), PH22.170-1968). The perforation pitch, 0.3000 in, is normally used for positive film.

1.4.11.7 32mm Motion-Picture Film, 4R-2994. This is a film 32mm in width which when slit down the middle results in two 16mm films, each having two rows of perforations (American National Standard Dimensions for 32mm Motion-Picture Film, 4R-2994, PH22.142-1965, Reaffirmed 1969). This perforation pitch is normally used on negative film.

1.4.11.8 32mm Motion-Picture Film, 4R-3000. This is a film 32mm in width which when slit down the middle results in two 16mm films, each having two rows of perforations (American National Standard Dimensions for 32mm Motion-Picture Film, 4R-3000, PH22.72-1965, Reaffirmed 1969). This perforation pitch is normally used on positive film.

1.4.11.9 16mm Motion-Picture Film, 1R-2994. This film is 16mm in width, perforated along one edge only (American National Standard Dimensions for 16mm Motion-Picture Film, 1R-2994, PH22.109-1965, Reaffirmed 1969). This perforation pitch is normally used on camera film.

1.4.11.10 16mm Motion-Picture Film, 1R-3000. This film is 16mm in width, perforated along one edge only (American National Standard Dimensions for 16mm Motion-Picture Film, 1R-3000, PH22.12-1964, Reaffirmed 1969). This perforation pitch is normally used on sound positive film.

1.4.11.11 16mm Motion-Picture Film, 2R-2994. This film is 16mm in width, perforated along both edges (American National Standard Dimensions for 16mm Motion-Picture Film, 2R-2994, PH22.110-1965, Reaffirmed 1969). This perforation pitch is normally used on both black-and-white and color camera films.

1.4.11.12 16mm Motion-Picture Film, 2R-3000. This film is 16mm in width, perforated along both edges (American National Standard Dimensions for 16mm Motion-Picture Film, 2R-3000, PH22.5-1964, Reaffirmed 1969). This perforation pitch is normally used on silent positive film.

PH22.169-1969). This film is normally used for preprint material.

1.4.13.2 35mm Motion-Picture Film Perforated Super 8, 5R-1667 (1-3-5-7-0). This is a 35mm film with super 8 perforations so arranged that when 0.030 in is slit from one edge and 0.091 in is slit from the factory-marked selvage (discard) edge of the film and slit three more times, four 8mm films would result, each having one row of perforations (Draft American National Standard Dimensions for 35mm Motion-Picture Film Perforated Super 8, 5R-1667 (1-3-5-7-0), PH22.165). The perforation pitch (0.1667 in) is normally used for positive films.

1.4.13.3 16mm Motion-Picture Film Perforated Super 8, 2R-1664 (1-4). This is a 16mm film with super 8 perforations on each edge of the film (Draft American National Standard Dimensions for 16mm Motion-Picture Film Perforated Super 8, 2R-1664 (1-4), PH22.168). The principal use of this film is as an intermediate film in the production of prints by contact printing methods.

1.4.13.4 16mm Motion-Picture Film Perforated Super 8, 2R-1667 (1-4). This is a 16mm film with super 8 perforations on each edge of the film so arranged that when the film is slit down the middle two 8mm films result, each having one row of perforations (Draft American National Standard Dimensions for 16mm Motion-Picture Film Perforated Super 8, 2R-1667 (1-4), PH22-167). The perforation pitch (0.1667 in) is normally used for positive films.

1.4.13.5 16mm Motion-Picture Film Perforated Super 8, 2R-1664 (1-3). (American National Standard Dimensions for 16mm Motion-Picture Film Perforated Super 8, 2R-1664 (1-3), PH22.151-1967) The principal use of this film stock is as an intermediate film in the production of prints by the double-rank printing system.

1.4.13.6 16mm Motion-Picture Film Perforated Super 8, 2R-1667 (1-3). This is a film 16mm in width which when slit down the middle results in two super 8 films (American National Standard Dimensions for 16mm Motion-Picture Film Perforated Super 8, 2R-1667 (1-3), PH22-150-1967). The principal use of this film stock is for the production of prints by the double-rank printing system.

1.4.12 8mm Perforation. The 8mm perforation is rectangular in shape with a height of 0.050 in, a width of 0.072 in and a fillet in each corner with a radius of 0.010 in. (This perforation is identical to the 16mm perforation described in 1.4.11 above but for 8mm use has a pitch of 0.1500 or 0.1497 in.) It is used on the following films:

1.4.12.1 35mm Motion-Picture Film Perforated 8mm, 5R-1500. This is a 35mm film with 8mm perforations so arranged that if 3mm are slit from the selvage edge (identified by circular holes between perforations) and the film slit three times more, four 8mm films would result, each having one row of perforations. The perforation pitch specified is normally used for positive film.

1.4.12.2 35mm Motion-Picture Film Perforated 8mm, 2R-1497. This is a 35mm film with 8mm perforations along each edge. The perforation pitch (0.1497 in) is normally used for negative film and some special purpose films which usually remain unslit.

1.4.12.3 35mm Motion-Picture Film Perforated 8mm, 4R-1500. This is a 35mm film with 8mm perforations so arranged that when 1/2mm are slit from each edge and the film slit down the middle, two 16mm films result which, when slit down the middle, produce four 8mm films, each having one row of perforations. The perforation pitch (0.1500 in) is normally used for positive film.

1.4.12.4 16mm Motion-Picture Film Perforated 8mm, 2R-1500. This is a film 16mm in width which when slit down the middle results in two 8mm films, each having one row of perforations (American National Standard Dimensions for 16mm Motion-Picture Film, Perforated 8mm, 2R-1500, PH22.17-1965, Reaffirmed 1969).

1.4.13 Super 8 Perforation. The super 8 perforation is rectangular in shape, with a height of 0.045 in, a width of 0.036 in and a fillet in each corner with a radius of 0.005 in. It is used in the following films:

1.4.13.1 35mm Motion-Picture Film Perforated Super 8, 2R-1664 (1-0). This is a 35mm film with perforations on each edge (American National Standard Dimensions for 35mm Motion-Picture Film Perforated Super 8, 2R-1664 (1-0),

1.4.13.7 8mm Motion-Picture Film Perforated Super 8, 1R-1667. This film is 8mm in width with a single row of super 8 perforations (American National Standard Dimensions for 8mm Motion-Picture Film Perforated Super-8, 1R-1667, PH22.149-1967). The principal use of this film stock is for camera original film of the reversal type.

1.4.13.8 35mm Motion-Picture Film Perforated 35mm and Super 8, KS 2R-1866/58 3R-1664. This is a 35mm film with 35mm perforations down each edge and three rows of super 8 perforations arranged to produce three like super 8 images. This film, with 35mm pitch (0.1866 in) and super 8 pitch (0.1664 in) is normally used as preprint material for the following film:

1.4.13.9 35mm Motion-Picture Film Perforated 35mm and Super 8, KS 2R-1870/58 3R-1667. This is a 35mm film with 35mm perforations down each edge and three rows of super 8 perforations arranged so that when 0.218 in is slit from each edge and the remaining film slit twice more, three 8mm films would result, each having one row of perforations. The 35mm pitch (0.1870 in) and the super 8 pitch (0.1667 in) are normally used for positive film.

1.4.14 Maurer 8mm Perforation. The Maurer 8mm perforation is rectangular in shape with a height of 0.050 in, a width of 0.0433 in and a fillet in each corner with a radius of 0.005 in. It is used on the following films:

NOTE: All films having Maurer 8mm perforations are referred to as Format M. This film format is proposed by Optonics Technology, Inc., and is designed to permit the inclusion of an optical sound track between the edge of the film and the edge of the perforation.

1.4.14.1 35mm Motion-Picture Film Perforated Format M, 2R-1497. This is a 35mm film with Format M perforations on each edge. The film is normally used as a preprint material for the following film:

1.4.14.2 35mm Motion-Picture Film Perforated Format M, 5R-1500. This is a 35mm film with Format M perforations so arranged that, upon slitting and removal of the salvage edge, four 8mm films would result, each having one row of perforations. This perforation pitch (0.1500 in) is normally used for positive films.

1.4.14.3 16mm Motion-Picture Film Perforated Format M, 2R-1497. This is a 16mm film with Format M perforations on each edge of the film. This film is normally used as a preprint material for the following film:

1.4.14.4 16mm Motion-Picture Film Perforated Format M, 2R-1500. This is a 16mm film with Format M perforations on each edge of the film arranged so that if the film were slit down the middle, two 8mm films would result.

1.5 Photographic Emulsion. A photographic emulsion consists of dispersions of light-sensitive materials in a colloidal medium, usually gelatin, carried as a thin layer on film base.

NOTE: Photographic materials are usually designated as negative or positive types according to their light sensitivity (speed), or usage; negative emulsions, in general, being more sensitive than positive emulsions.

1.5.1 Black-and-White Film. Black-and-white film carries an emulsion in which, after processing, brightness values of a scene are reproduced only in tones of the gray scale.

NOTE: Color prints may also be made on black-and-white film by such methods as iron toning, color development or imbibition (dye transfer).

1.5.2 Color Film. Color film carries one or more emulsions in which, after processing, brightness values of a scene are reproduced in terms of color scales.

1.5.3 Reversal Film. A reversal film is one which, after chemical reversal processing, produces an image having a scale of brightness values directly corresponding to that of the original exposure. Chemical reversal includes first development, bleaching and redevelopment.

1.5.4 Direct Reversal Film. A direct reversal film is one which, processed in a developer and fixing bath, produces an image having a scale of brightness values directly corresponding to that of the original exposure. In this case, reversal is due to the emulsion rather than to the use of a chemical reversal process subsequent to exposure.

1.6 Image (Photographic). An image is any photographically obtained likeness in a processed photosensitive material.

1.6.1 Latent Image. A latent image is the invisible image registered on a photographic emulsion due to the reaction produced in the emulsion by exposure to radiant energy.

NOTE: This image becomes visible after development.

1.6.2 Picture Image. A picture image is a photographically obtained likeness of any object on photographic material.

1.6.3 Sound Image. A sound image is a photographically obtained soundtrack or sound record.

1.6.4 Negative Image. A negative image is a photographic image in which the brightness scale is approximately inverted with respect to the original subject and the brightness scale is inverted. In color negatives the hue scale is usually, but not necessarily, complementary to the hue scale of the original subject and the brightness scale is inverted.

1.6.5 Positive Image. A positive image is a photographic replica in which the tones of the gray scale or color values of the originally photographed subject are represented in their natural order.

1.6.6 Black-and-White Image. A black-and-white image is an image produced on a black-and-white film.

1.6.7 Color Image. A color image is an image produced on a color film.

1.6.8 Anamorphic Image. An anamorphic image is an image which has been produced by an optical system having different horizontal and vertical magnifications.

NOTE: Equal horizontal and vertical magnification is assumed unless the term anamorphic is applied specifically.

1.7 Aspect Ratio. Aspect ratio is the ratio of width to height of a projected picture image.

NOTE: This is the more common usage, although the term is also applied to photographic images and to camera, printer and projector apertures.

1.8 Synchronism. Synchronism is the relation between the picture and sound with respect either to the physical location on the film or films or to the time at which corresponding picture and sound are seen and heard.

1.8.1 Projection Synchronism. Projection synchronism is the time relation between picture and corresponding sound in a projection print.

NOTE: The sound record on a projection print is, in most cases, in advance of the corresponding picture. The displacement is specified in picture frames in the following American National Standards:

Soundtrack	Standard
A 35mm Photographic	PH22.40-1967
B 35mm Magnetic*	PH22.103-1966
C 16mm Photographic	PH22.41-1969
D 16mm Magnetic	PH22.112-1958
E 8mm Magnetic	PH22.135-1962
F Super 8 Photographic	PH22.182
G Super 8 Magnetic	PH22.164-1969

*In this case, the sound is behind the corresponding picture.

1.8.2 Editorial Synchronism. Editorial synchronism is the relationship between the picture and sound film during the editorial process.

NOTE: During the editorial process, the soundtrack and corresponding picture, whether on the same or separate films, are kept in alignment and not offset as for projection. Many composite release negatives are supplied in editorial synchronism.

1.8.3 Camera Synchronism. Camera synchronism is the relation between picture and soundtrack in a composite camera original.

NOTE: Camera synchronism is generally not the same as editorial synchronism. In 16mm single systems the two are normally in projection synchronism but this is not the case for most 35mm single systems (i.e., where picture and sound are recorded on the same film).

1.9 Exposure. Exposure is the process of subjecting a photographic film to suitable intensity of radiant energy for a given time in such manner that it may produce a latent image on an emulsion.

NOTE: Exposure = intensity \times time.

1.10 Processing. Processing is the generic term applied to the total operation necessary to produce a permanent visible image on exposed film.

1.10.1 Development. Development is that part of processing which makes visible the latent image of an exposed photographic emulsion.

1.10.2 Fixing (Fixation). Fixing (fixation) is that part of processing which removes the residual sensitive silver salts from a developed film to render the developed image permanent.

NOTE: During the process of fixation, films are customarily treated to preserve and harden the developed image. Adequate washing or neutralizing treatment is necessary following fixation for image permanence.

1.10.3 Bleaching. Bleaching is that part of processing which converts a developed silver image into a soluble silver salt.

1.11 Printing. Printing is the operation of exposing raw stock by using the processed image of another film as the light modulator.

1.11.1 Contact Printing. Contact printing is that method of printing in which the raw stock is held in intimate contact with the film bearing the image to be copied.

1.11.1.1 Step Contact Printing. Step contact printing is that method of contact printing in which the film being copied and the raw stock are advanced intermittently frame-by-frame, being exposed to the printer light only when stationary.

1.11.1.2 Continuous Contact Printing. Continuous contact printing is that method of contact printing by which the light modulating film and the raw stock move at the same constant speed past the printing aperture.

1.11.2 Projection Printing (Optical Printing). Projection printing (optical printing) is printing by projecting the image to be copied through an optical system onto the raw stock.

NOTE: The printed image with respect to the projected image may be identical, an enlargement or a reduction or anamorphic image; or additional anamorphosis may be added or removed.

1.11.2.1 Step Projection Printing. Step projection printing is that method of optical printing in which the film being copied and the raw stock are advanced intermittently frame-by-frame, being exposed to the printer light only when stationary. The film rate of both films will be the same in 1-to-1 printing and will differ in reduction or enlargement processes.

1.11.2.2 Continuous Projection Printing. Continuous projection printing is that method of optical printing in which the light-modulating film and the raw stock move at a continuous rate at each end of the optical system. The film rate will be the same in 1-to-1 printing and will differ in reduction or enlargement processes.

1.11.3 A and B Printing. A and B printing is a method of making composite images, such as fades, dissolves or effects, in a release printer without requiring a duplicating process.

NOTE: The name comes from the fact that the films are edited into two separate rolls called A and B rolls. The sequences of pictures originally in one roll are in synchronization with opaque leader in the other roll. When these two are printed in a separate operation onto a single roll of raw stock, an opportunity is afforded for the introduction of effects and for eliminating visible splices on the screen.

1.11.4 Double-Rank Printing. Double-rank printing is a method of producing prints on a wide film, two at a time, oriented so that both run in the same direction on the parent film before slitting.

1.12 Projection. Projection is the presentation of an enlarged image of the film on a screen for visual review. In addition the sound may be reproduced for aural review.

1.13 Production. Production is the general term used to describe the processes involved in making all the original material that is the basis for the finished motion picture.

1.14 Editorial Process. Editorial process is the term used to describe the combining, cutting, editing and other preparation of material obtained from the original material to make the finished motion picture.

1.15 Re-recording. Re-recording is the electrical process of transferring sound records from one or more films, magnetic tapes or discs to other films, tapes or discs.

NOTE: Re-recording may be used to combine different sound records into a single record to adjust the frequency-response characteristic or to adjust the relative levels between different scenes and sequences.

1.16 Release. Release is a generic term used to designate films used for or intended for general distribution and exhibition.

1.16.1 Release Negative. A release negative is a complete negative prepared specifically for printing release prints.

NOTE: A release negative may consist of separate picture and sound negatives and may be in either projection or editorial synchronism, depending upon the film-processing technique to be employed in making release prints.

1.16.2 Release Print. A release print is a print made for general distribution and exhibition. It may be on films of 8mm, 16mm, 35mm or 70mm width. Some release prints are composed of two or more 35mm-width films which are projected simultaneously in lateral alignment.

2. Picture Negative Film, Black-and-White and Color

2.1 Picture Negative. A picture negative is any processed film that possesses a negative picture image of the subject or film image to which it was exposed. This term is sometimes erroneously used to refer to the raw film before processing, either with or without exposure.

2.1.1 Original Picture Negative. The original picture negative is the negative film that was exposed in a camera and processed to produce a negative image of the original subject.

2.1.2 Background Plate Negative. A background plate negative is a picture negative which is used for printing background plates.

2.1.3 Picture Library Negative. A picture library negative is a picture negative that is usually held in a film library for use in reproducing scenes which would otherwise have to be made as original material for each production.

2.1.4 Title Negative. A title negative is a negative that is exposed to a title card or to both a title card and background.

2.1.5 Picture Duplicate Negative. A picture duplicate ("dupe") negative is a picture negative made from black-and-white, color or separation master positive films or directly from a picture negative by a reversal process (see 1.5.3 Reversal Film).

NOTE: It may be used for making additional prints or it may be cut and edited to form a part of the picture release negative.

2.1.5.1 Internegative. An internegative film is a negative derived directly from a reversal original film.

NOTE: All other duplicating negatives derived from other than reversal film will be known as duplicate negatives regardless of the generation.

2.1.6 Picture-Release Negative. A picture-release negative is a cut and edited picture negative used for printing the picture portion of release prints.

NOTE: It may consist of intercut original picture negatives, picture dupe negatives, etc., depending upon the choice of available material or the intended use of the release print.

2.1.7 Foreign Picture-Release Negative. A foreign picture-release negative is a picture-release negative prepared specifically for printing foreign-version-release prints.

NOTE: It is almost invariably a duplicate negative.

2.1.8 16mm Picture-Release Negative. A 16mm picture-release negative is a picture-release negative on 16mm film prepared specifically for printing 16mm release prints.

3. Picture Positive Film, Black-and-White and Color

3.1 Picture Print. A picture print is a processed film that possesses a positive picture image of the subject or film image to which it was exposed.

3.1.1 Picture Daily Print. A picture daily print is the first picture print made from the original picture negative for use in checking photographic quality, camera technique, actions, etc.

3.1.2 Picture Work Print. A picture work print is a positive print which usually consists of intercut picture daily prints, picture library prints, prints of dissolves, montages, titles, etc., and has synchronism constantly maintained with the corresponding sound work print.

3.1.3 Picture Library Print. A picture library print is a picture print made from a picture library negative.

3.1.4 Background Plate (Background Print Film). A background plate (background print film) is a picture print made specifically for use in projection background or similar process work, and is a print of a background plate negative.

3.1.5 Picture Master Positive. A picture master positive is a print usually made on a special film, for the purpose of producing picture duplicate negatives.

3.1.5.1 35mm Separation Positive. A 35mm separation positive is a black-and-white film with a positive image of the red, green or blue image component of a color negative. It is usually made by printing through suitable filters from a color negative onto a panchromatic black-and-white film.

3.1.5.2 35mm Protection Master Positive. A 35mm protection master positive film is a positive film made from the final cut and edited black-and-white or color release negative. In case of damage to the release negative, a duplicate negative could be made from this protection master positive. In the case of color, this protection master positive may be a set of three black-and-white separation master positives or a color master positive.

3.1.5.3. 35mm Panchromatic Master Positive. A 35mm panchromatic master positive is a black-and-white print made on a panchromatic film from a color negative for the purpose of making a black-and-white duplicate negative.

3.2 Composite Print. A composite print is a positive film having both picture and corresponding sound on the same film, which may be in editorial or projection synchronism.

3.2.1 Composite Daily Print. A composite daily print is made from an original composite negative or original sound and picture negatives, and is used for checking photography, sound quality, action, etc. It is in projection synchronism.

3.2.2 First Trial Composite Print. The first trial composite is the first composite print made from the picture and sound-release negatives for the purpose of checking and correcting picture and sound quality, negative cutting and assembly, etc. It is in projection synchronism.

3.2.3 Second, Third, Etc., Trial Composite Print. The second, third, etc., trial composite print is similar to the first trial composite print, but has successive corrections incorporated as a result of viewing the previous trial composite prints.

3.2.4 Final Trial Composite. A final trial composite is a composite print, approved for release, in which all corrections found necessary in previous trial composite prints have been incorporated.

NOTE: The final trial composite may be any one of the various trial composite prints, depending upon the type and extent of corrections required.

3.2.5 Composite Master Positive. A composite master positive is a composite print usually made for the purpose of producing composite or picture and sound duplicate negatives which would be used for printing release prints.

NOTE: It is usually made on duplicating positive film and may be in either editorial or projection synchronism.

3.2.6 Foreign-Version-Release Print. A foreign-version-release print is a composite print in projection synchronism with dialogue made specifically for the particular language involved.

NOTE: Sometimes superimposed titles in a different language are used on the print. A superimposed title consists of printed words (usually transparent) overlaying the picture image.

3.2.7 Foreign-Version Trial Composite Prints. Foreign-version trial composite prints are similar to trial composite prints made during release, except that they are made for checking the release of the particular language version involved.

4. Reversal Film, Black-and-White and Color

4.1 Reversal Original. A reversal original is the film that is originally exposed in a camera or recorder and is processed by reversal to produce a positive image.

NOTE: This positive image obtained by the reversal process is not the same as a print from a negative. When viewed by projection on an opaque screen, the emulsion side of the print from a negative must face the light source and the emulsion side of a reversal original must face the lens in order for the screen image to have the same lateral orientation as the original scene.

4.1.1 Composite Reversal Original. A composite reversal original is a reversal original which has both picture and corresponding sound on the same film.

4.1.2 Reversal Duplicate Negative. A reversal duplicate negative is reversal-type film that has been exposed to a negative film image, usually an original picture negative, and processed by the reversal process.

4.2 Reversal Print. A reversal print is a reversal-type film that has been exposed to a positive film image, usually a reversal original film, and processed by the reversal process.

4.2.1 Reversal Master Print, 16mm. A reversal master print is a 16mm reversal print made specifically for use in producing other prints.

NOTE: It is sometimes referred to as a first generation duplicate, prints from it then being referred to as second generation duplicates.

4.2.2 Reduction Reversal Print, 16mm. A reduction reversal print is a reversal print made on 16mm reversal film from a 35mm positive by reduction printing and development by the reversal process.

5. Photographic Sound

NOTE: All definitions in this section will be understood to be photographic unless the term "magnetic" is used. The term "photographic" replaced the term "optical" because the latter describes the method of reproduction and not the sound record itself.

5.1 Photographic Sound. Photographic sound is a sound record in the form of a photographic image.

5.2 Sound Negative. A sound negative is any film that, after exposure and subsequent processing, produces a negative sound record on the film. This sound record requires the steps of printing and processing of a second film in order to obtain a reasonably faithful reproduction of the original sound, by the conventional scanning system.

NOTE: The negative image may be obtained by exposure through a positive sound image; by direct recording; or, by the reversal process, from another sound negative.

5.2.1 Original Sound Negative. The original sound negative is the sound negative that is exposed in a film recorder and, after processing, yields a negative sound image on the film.

5.2.2 Sound-Effects Negative. A sound-effects negative is a sound negative upon which sound effects have been recorded. It is ordinarily held in library stock.

5.2.3 Music Negative. A music negative is a sound negative upon which music has been recorded. It is usually an original sound negative but may be a library negative.

5.2.4 Sound Cut Negative. A sound cut negative is a sound negative that is composed of sections of original sound negatives spliced in sequence.

NOTE: The sound cut negative is generally in exact conformity with the sound work print and produces a single sequentially spliced negative. The print of the sound cut negative provides all, or portions of, the re-recording print.

5.2.5 Re-recorded Negative. A re-recorded negative is a sound negative which is exposed by re-recording and, when processed, yields a negative sound track image on the film.

5.2.6 Sound Release Negative. A sound release negative is a photographic sound negative in the form required for the final printing operation onto the release print raw stock.

NOTE: The sound release negative may consist of re-recorded negatives, intercut original sound negatives, duplicate negatives of sound records, etc., depending upon the choice of available material or the intended use of the print.

5.2.7 Special Sound Release Negative. A special sound release negative is a sound release negative made for the purpose of obtaining a sound track which has characteristics other than those obtained from the sound release negative.

NOTE: Three common forms of special sound release negatives are those listed under 5.2.7.1, 5.2.7.2 and 5.2.7.3.

5.2.7.1 Special Sound Release Negative for Use in 16mm Release of 35mm Preprint Material. The special sound release negative for 16mm release of 35mm original material is a photographic sound negative, either 35mm or 16mm, recorded with specific characteristics for reasonably faithful reproduction of the original sound on 16mm reproduction equipment. It may be re-recorded from a print of the 35mm sound release negative or from the 35mm re-recording print.

5.2.7.2 Special Sound Release Negative, Foreign Release in English. The special sound release negative for use in English version for foreign release is re-recorded from the re-recording print, except that the dialogue track is modified to remove American colloquialisms.

5.2.7.3 Special Sound Release Negative, Foreign-Language Version. The special sound release negative for use in foreign-language version release is usually re-recorded using all of the re-recording tracks, except the dialogue track, for which is substituted a special synchronized dialogue track in the foreign language for which the release is being made.

5.2.8 Sound Release Dupe Negative. A sound release dupe negative is a duplicate negative of the sound record prepared specifically for printing the sound track of release prints.

5.3 Sound Print. A sound print is any positive obtained by printing from a sound negative, or direct positive recording, or, by the reversal process, from another sound positive. A sound print provides a reasonably faithful reproduction of the original sound through the conventional scanning system.

5.3.1 Sound Daily Print. A sound daily print is the first sound print made from the original sound negative for checking sound quality, technique, etc.

5.3.2 Sound Work Print. A sound work print is a sound print that usually consists of intercut sound daily prints, but may also include other sound tracks of sound effects or music, or both, on the same or separate films, with synchronism constantly maintained with the corresponding picture work print.

5.3.3 Sound-Effects Print. A sound-effects print is a sound print made from a sound-effects negative, or from another sound-effects print by reversal processing.

5.3.4 Music Print. A music print is a sound print made from a music negative.

5.3.5 Re-recording Print. A re-recording print is a sound print prepared specifically for use in re-recording to produce a re-recorded negative.

NOTE: A re-recording print may be a print from a sound cut negative, a specially intercut print, or a combination of both. It usually consists of several sound records on separate films that include dialogue, sound effects, music, or any other required material. The term is used interchangeably to designate the entire group of associated films or any individual film that is part of the group.

5.3.6 Re-recorded Print. A re-recorded print is a sound print from a re-recorded sound-track negative.

5.3.7 Sound Check Print. A sound check print is a sound print made from the sound release negative for the purpose of checking negative cutting, printing lights, sound quality, etc.

NOTE: When a sound check print is required, it is usually made prior to the first trial composite print.

5.3.8 Sound Master Positive. A sound master positive is a sound print on special film stock that is usually made from a sound release negative for the purpose of producing duplicate negatives of the sound record for release printing.

5.4 Composite Print (See 3.2)

[3.2 Composite Print. A composite print is a positive film having both picture and corresponding sound on the same film, which may be in editorial or projection synchronism.]

5.4.1 Composite Daily Print (See 3.2.1)

[3.2.1 Composite Daily Print. A composite daily print is made from an original composite negative or original sound and picture negatives, and is used for checking photography, sound quality, action, etc. It is in projection synchronism.]

6. Magnetic Sound

6.1 Magnetic Sound Film (See 1.3)

[1.3 Magnetic Sound Film. Magnetic sound film is a film base having film perforations along one or both edges and bearing a magnetic coating, either completely across the film or in stripes, the coating capable of accepting and reproducing sound records. Note: Unperforated materials usually are referred to as magnetic tape.]

6.2 Full-Coat Magnetic Film. Full-coat magnetic film has the magnetic-coating compound applied across the film from edge to edge.

7.1.1 Composite Release Print. A composite release print is a print having both picture and sound records in projection synchronism on the same film.

NOTE: The sound record may be photographic, magnetic, or both.

7.1.2 Domestic Release Print. A domestic release print is a release print intended for distribution within the country where the print was manufactured and having dialogue in the language of that country. It may be a composite print or may have magnetic sound track or tracks on a separate film.

7.1.3 Foreign-Version Release Print. (See 3.2.6)

[3.2.6 Foreign-Version Release Print. A foreign-version release print is a composite print in projection synchronism with dialogue made specifically for the particular language involved. Note: Sometimes superimposed titles in a different language are used on the print. A superimposed title consists of printed words (usually transparent) overlaying the picture image.]

7.2 Anamorphic Release Print. An anamorphic release print is a release print in which the picture image is compressed laterally, requiring a deanamorphosing lens on the projector to cause objects in the projected picture to have correct proportions.

7.3 Wide-Screen Release Print. A wide-screen release print is a print which has no anamorphosis but, when projected, produces a screen image having an aspect ratio greater than 1.33 to 1.

NOTE: Some prints are made from negatives exposed in a camera aperture having an aspect ratio of 1.33 to 1, but which have been composed for projection to yield a projected picture having an aspect ratio greater than 1.33 to 1. A wide-screen print may also be obtained from an anamorphic negative by deanamorphosing in the printing process.

7.4 Magoptical Release Print. A magoptical release print is a composite release print which has both magnetic and photographic (optical) sound tracks.

6.2.1 Full-Coat Between Perforations Magnetic Film. Full-coat between perforations magnetic film has the magnetic-coating compound across the film from perforation to perforation.

6.3 Magnetic Striping. Magnetic striping is a process by which a magnetic-coating compound is applied in the form of single or multiple stripes, having specific widths and placements, to either surface of a film base which may or may not have a photographic emulsion.

6.4 Balance Stripe. A balance stripe is a magnetic coating or coating of another material that is equal in thickness to, but may be narrower than, the stripe used for recording. It is applied along the edge of the film, opposite the stripe used for recording. Its primary purpose is to equalize the effective thickness of the two edges of the striped film in order to obtain uniform winding. The stripe is sometimes used for the recording of additional sound or control records.

6.5 Magnetic Original. A magnetic original is the original or first sound record on a magnetic film.

6.6 Magnetic Transfer. A magnetic transfer is a magnetic sound record obtained by electrical re-recording of a magnetic original onto another magnetic film.

6.7 Magnetic Master. A magnetic master is a final edited or re-recorded magnetic sound record used for transfer to a magnetic release print or for transfer to a photographic sound negative to be used for manufacturing prints with photographic sound tracks.

6.8 Magoptical Release Print. (See 7.4)

7. Release Prints

7.1 Release Print. (See 1.16.2)

[1.16.2 Release Print. A release print is a print made for general distribution and exhibition. It may be on films of 8mm, 16mm, 35mm or 70mm width. Some release prints are composed of two or more 35mm-width films which are projected simultaneously in lateral alignment.]

Index

Aspect ratio 1.7
 Background plate 3.1.4
 Balance stripe 6.4
 Base
 film 1.2.2
 safety 1.2.2.1
 Bleaching 1.10.3
 Development 1.10.1
 Editorial process 1.14
 synchronism 1.8.2
 Emulsion, photographic 1.5
 Exposure 1.9
 Film
 background print 3.1.4
 base 1.2.2
 black-and-white 1.5.1
 color 1.5.2
 composite reversal original 4.1.1
 direct reversal 1.5.4
 magnetic sound 1.3, 6.1
 full-coat 6.2
 full-coat between perforations 6.2.1
 master 6.7
 original 6.5
 transfer 6.6
 motion-picture 1.2
 protection master positive, 35mm 3.1.5.2
 raw stock 1.2.1
 reversal 1.5.3
 reversal original 4.1
 separation positive, 35mm 3.1.5.1
 Film perforations 1.4
 pitch 1.4.1
 8mm 1.4.1.2
 35mm perforated 8mm, 2R-1497 1.4.1.2.2
 4R-1500 1.4.1.2.3
 5R-1500 1.4.1.2.1
 16mm perforated 8mm, 2R-1500 1.4.1.2.4
 super 8 1.4.1.3
 35mm perforated super 8, 1.4.1.3.1
 2R-1664 (1-0) 1.4.1.3.1
 3R-1667 (1-3-57-0) 1.4.1.3.2
 35mm perforated 35, 2R KS-1866 1.4.1.3.8
 and super 8, 3R-1664 1.4.1.3.9
 2R KS-1870 and super 8, 3R-1667 1.4.1.3.9
 16mm perforated super 8, 1.4.1.3.5
 2R-1664 (1-3) 1.4.1.3.5
 2R-1664 (1-4) 1.4.1.3.3
 2R-1667 (1-3) 1.4.1.3.6
 2R-1667 (1-4) 1.4.1.3.4
 8mm perforated super 8, 1R-1667 1.4.1.3.7
 Maurer 8 (Format M) 1.4.1.4
 35mm perforated Format M, 2R-1497 1.4.1.4.1
 5R-1500 1.4.1.4.2
 16mm perforated Format M, 2R-1497 1.4.1.4.3
 2R-1500 1.4.1.4.4
 16mm 1.4.1.1
 35mm perforated 16mm, 1.4.1.1

3R-2994 (1-3-0) 1.4.11.5
 3R-3000 (1-3-0) 1.4.11.6
 16mm, 1R-2994 1.4.11.9
 1R-3000 1.4.11.10
 2R-2994 1.4.11.11
 2R-3000 1.4.11.12
 35mm perforated 32mm, 2R-2994 1.4.11.2
 2R-3000 1.4.11.2
 32mm, 2R-2994 1.4.11.3
 2R-3000 1.4.11.4
 4R-2994 1.4.11.7
 4R-3000 1.4.11.8
 35mm, BH-1866 1.4.2
 BH-1870 1.4.3
 CS-1870 1.4.7
 DH-1870 1.4.6
 KS-1866 1.4.4
 KS-1870 1.4.5
 65mm, KS-1866 1.4.8
 KS-1870 1.4.9
 70mm perforated 65mm, KS-1870 1.4.10
 Fixing (Fixation) 1.10.2
 Image (photographic) 1.6
 anamorphic 1.6.8
 black-and-white 1.6.6
 color 1.6.7
 latent 1.6.1
 negative 1.6.4
 picture 1.6.2
 positive 1.6.5
 sound 1.6.3
 Internegative 2.1.5.1
 Magnetic striping 6.3
 Motion picture 1.1
 Negative
 background plate 2.1.2
 foreign picture-release 2.1.7
 internegative 2.1.5.1
 original picture 2.1.1
 picture 2.1
 picture duplicate 2.1.5
 picture library 2.1.3
 picture release 2.1.6
 picture release, 16mm 2.1.8
 release 1.16.1
 reversal duplicate 4.1.2
 title 2.1.4
 Perforation, see Film perforations
 pitch 1.4.1
 Photographic sound 5.1
 Print
 background plate 3.1.4
 composite 3.2
 composite daily 3.2.1
 composite master positive 3.2.5
 final trial composite 3.2.4
 first trial composite 3.2.2
 foreign-version release 3.2.6

foreign-version trial composite 3.2.7
 panchromatic master positive, 35mm 3.1.5.3
 picture 3.1
 picture daily 3.1.1
 picture library 3.1.3
 picture master positive 3.1.5
 picture work 3.1.2
 protection master positive, 35mm 3.1.5.2
 reduction reversal, 16mm 4.2.2
 release 1.16.2
 reversal 4.2
 reversal master, 16mm 4.2.1
 separation positive, 35mm 3.1.5.1
 trial composite, second, third, etc. 3.2.3
 Printing 1.11
 A and B 1.11.3
 contact 1.11.1
 continuous 1.11.1.2
 step 1.11.1.1
 double-rank 1.11.4
 projection (optical) 1.11.2
 continuous 1.11.2.2
 step 1.11.2.1
 Processing 1.10
 Production 1.13
 Projection 1.12
 printing 1.11.2
 synchronism 1.8.1
 Raw stock 1.2.1
 Release 1.16
 negative 1.16.1
 print 1.16.2, 7.1
 anamorphic 7.2
 composite 7.1.1
 domestic 7.1.2
 foreign-version 7.1.3


American National Standard dimensions of projectable anamorphic image area on 35mm motion-picture film 2.35:1 aspect ratio

Approved June 16, 1971 Secretariat: Society of Motion Picture and Television Engineers, Inc.

Page 1 of 2 pages

1. Scope
This standard specifies the maximum dimensions of the film image area intended for projection from a 35mm anamorphic motion-picture print with a compression ratio of 2:1 and an aspect ratio of 2.35:1, and the placement of this area relative to the perforations and the reference edge of the film.

2. Dimensions
The dimensions shall be as given in the figure and table.

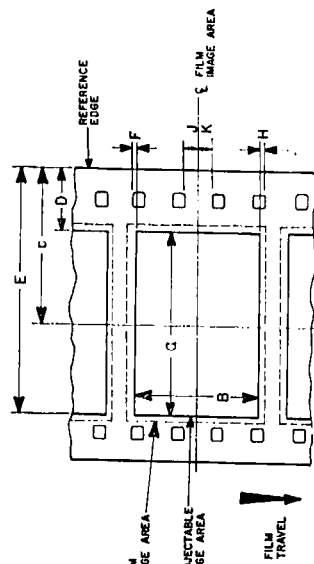

PROJECTABLE AREA ON FILM AS SEEN LOOKING THROUGH THE LENS TOWARD THE LENS

Dimensions	Inches	Millimeters
B	0.700 max	17.78 max
D	0.318 min	8.08 min
E	1.158 max	29.41 max
F = H	within 0.012	within 0.30
a	0.838 nom	21.29 nom
c*	0.738 nom	18.75 nom
j = k	nominally equal	nominally equal

The following values are included for convenience

*See Appendix A1.

CAUTION NOTICE This American National Standard may be revised or withdrawn at any time. The procedures of the American National Standards Institute require that action be taken to reaffirm, revise, or withdraw this standard no later than five (5) years from the date of publication. Purchasers of American National Standards may receive current information on all standards, by calling or writing the American National Standards Institute, 1430 Broadway, New York, N.Y. 10018. Printed in USA



Copyright © 1971 by American National Standards Institute 1430 Broadway, New York, N.Y. 10018

3. Relationship to Other Standards

3.1 This standard may be used as the basis for establishing picture areas from original photography for final viewing because it presents a description of the picture area on the projection print that is usable for the indicated purposes of the print (which is of primary importance because the projection print is the most commonly interchanged item). (See Appendix A2.)

NOTE 1: Camera and Printer Apertures. The actual image on the film is significantly larger than the maximum area intended for projection, so that in placement of the images throughout the sequence of films the tolerance is not restrictive of commercial practice. Upper limits have been established through considerations of good practice in avoiding frame overlap, encroachment upon areas reserved for sound records, flare from perforation edges, etc. Lower limits are similarly related to the avoidance of image effects at a defined edge, tolerances in film positioning, etc.

NOTE 2: Projector Aperture. Dimensions B, D, and E define the maximum image area on the film that is available for projection. They do not define the opening in the aperture plate of a projector. The size of this opening may differ from Dimensions a and B, for example, because of the physical separation necessary between the aperture plate and the film to avoid scratching the film, the slant of the marginal rays accepted by the projection lens, etc.

NOTE 3: Actual Projected Area. It is recognized that, in many cases, the actual film image area that is projected may be smaller than the projectable maximum and, in some cases, may be non-rectangular (for example, on irregular four-sided figure bound by either straight or

3.2 The following standards define image areas for other important phases of motion-picture operations, and are consistent with this standard and with one another under currently acceptable commercial practices:

- Dimensions of 35mm Motion-Picture Camera Aperture Images, PH22.59-1966
- Dimensions of Exposed Areas for Picture and Photographic Sound on 35mm Motion-Picture Prints Made on Continuous Contact Printers, PH22.111-1965 (Reaffirmed 1969)

curved lines). Such departures may result from equipment considerations, such as slight inconsistencies among lenses, screen sizes, etc.; from geometric limitations such as the screen surface being at an angle other than 90° from the projection axis, or being non-planar, or both; and from aesthetic considerations such as pictorial composition within more restrictive image limits. In the absence of specific instructions to the contrary, it is intended that the actual projected film image area be the largest appropriately-shaped figure that can be inscribed within the specified dimensions.

NOTE 4: Film Perforations. Film intended for projection with this image area is normally perforated as specified in American National Standard Dimensions for 35mm Motion-Picture Film, DH-1870, PH22.1-1964 (Reaffirmed 1969); American National Standard Dimensions for 35mm Motion-Picture Film, KS-1870, PH22.96-1964 (Reaffirmed 1969), and American National Standard Dimensions for 35mm Motion-Picture Film, CS-1870, PH22.102-1964 (Reaffirmed 1969).

NOTE 5: Print Preparation. Prints conforming to this standard are prepared for use as specified in American National Standard Dimensions for Four-Track Magnetic Sound Records for 35mm Release Prints, PH22.137-1963 (Reaffirmed 1969).

Appendix

(The Appendix is not a part of this American National Standard, but is included to facilitate its use.)

A1. Centerlines

The centerlines of the image area are given for convenience in interpreting the standard, facilitating such applications as the optical design of equipment, and assisting in the understanding of suitable mechanical embodiments related to projectable image area. Note that the centerline of the projectable image areas is displaced from the centerline of the film by 0.050 in (1.27mm) nominal.

A2. Projectable Image Area

Essentially, the entire image within the maximum established by this standard will be transferred in such operations as reduction or enlargement printing. Since the entire area will be presented, it is important that the projectable area include only material that meets recognized standards for technical and artistic excellence.

American National Standard dimensions for printed area in super 8 printing on 16/8mm film perforated 1-4


Approved June 16, 1971

Secretariat: Society of Motion Picture and Television Engineers, Inc.

Page 1 of 2 pages

1. Scope

This standard specifies the location and size of the super 8 printed picture area for negative/positive and reversal printing operations onto 16mm motion-picture film perforated super 8 (1-4), 2R-1664 or 2R-1667.

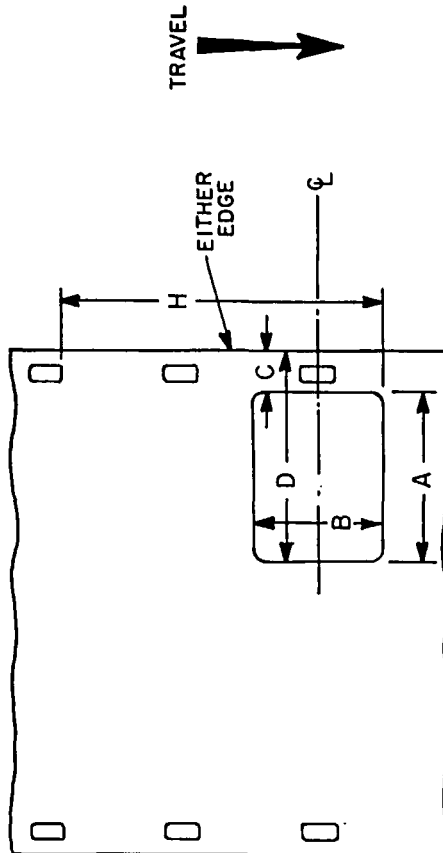

Dimensions	Inches	Millimeters
A	0.228 ref	5.70 ref
B	0.162 min	4.11 min
C	0.058 max	1.47 max
D	0.282 min	7.16 min
H	0.393 ± 0.002	9.98 ± 0.05

CAUTION NOTICE: This American National Standard may be revised or withdrawn at any time. The procedures of the American National Standards Institute require that action be taken to reaffirm, revise, or withdraw this standard no later than five (5) years from the date of publication. Purchasers of American National Standards may receive current information on all standards by calling or writing the American National Standards Institute, 1430 Broadway, New York, N.Y. 10018. Printed in USA.

Copyright © 1971 by American National Standards Institute 1430 Broadway, New York, N.Y. 10018

2. Dimensions

2.1 The dimensions shall be as given in the figure and table.

2.2 Dimension H is measured from the minus-2 perforation because this perforation position coincides with the perforation used to position the resulting 8mm print in the projector. (See Appendix.)

2.3 Two images may be printed on this film. The image area on the left side, not shown in the figure, is symmetrical but opposite in direction to that shown on the right side. The dimensions for each image area, however, are taken from the nearest edge of the film as shown.

NOTE 1: The reduction ratio of prints made from 16mm negatives or reversal originals shall be approximately 1.8:1. The correct reduction ratio is controlled by Dimensions C and D.

NOTE 2: The vertical Dimension B of the reduced super 8 image of the original camera aperture image should be centered on the horizontal centerline of the perforation within the limits of Dimension H.

NOTE 3: The aperture corners may be rounded with a radius of 0.005 inch (0.13mm) or less.

NOTE 4: The "travel" shown in the figure is to aid in illustrating the minus-2 perforation and is the direction of motion in the projector for the resulting 8mm print if the figure is as seen from the light source of a projector used for direct front projection.

NOTE 5: If photographic sound will be applied to the print, it will be necessary to restrict the value for Dimension D to avoid intrusion into the sound track area.

Appendix

(The Appendix is not a part of this American National Standard, but is included to facilitate its use.)

If prints are made with a step printer, the registration device should be in the minus-2 perforation with respect to the printed aperture to obtain the maximum benefit of cancellation as films are projected in accordance with

American National Standard Specifications for Projector Usage of Super 8 Motion-Picture Film, PH22.155-1967, which specifies the use of the minus-2 perforation to position projected films.