


American National Standard dimensions for 16-mm motion-picture film perforated 1R

Approved October 6, 1980
Secretariat: Society of Motion Picture and Television Engineers

Page 1 of 2 pages

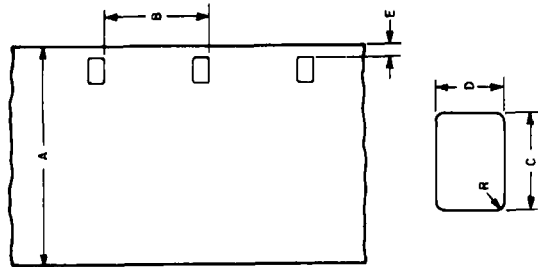

1. Scope

This standard specifies the cutting and perforating dimensions for 16-mm motion-picture film with perforations along one edge and a perforation pitch of either 0.2994 or 0.3000 in (7.605 or 7.620 mm).

2. Dimensions

2.1 The dimensions shall be as given in the figure and table.

2.2 The dimensions pertain to a safety film as defined in American National Standard Specifications for Motion-Picture Safety Film, ANSI PH22.31M-1980.

2.3 The dimensions apply at the time of cutting and perforating for film adjusted to a temperature of $23 \pm 1^\circ\text{C}$ (nominally converted to $73 \pm 2^\circ\text{F}$) and a relative humidity of 50 ± 2 percent. The manufacturer may indicate other nominal temperature and humidity conditions under which the dimensions apply.

Dimensions	Inches	Millimeters
A Film width	0.628 ± 0.001	15.95 ± 0.03
B Perforation pitch (long)	0.3000 ± 0.0004	7.620 ± 0.010
B' Perforation pitch (short)	0.2994 ± 0.0004	7.605 ± 0.010
C Perforation width	0.0720 ± 0.0004	1.829 ± 0.010
D Perforation height	0.0500 ± 0.0004	1.270 ± 0.010
E Edge to perforation	0.0355 ± 0.0020	0.902 ± 0.051
L 100 consecutive perforation pitches (long)	30.00 ± 0.03	762.0 ± 0.8
L' 100 consecutive perforation pitches (short)	29.94 ± 0.03	760.5 ± 0.8
R Radius of perforation fillet	0.010 ± 0.001	0.25 ± 0.03

CAUTION NOTICE: This American National Standard may be revised or withdrawn at any time. The procedures of the American National Standards Institute require that action be taken to reaffirm, revise, or withdraw this standard no later than five years from the date of publication. Purchasers of American National Standards may receive current information on all standards by calling or writing the American National Standards Institute. Printed in USA

ANSI American National Standards Institute, 1430 Broadway, New York, N.Y. 10018
Reprinted with permission of the Society of Motion Picture and Television Engineers.

PH22.109-1980

foration shape (BH, KS, DH, or CS) or the number of rows of perforations (1R, 2R, etc.), depending upon which is the significant factor, or the perforation pitch without the decimal point.

Appendix

The Appendix is not a part of this American National Standard, but is included for information purposes only.

A1. The user is reminded that, as a plastic, film can change dimensions temporarily due to moisture or temperature, or permanently due to solvent loss or strain effect.

A2. Film for positive use has a longitudinal pitch 0.2 percent longer than its companion negative. Shrinkage of the negative during aging and processing prior to printing will generally not exceed 0.2 percent. Thus, the negative stock is expected to be 0.3 ± 0.1 percent shorter than the positive. This difference will minimize slippage between the two on the 12-in (305-mm) circumference sprocket of the printer, assuming a film thickness of 0.0055 to 0.0065 in (0.140 to 0.165 mm).

A3. The uniformity of pitch, hole size, and margin (Dimensions B, C, D, and E) is an important variable affecting steadiness. Variations in these dimensions, from roll to roll, are of little significance compared to variations from one perforation to the next within any small group of consecutive perforations. As an example, the uniformity of the margin is uniquely critical for optical printing.

A4. For historical background on the development of this standard, refer to A. J. Miller and A. C. Robertson, "Motion-picture film—its size and dimensional characteristics," *Jour. SMPTE*, 74: 3-11, Jan. 1965.

NOTE: The title of this standard was established by the application of a nomenclature system developed for all film dimension standards. Each title provides an indication of the film width, a code designation for the perforation, or the perforation pitch without the decimal point.