

**for motion-picture film (35-mm) —
recorded characteristic of
magnetic audio records —
four-track striped release prints**

PH22.216

1. Scope

This standard specifies the recorded characteristic of magnetic audio records on 35-mm four-track striped motion-picture release prints, when reproduced at 24 frames per second or approximately 90 ft (27 m) per minute.

2. Recorded Characteristic

With a constant-amplitude sine-wave signal applied to the input of the recording system, the relative characteristic in effective values of the short circuit magnetic flux versus frequency shall decrease with increasing frequency proportionately to the impedance of a parallel combination of a capacitance and a resistance having time constants of 35 and 3180 μ s. (See Note 1.) The characteristic defined above is obtained by the following equation:

$$L_{\phi} = C_0 - 10 \log_{10} \left(\frac{1 + (2\pi\tau_1)^2 f^2}{1 + 1/[(2\pi\tau_2)^2 f^2]} \right)$$

where L_{ϕ} is the recorded relative short circuit magnetic flux level in decibels, f is the frequency in hertz for which L_{ϕ} is computed, τ_1 is the low-frequency time constant of 3180 μ s, τ_2 is the high-


frequency time constant of 35 μ s, and C_0 is a constant with a value of 0.194 calculated to make $L_{\phi} = 0$ at the reference frequency of 1000 Hz. The approximate numerical values are given in the table. (See Note 2.)

Frequency, Hz f	Relative Level L_{ϕ}
31.5	+ 5.67
40	+ 4.29
50	+ 3.21
80	+ 1.63
100	+ 1.16
160	+ 0.59
400	+ 0.23
1000	0.00
2500	- 0.95
4000	- 2.29
6300	- 4.46
8000	- 5.93
10 000	- 7.47
12 500	- 9.13
16 000	- 11.07

3. Tolerances

Magnetic audio records on the film shall be recorded to the characteristic specified in Sec. 2 within the tolerances given in the figure.

Page 2 of 2 pages

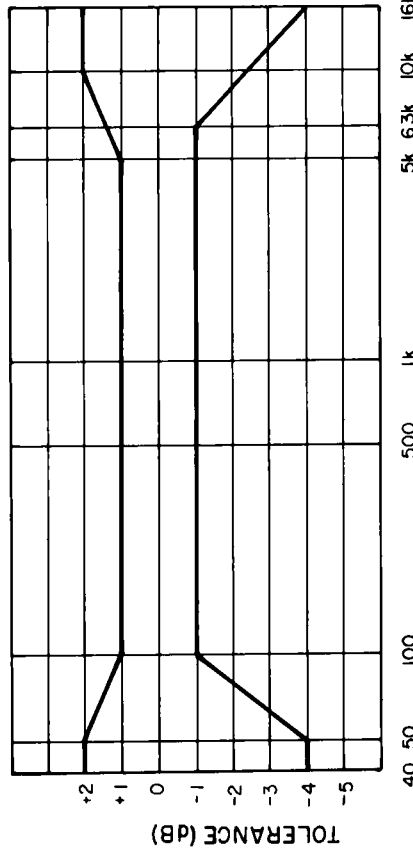

FREQUENCY (Hz)

Tolerances on Recorded Levels

Note 1: A time constant is a shorthand notation, such as illustrated by a frequency response curve, having a shape which results from a time constant of one or more microseconds. This is a convenient way of defining a response curve and is never intended as a recommended electrical circuit.

Note 2: The corresponding reproducing characteristic is that which gives a flat response.

Note 3: It has been shown that a straight 35- μ s curve should be used for optimal use of the magnetic medium. It is recognized, however, that it is necessary for the immediate future to continue to add 3180 μ s because some theater equipment is unable to compensate for the low end.


THIS PROPOSAL IS PUBLISHED FOR COMMENT ONLY

PH22.216

Proposed American National Standard
**for motion-picture film (70-mm)—
 recorded characteristic of
 magnetic audio records—
 striped release prints**

PH22.217

Page 2 of 2 pages

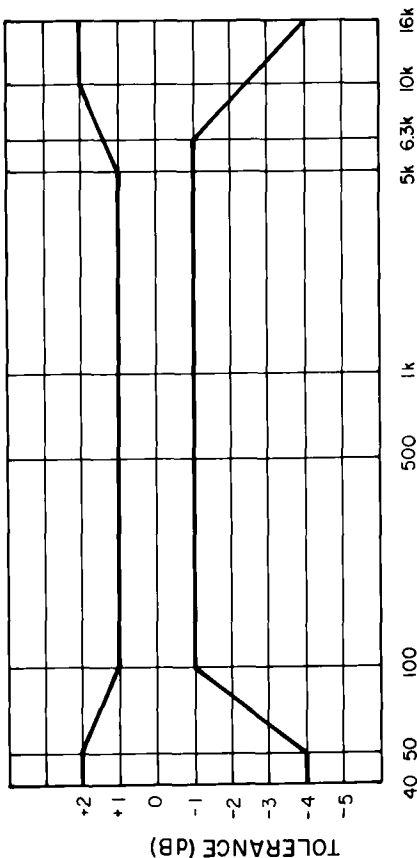

Tolerances on Recorded Levels

Note 1: A time constant is a shorthand notation, such as illustrated by a frequency response curve, having a shape which results from a time constant of one or more microseconds. This is a convenient way of defining a response curve and is never intended as a recommended electrical circuit.

Note 2: The corresponding reproducing characteristic is that which gives a flat response.

Note 3: It has been shown that a straight 35-μs curve should be used for optimal use of the magnetic medium. It is recognized, however, that it is necessary for the immediate future to continue to add 3180 μs because some theater equipment is unable to compensate for the low end.

Page 1 of 2 pages

frequency time constant of 3180 μs, τ_m is the high-frequency time constant of 35 μs, and C_0 is a constant with a value of 0.194 calculated to make $L_\phi = 0$ at the reference frequency of 1000 Hz. The approximate numerical values are given in the table. (See Note 2.)

Frequency, Hz f	Relative Level L_ϕ
31.5	+ 5.67
40	+ 4.29
50	+ 3.21
80	+ 1.63
100	+ 1.16
160	+ 0.59
400	+ 0.23
1000	0.00
2500	- 0.95
4000	- 2.29
6300	- 4.46
8000	- 5.93
10 000	- 7.47
12 500	- 9.13
16 000	- 11.07

1. Scope

This standard specifies the recorded characteristic of magnetic audio records on 70-mm striped motion-picture release prints, when reproduced at 120 perforations per second (approximately 112 ft [(34 m)] per minute or 22.4 in [569 mm] each) per second, which is 24 frames (5 perforations each) per second.

2. Recorded Characteristic

With a constant-amplitude sine-wave signal applied to the input of the recording system, the relative characteristic in effective values of the short circuit magnetic flux versus frequency shall decrease with increasing frequency proportionately to the impedance of a parallel combination of a capacitance and a resistance having time constants of 35 and 3180 μs. (See Note 1.) The characteristic defined above is obtained by the following equation:

$$L_\phi = C_0 - 10 \log_{10} \left(\frac{1 + (2\pi\tau_m)^2 f^2}{1 + 1/[(2\pi\tau_c)^2 f^2]} \right)$$

where L_ϕ is the recorded relative short circuit magnetic flux level in decibels, f is the frequency in hertz for which L_ϕ is computed, τ_c is the low-

3. Tolerances

Magnetic audio records on the film shall be recorded to the characteristic specified in Sec. 2 within the tolerances given in the figure.