

Standards and Recommended Practices

Proposed American National Standards

The fundamental parameters for the first standardized broadcast-quality digital videotape recording format were approved by the Society's Working Group on Digital Television Tape Recording, the Video Recording and Reproduction Technology Committee, and the Standards Committee.

The D-1 format is intended for professional studio use with component digital video signals encoded according to international CCIR standards for the 525-line NTSC broadcast television system. This truly universal format for broadcast program exchange has been achieved through close cooperation with the MAGNUM Specialist Group of the European Broadcasting Union and the CCIR. Although some input and output signal processing differences will exist to suit 525- and 625-line broadcast practices, all video signals recorded on tape by a Type D-1 recorder anywhere in the world will be identical and will conform to the 4:2:2 (13.5:6.75:6.75 MHz) sampling procedure of CCIR Recommendation 601, the internationally agreed specification for component (Y, B-Y, R-Y) digital television signals. Similarly, the digital audio signals will basically conform to specifications agreed to by the EBU and the Audio Engineering Society.

The format is unique in two respects: First, the mechanisms and signal processing systems can be used worldwide for any digital television signals that conform to CCIR Recommendation 601. Second, the designer of a D-1 tape transport mechanism can use one of several different combinations of tape scanner diameters and data head arrangements. The format permits different design choices for different applications.

Published here for a trial period and public review are five Proposed American National Standards on the 19-mm Type D-1 format: SMPTE 224M, Component Digital Video Recording — 19-mm Type D-1 Cassette — Tape Record; SMPTE 225M, Component Digital Video Recording — 19-mm Type D-1 Cassette — Magnetic Tape; SMPTE 226M, Component Digital Video Recording — 19-mm Type D-1 Cassette — Tape Cas-

sette; SMPTE 227M, Component Digital Video Recording — 19-mm Type D-1 Cassette — Helical Data and Control Records; and SMPTE 228M, Component Digital Video Recording — 19-mm Type D-1 Cassette — Cue and Time and Control Code Records.

Proposed SMPTE Engineering Guidelines

Also published for a trial period are two Proposed SMPTE Engineering Guidelines on the 19-mm Type D-1 format: EG 10, Tape Transport Geometry Parameters for 19-mm Type D-1 Cassette for Component Digital Video Recording; and EG 11, Nomenclature for 19-mm Type D-1 Cassette for Component Digital Video Recording.

Copies of the proposals are available from Society Headquarters for \$3.00 each. Comments should be addressed to Barry C. Detwiler, Television Engineer, at Society Headquarters. The proposals will be submitted to the Executive Committee for Standards Approval if no adverse comments are received by May 1, 1986.

Approved International Standard

The International Organization for Standardization (ISO) approved an International Standard, the technical content of which is published here for your information. ISO 6038-1985, Cinematography — Splices for Use on 70-mm, 65-mm, 35-mm and 16-mm Motion-Picture Films — Dimensions and Locations, is in agreement with SMPTE Recommended Practice RP 111-1983, Dimensions for 70-mm, 65-mm and 35-mm Motion-Picture Film Splices. This material is reproduced with permission from the ISO and is copyrighted by the American National Standards Institute, 1430 Broadway, New York, NY 10018, from which copies are available.

— Alex E. Alden, Manager of Engineering

SMPTE Standards Subscription Service

The Society provides a Standards Subscription Service to assist firms, libraries, and individuals in establishing and maintaining a complete and current file of approved American National Standards, SMPTE Recommended Practices, and SMPTE Engineering Guidelines in the motion-picture, television, and video magnetic recording fields. Through this service, the Society makes automatic distribution to standards subscribers of all new and revised standards, recommended practices, and guidelines that are approved during the calendar year in these fields.

For further information, write to: Standards Subscription Service, Engineering Dept., Society of Motion Picture and Television Engineers, 595 West Hartsdale Ave., White Plains, NY 10607.

for component digital video recording —
19-mm type D-1 cassette —
tape record

SMPT E 224M

Page 2 of 5 pages

1. Scope

This standard specifies the dimensions and location of the audio, video, and ancillary data, analog audio cue track, time code, and control track records for 19-mm type D-1 helical-scan component digital cassette video tape recorders operating on the 525/60 television system encoded according to CCIR Recommendation 601.

2. Referenced Documents

This standard is intended for use in conjunction with the following documents:

- SMPT E 225M, Component Digital Video Recording — 19-mm Type D-1 Cassette — Magnetic Tape
- SMPT E 226M, Component Digital Video Recording — 19-mm Type D-1 Cassette — Tape Cassette
- SMPT E 227M, Component Digital Video Recording — 19-mm Type D-1 Cassette — Helical Data and Control Records
- SMPT E 228M, Component Digital Video Recording — 19-mm Type D-1 Cassette — Cue and Time and Control Code Records
- CCIR Recommendation 601, Encoding Parameters of Digital Television for Studios
- SMPT E G 10, Tape Transport Geometry Parameters for 19-mm Type D-1 Cassette for Component Digital Video Recording
- SMPT E G 11, Nomenclature for 19-mm Type D-1 Cassette for Component Digital Video Recording

3. General Specifications

- 3.1** Dimensions are in the metric system.
- 3.2** Tests and measurements made on the tape record to check the requirements of this standard shall be made under the following atmospheric conditions unless otherwise stated:

Temperature	20°C ± 1°C
Relative humidity	50% ± 2%
Barometric pressure	96 kPa ± 10 kPa
Tape Tension	0.8 N ± 0.05 N

3.3 Conditioning of the tape stock before recording and testing shall be as follows:

Storage conditioning	Not less than 24 hours
Environmental	Stabilized to the conditions specified in 3.2
Tape tension	Wound on a reel at a tension of 0.6 to 1.5 N.

3.4 The reference edge of the tape for dimensions specified in this standard shall be the lower edge as shown in Fig. 1. The magnetic coating, with the direction of tape travel as shown in Fig. 1, is on the side facing the observer.

3.4.1 All dimensions in the table and figures are to be measured from an equivalent reference edge. The tape reference edge is a line through three points on the edge of tape separated by 11.5 mm and constrained to lie in one straight line. This constraint may be a physical deformation.

4. Tape Speed

The tape speed shall be 286.588 mm/s ± 0.2%.

5. Record Location and Dimensions

- 5.1** Record location and dimensions shall be as specified in Figs. 1 and 2 and the table.
- 5.2** In recording, including editing, sector locations on each helical track shall be contained within the tolerance specified in the table and Fig. 1.

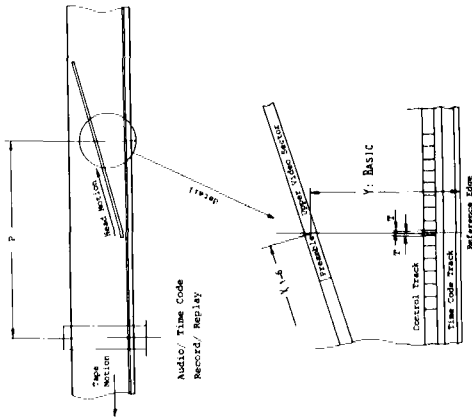


Fig. 2
Location of Audio/Time Code Heads and Control Track Record

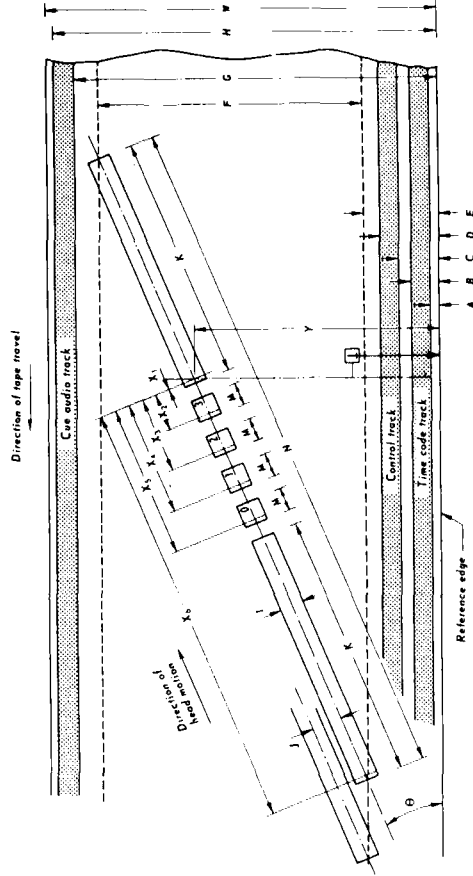


Fig. 1
Location and Dimensions of Recorded Tracks
(Tape Viewed from Oxide Side)

Note: X dimensions (X₁-X₄) are determined by the end of preamble location, as defined in SMPT E 227M.

Table
Record Location and Dimensions for 525/60 Standard

Dimensions	Nominal	Millimeters	Tolerance
A Time code track lower edge	0.2		± 0.1
B Time code track upper edge	0.7		± 0.1
C Control track lower edge	1.0		± 0.1
D Control track upper edge	1.5		± 0.05
E Program area lower edge	1.8		Derived
F Program area width	16/1.001		"
G Audio cue track lower edge	18.1		+ 0.15
H Audio cue track upper edge	18.8		± 0.2
I Helical track width	0.04		+ 0/-0.005
J Video sector length	77.71		Derived
K Audio sector length	2.55		"
N Helical track total length	170/1.001		"
P Audio/Time Code	210.4		± 0.3
R Recording tolerance	0	5.4005°	± 0.1
T Control track location	19.01		± 0.1
θ Track angle			basic
W Tape width	0		± 0.015
X ₁ Location of start of upper video sector	3.39		± 0.1
X ₂ Location of start of audio sector 3	6.79		± 0.1
X ₃ Location of start of audio sector 2	10.18		± 0.1
X ₄ Location of start of audio sector 1	13.58		± 0.1
X ₅ Location of start of audio sector 0	92.12		± 0.1
X ₆ Location of start of lower video sector	10.49		± 0.1
Y Program area reference			basic

Note: Above measurements shall be made under the conditions specified in 3.2.

6. Helical Track Record Curvature

- 6.1 The centerlines of any six consecutive tracks shall be contained within the pattern of the six tolerance zones established in Fig. 3.
- 6.2 Each zone is defined by two parallel lines which are inclined at an angle of arc-sine (16/170) basic with respect to the tape reference edge.
- 6.3 The centerlines of all zones shall be spaced 0.045 mm basic apart. The width of the first zone shall be 0.01 mm basic. The width of zones 2 through 6 shall be 0.015 mm basic. These zones are established to contain track angle errors, track straightness errors, and track pitch errors.

7. Relative Positions of Recorded Signals

- 7.1 Audio, video, and ancillary data, tracking control, time code, and audio cue track with information intended to be time coincident shall be positioned as shown in Figs. 1 and 2.
- 7.2 The spatial relationship between the control track record and helical tracks are specified in Figs. 1 and 2.
- 7.3 The program area reference point is defined as a point corresponding to the end of the preamble in the upper video sector. This point is determined by a line parallel to the reference

SMPTE 224M

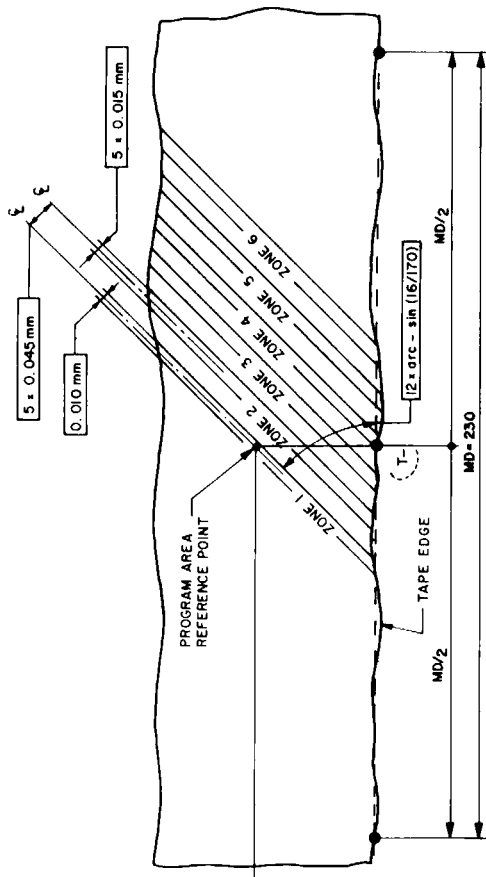


Fig. 3

Location and Dimensions of Tolerance Zones of Helical Track Record

Note: The centerline of any 6 consecutive tracks shall be contained within each zone given.

8. Gap Azimuth

- 8.1 The azimuth angle of the cue audio, control track, and time code head gaps used to produce longitudinal track records shall be perpendicular to the track record.
- 8.2 The azimuth angle of the head gaps used for the helical track recording shall be perpendicular to the helical track record within a tolerance of = 10 minutes.

edge of the tape 10.49 mm apart given as Y in the table, intersecting the track centerline as shown in Figs. 1 and 2. The relationship between sectors and contents of each sector is specified by SMPTE 227M.

7.4 The distance between the location of the control track head and the control track record corresponding to the program area reference point shall not exceed 210.7 mm.

SMPTE 224M

Appendix

(The Appendix is not part of this American National Standard, but is included for information only.)

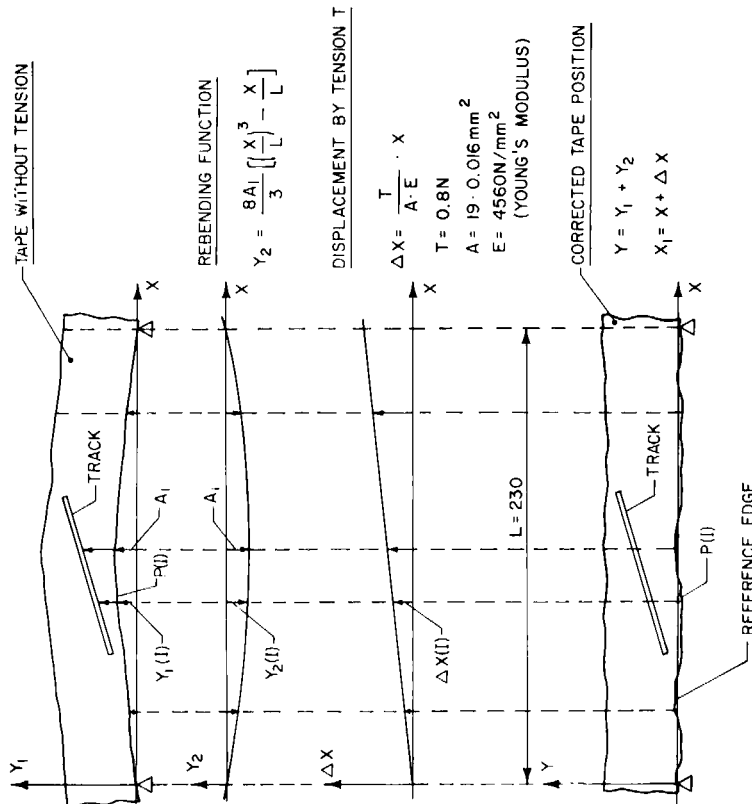


Fig. 4
Mathematically Processed Measured Tape Data

To obtain the reference edge and the position of the track, the coordinates of all measured points P_{11} , are to be corrected as follows:

Y — Direction by the function $Y_2 = \frac{8 \cdot A_1}{3} \left[\left(\frac{X^3}{L} \right) - \frac{X}{L} \right]$

X — Direction by the function $\Delta X = \frac{T}{A \cdot E} \cdot X$

Proposed American National Standard
for component digital video recording —
**19-mm type D-1 cassette —
magnetic tape**

SMPTE 225M

Page 1 of 2 pages

1. Scope

This standard specifies the principal properties of the magnetic tape used for the 19-mm type D-1 component digital video format.

shall be made under the following atmospheric conditions unless otherwise stated:

- Temperature 20°C ± 1°C
- Relative humidity 50% ± 2%
- Barometric pressure 96 kPa ± 10 kPa

2. Referenced Documents

This standard is intended for use in conjunction with the following documents:

- SMPTE 224M, Component Digital Video Recording — 19-mm Type D-1 Cassette — Tape Record
- SMPTE 226M, Component Digital Video Recording — 19-mm Type D-1 Cassette — Tape Cassette
- SMPTE 227M, Component Digital Video Recording — 19-mm Type D-1 Cassette — Helical Data and Control Records
- SMPTE 228M, Component Digital Video Recording — 19-mm Type D-1 Cassette — Cue and Time and Control Code Records

- Storage conditioning Not less than 24 hours
- Environmental Stabilized to the conditions specified in 3.2.
- Tape tension Wound on a reel at a tension of 0.6 to 1.5N.

4. Video Tape Specification

- 4.1 Base.** The base material shall be polyester or equivalent.
- 4.2 Width.** The tape width shall be 19.010 ± 0.015 mm.

4.2.1 The tape, covered with a glass plate, shall be measured without tension at a minimum of five different positions along the tape using a calibrated microscope or profile projector having an accuracy of at least 2.5 μm. Tape width is defined as the average of the five readings.

4.3 Delta Width. Delta width (width fluctuation) shall not exceed 6 μm p-p.

4.3.1 Measurement of delta width shall be over a tape length of 230 mm with a tension of 0.8 N.

4.4 Reference Edge Straightness. The reference edge straightness maximum deviation is 6 μm p-p.

3. Measurement Environment

- 3.1** Dimensions are in the metric system.
- 3.2** Tests and measurements made on magnetic tape to check the requirements of this standard

4.4.1 Edge straightness fluctuation is measured at the edge of a moving tape guided by three guides having contact to the same edge and having a distance of 115 mm from the first to second guide and 115 mm from the second to third guide. Edge measurements are averaged over 10-mm lengths and are made at the midpoint between the first and second guide.

4.5 Tape Thickness. Use of tapes with various thicknesses is permitted within the following values:

Nominal 16- μ m tape shall have a thickness between 13.5 and 16 μ m.

Nominal 13- μ m tape shall have a thickness between 11 and 13 μ m.

4.6 Transmissivity. Transmissivity shall be less than 5%, measured over the range of wavelengths 700 to 900 nm.

4.7 Offset Yield Strength. Offset yield strength shall be greater than 15 N.

4.7.1 The force to produce 1% tangential elongation of a 200-mm test sample with a pull rate of 100-mm per minute shall be used to confirm the offset yield strength.

4.7.2 The initial tangential slope is extended and read at 1% elongation.

4.8 Magnetic Coating. The magnetic tape used should have a coating of improved metal oxide or equivalent.

4.8.1 The coating coercivity shall be a class 850 oersted (68,000 A/m), as measured by a 50- or 60-HZ BH meter.

4.8.2 The oxide particles shall be longitudinally oriented.

Proposed American National Standard

for component digital video recording —
19-mm type D-1 cassette —
tape cassette

SMPTE 226M

Page 1 of 25 pages

1. Scope

This standard specifies dimensions for three sizes of cassettes for use with 19-mm type D-1 digital video recording.

2. Referenced Documents

This standard is intended for use in conjunction with the following documents:

SMPTE 224M, Component Digital Video Recording — 19-mm Type D-1 Cassette — Tape Record

SMPTE 225M, Component Digital Video Recording — 19-mm Type D-1 Cassette — Magnetic Tape

SMPTE 227M, Component Digital Video Recording — 19-mm Type D-1 Cassette — Helical Data and Control Records

SMPTE 228M, Component Digital Video Recording — 19-mm Type D-1 Cassette — Cue and Time and Control Code Records

SMPTE EG 10, Tape Transport Geometry Parameters for 19-mm Type D-1 Cassette for Component Digital Video Recording

SMPTE EG 11, Nomenclature for 19-mm Type D-1 Cassette for Component Digital Video Recording

3.2 Dimensions shall be as specified in the figures and tables.

3.3 General tolerances for dimensions, except those for which tolerances are otherwise specified, shall be as follows:

Over	To	mm
0	4	± 0.2
4	16	± 0.3
16	63	± 0.4
63	250	± 0.5
250		± 0.7

4. General Specifications

4.1 The three sizes of cassettes shall be identified as:

Small	D-1.S
Medium	D-1.M
Large	D-1.L

4.2 Minimum tape lengths (and nominal play times) for a fully loaded cassette shall be as follows:

Cassette	16 μ m	13 μ m
S	11 min / 190 m	13 min / 225 m
M	34 min / 587 m	41 min / 708 m
L	76 min / 1311 m	94 min / 1622 m

3. Measurements

3.1 Tests and measurements on cassette parameters shall be made under the following atmospheric conditions:

Temperature	20°C \pm 1°C
Relative humidity	50% \pm 2%
Stabilization time	24 hours

4.3 The magnetic coating on the tape shall face out of the cassette as specified in Figs. 1 to 3.

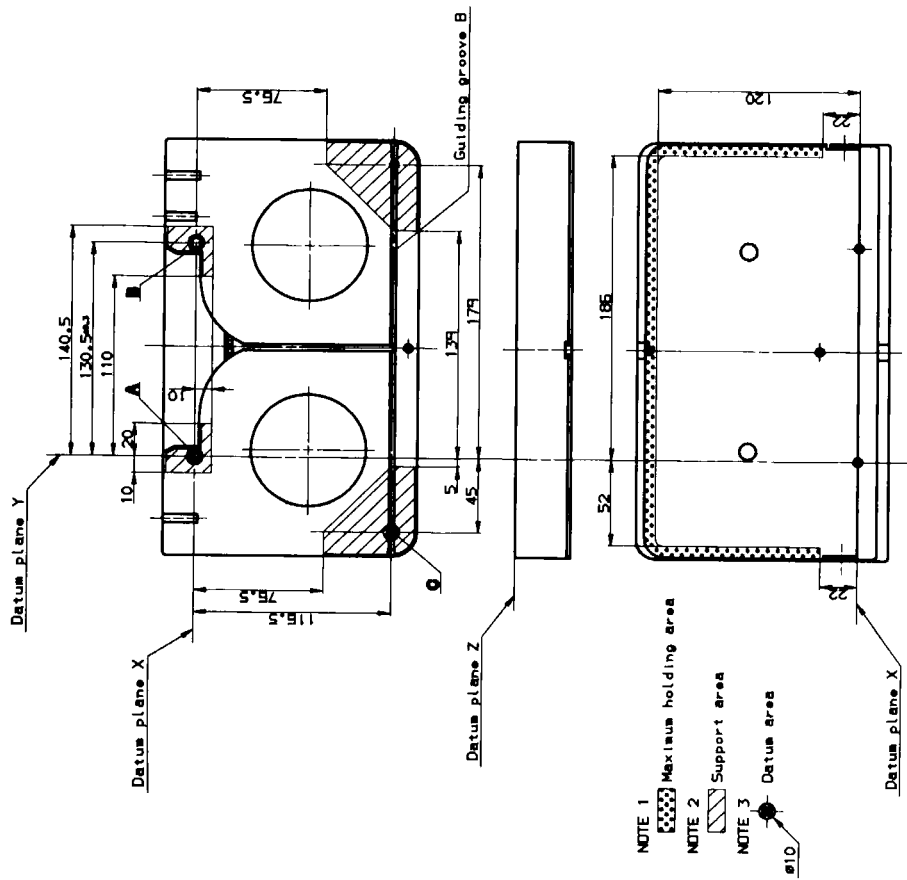


Fig. 5 Datum Area, Support Area and Holding Area of D-1.M Cassette

- Notes:
1. The cassette shall be secured by the recorder and/or player unit on the dotted area.
 2. The periphery within 1.0 mm from the edge of guiding groove B and from the edge of the cassette shall be removed from the support area. The cassette shall be supported by the recorder and/or player unit on the hatched area.
 3. Datum plane Z shall be determined by datum areas A, B, and C.

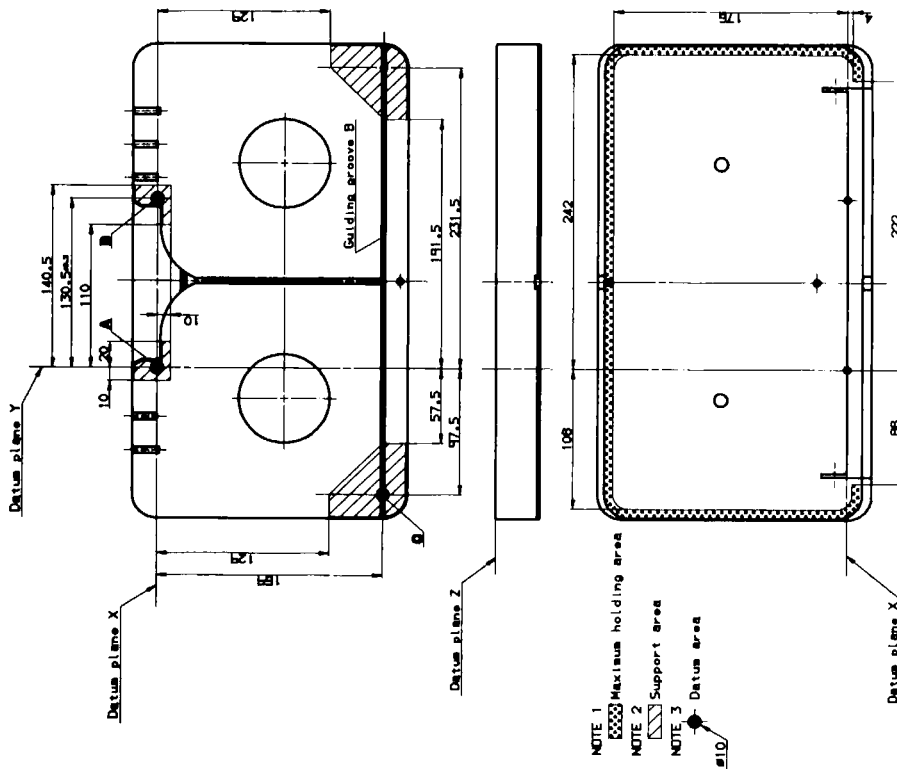


Fig. 6 Datum Area, Support Area and Holding Area of D-1.L Cassette

- Notes:
1. The cassette shall be secured by the recorder and/or player unit on the dotted area.
 2. The periphery within 1.0 mm from the edge of guiding groove B and from the edge of the cassette shall be removed from the support area. The cassette shall be supported by the recorder and/or player unit on the hatched area.
 3. Datum plane Z shall be determined by datum areas A, B, and C.

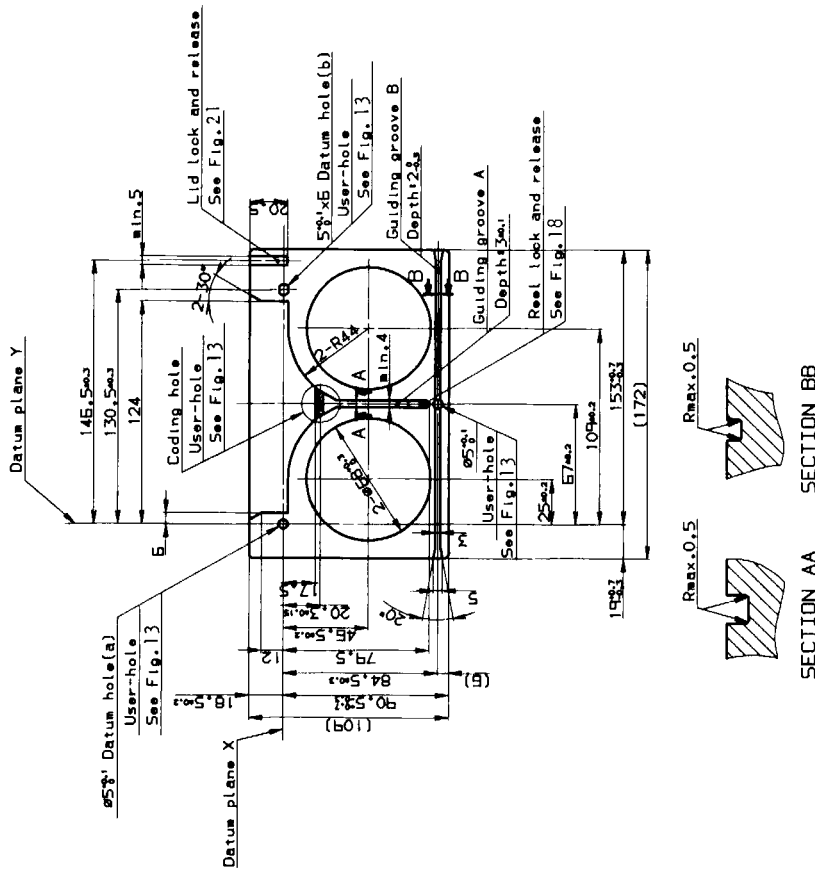


Fig. 7
Bottom View of D-1.S Cassette



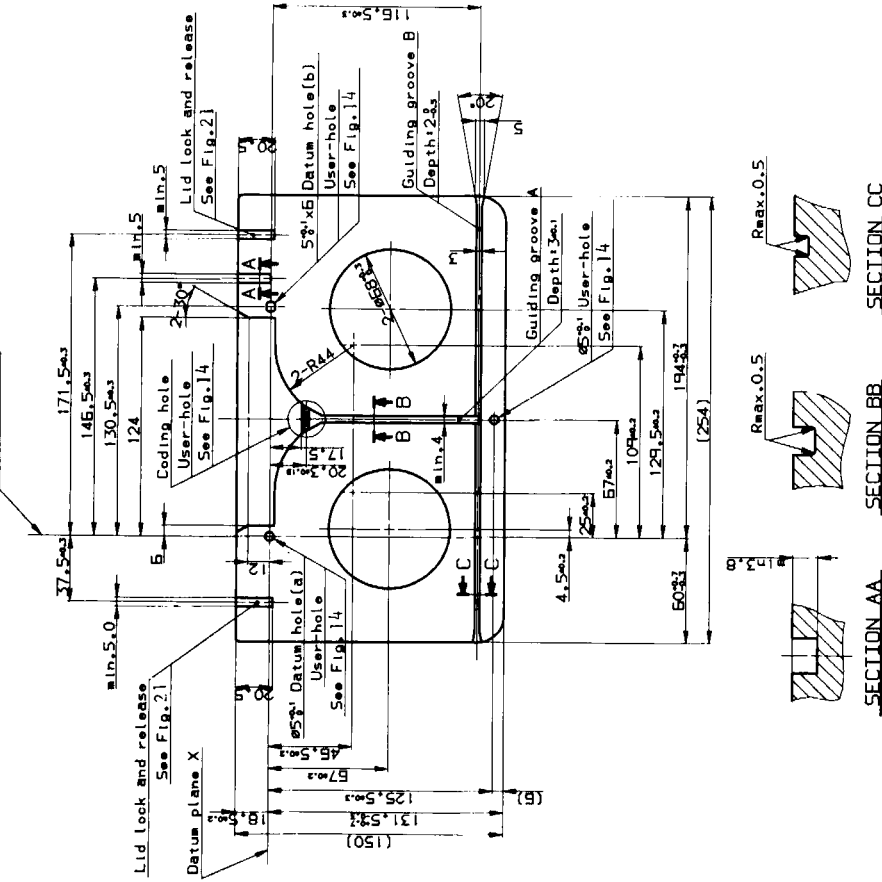


Fig. 8
Bottom View of D-1.M Cassette

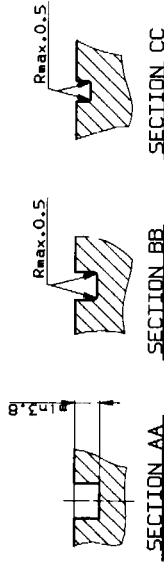

7. Identification Holes

Holes 1 and 2 shall be used in combination to indicate tape thickness according to the following logic table:

Hole number:	1	2	
	0	0	≡ 16 μm tape
	0	1	≡ 13 μm tape
	1	0	≡ Undefined/reserved
	1	1	≡ Undefined/reserved

7.1 There shall be two sets of identification holes; one for the use of the manufacturer, and the other for the user.

7.1.1 Manufacturers' coding holes, detailed in Figs. 13 to 15, shall be defined as follows:

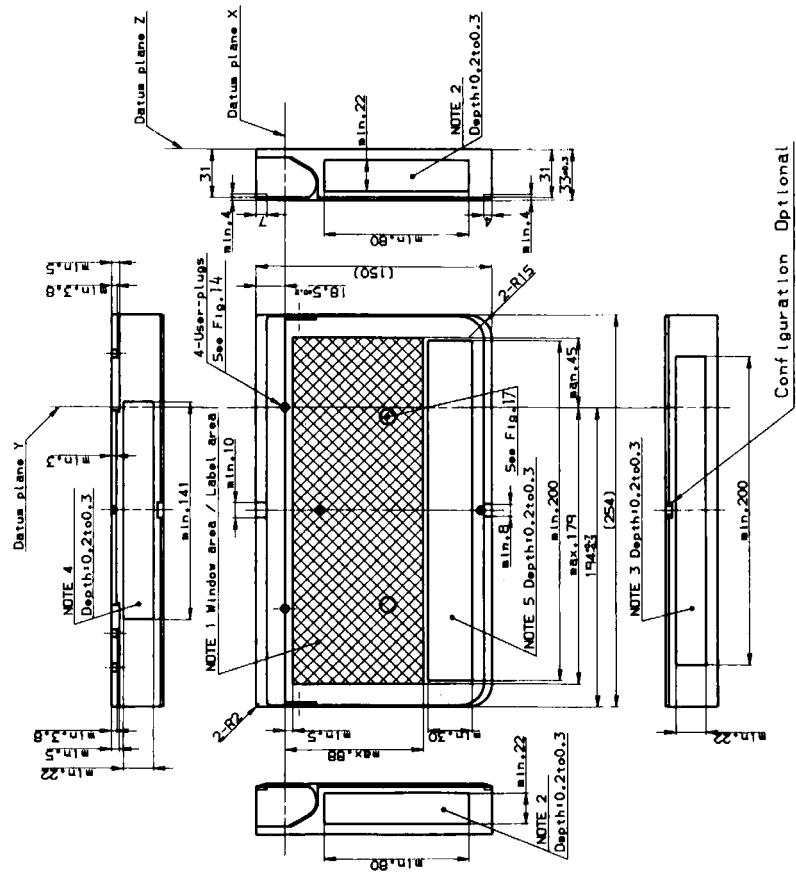


Fig. 11
Top and Side View of D-1.M Cassette

- Notes:
1. The crosshatched area is available for the window/labels.
 2. Side label may be attached to this recessed area.
 3. Rear label may be attached to this recessed area.
 4. Lid label may be attached to this recessed area.
 5. Top label may be attached to this recessed area.

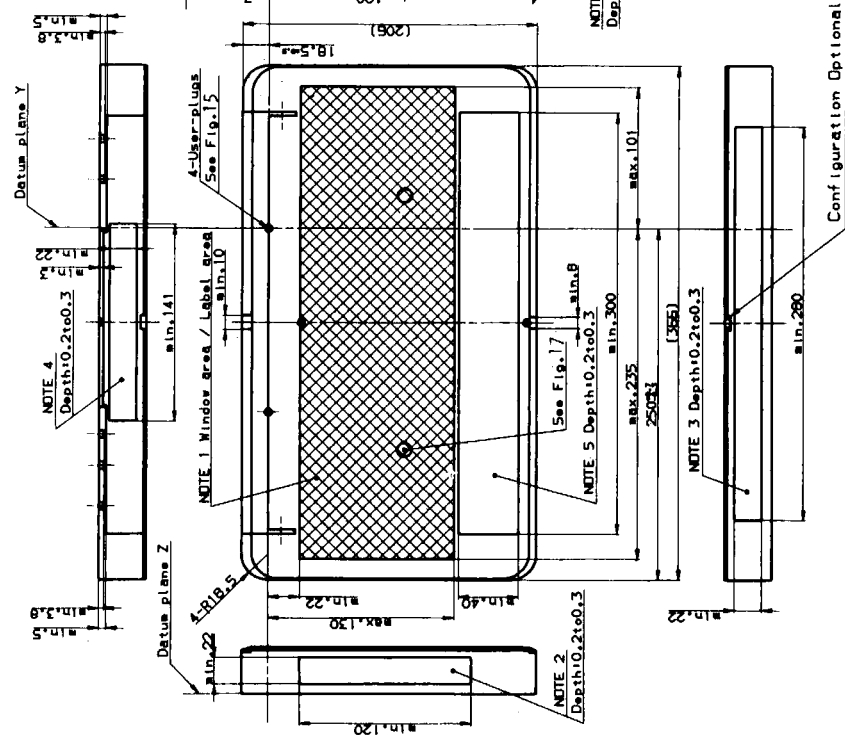


Fig. 12
Top and Side View of D-1.1 Cassette

- Notes:
1. The crosshatched area is available for windows/labels.
 2. Side label may be attached to this recessed area.
 3. Rear label may be attached to this recessed area.
 4. Lid label may be attached to this recessed area.
 5. Top label may be attached to this recessed area.

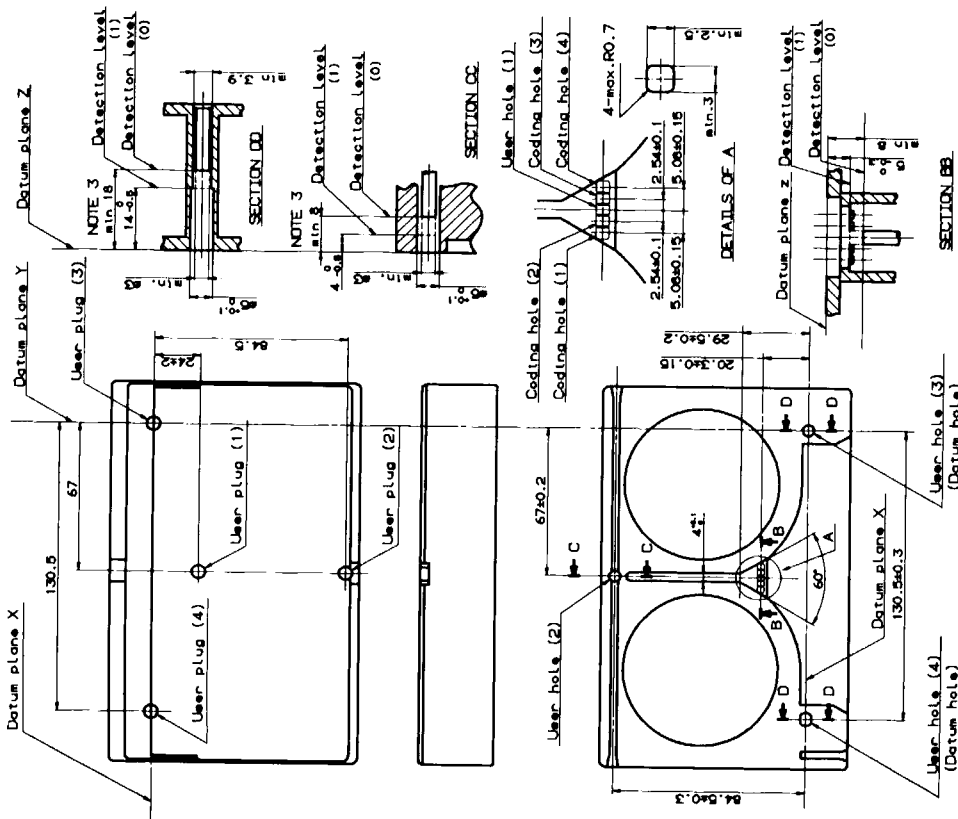


Fig. 13

D-1.S Cassette Coding Holes and User Holes

Notes:

1. The cassette shall be provided with four coding holes (1) to (4) and four user holes (1) to (4). When any plug is removed, the opening shall be as shown in detail A. The user plug (1) shall be green.
2. User holes (3) and (4) on the upper shell shall be opened when user plugs are removed.
3. All cassettes shall be provided with holes as defined by section DD and CC.

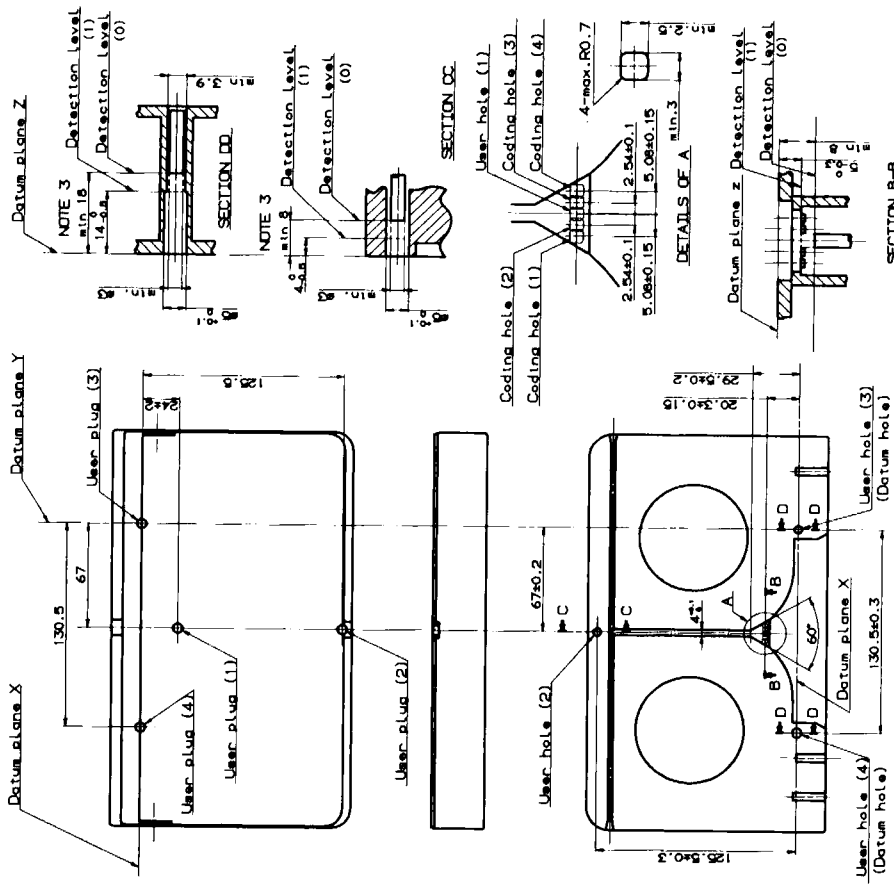


Fig. 14

D-1.M Cassette Coding Holes and User Holes

Notes:

1. The cassette shall be provided with four coding holes (1) to (4) and four user holes (1) to (4). When any plug is removed, the opening shall be as shown in detail A. The user plug (1) shall be green.
2. User holes (3) and (4) on the upper shell shall be opened when user plugs are removed.
3. All cassettes shall be provided with holes as defined by section DD and CC.

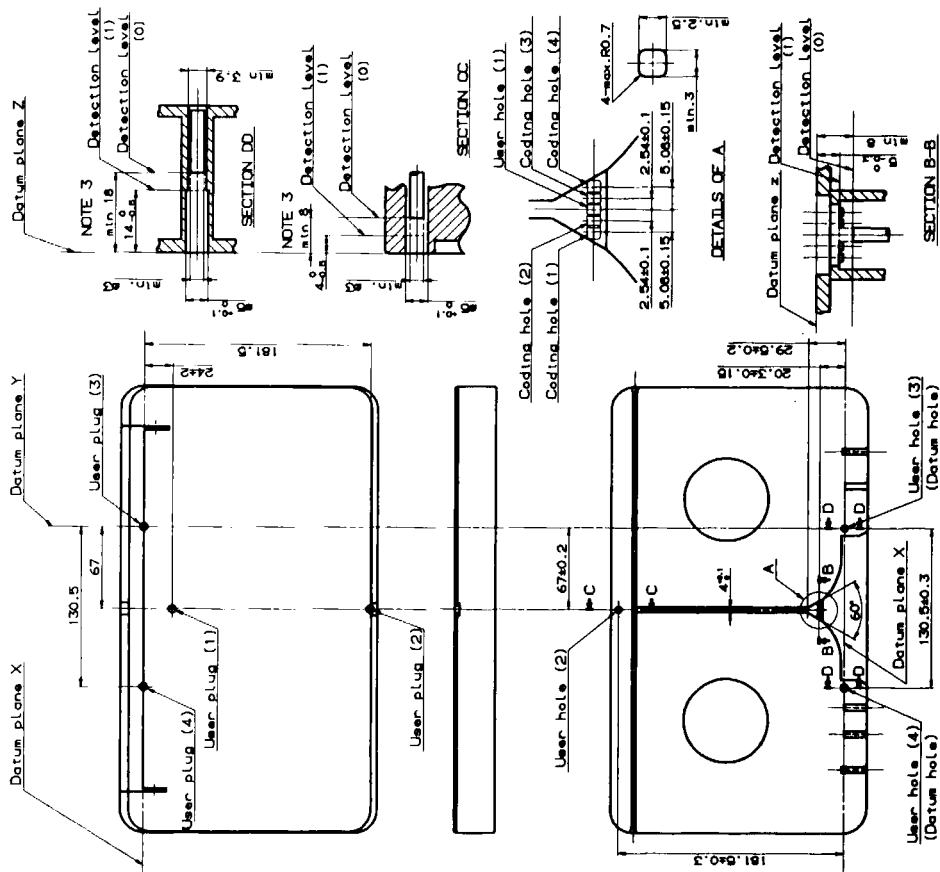


Fig. 15
D-1.1 Cassette Coding Holes and User Holes

- Notes:
1. The cassette shall be provided with four coding holes (1) to (4) and four user holes (1) to (4).
 2. User holes (3) and (4) on the upper shell shall be opened when user plugs are removed.
 3. All cassettes shall be provided with holes as defined by section DD and CC.

7.1.2 Holes 3 and 4 shall be used to indicate the coercivity of the magnetic recording tape.

Hole number: 3 4

0 0	≡ Class 850
0 1	≡ Undefined/reserved
1 0	≡ Undefined/reserved
1 1	≡ Undefined/reserved

7.1.3 A "0" in the above tables indicates that the indicator tab is removed or open, an undetected state by the recorder/player sensor mechanism.

7.2 The dimensions and location of the users' holes specified in Figs. 13 to 15 shall be defined as follows:

7.2.1 When a "0" state exists, the user holes shall identify the following conditions:

1. Total record lock out (audio/video/cue/time code/control track)
2. Reserved and undefined
3. Reserved and undefined
4. Reserved and undefined

7.2.3 The user plug mechanism shall withstand an axial force of 0.5 N.

8. Leader/Trailer Tape

8.1 The cassette shall include leader and trailer tape. When attached to the hub, there shall be a length of 240 mm ± 30 mm between the splice point and the outside of the cassette shell.

8.2 The leader/trailer tape material shall be polyester or equivalent having a transmissivity

of at least 60% when measured with a 700 — 900 nm light source.

8.3 When attached to the hub, the leader/trailer tape shall not separate when subjected to a force of 22 N or less.

8.4 The width of the leader/trailer tape shall be 19 mm ± 0.025 mm.

8.5 The thickness of the leader/trailer tape shall be 20 μm ± 10 μm.

9. Reels

9.1 The dimensions of the reels and the relationship between the reels and reel tables are specified in Figs. 16 and 17.


9.2 The reels shall be locked automatically when the cassette is removed from the recorder/player.

9.3 When a D-1.S cassette is inserted into a recorder/player, the reels shall be unlocked automatically as specified in Fig. 18.

9.3.1 The force needed to release the reel lock of the D-1.S cassette shall be 0.5 N ± 0.1 N.

9.4 When a D-1.M or D-1.L cassette is inserted into a recorder/player, the reels shall be unlocked automatically by opening the lid as specified in Figs. 19 and 20.

9.5 The reels shall be held in position by a reel spring with a force as shown in Table 1, when the height of the reel table support is 2.0 + 0.2 mm from datum plane Z.

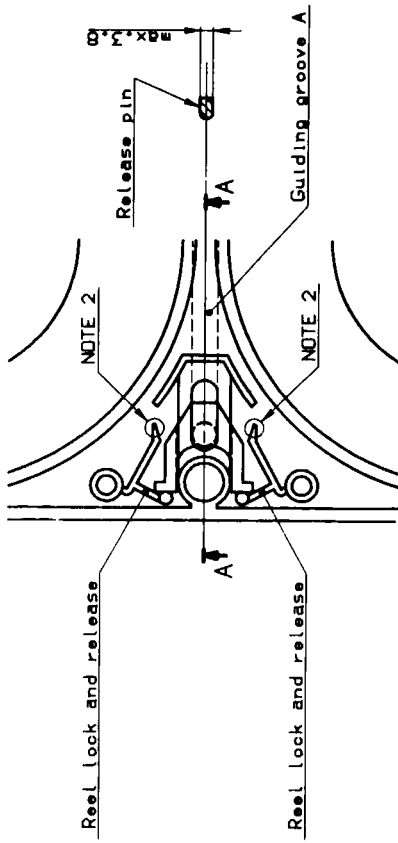

SECTION A-A

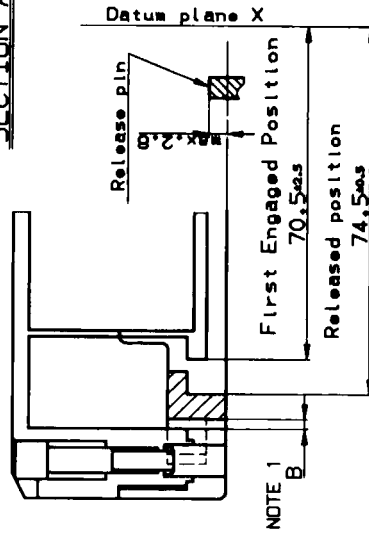


Fig. 18

D-1.5 Cassette Reel Lock and Release

Notes:

1. Clearance B shall be 0.5 mm at a minimum when the release pin is located 75 mm away from datum plane X.
2. The end of the reel lock shall be outside the reel area 84 mm min in diameter, when the release pin is located 74 mm away from datum plane X.


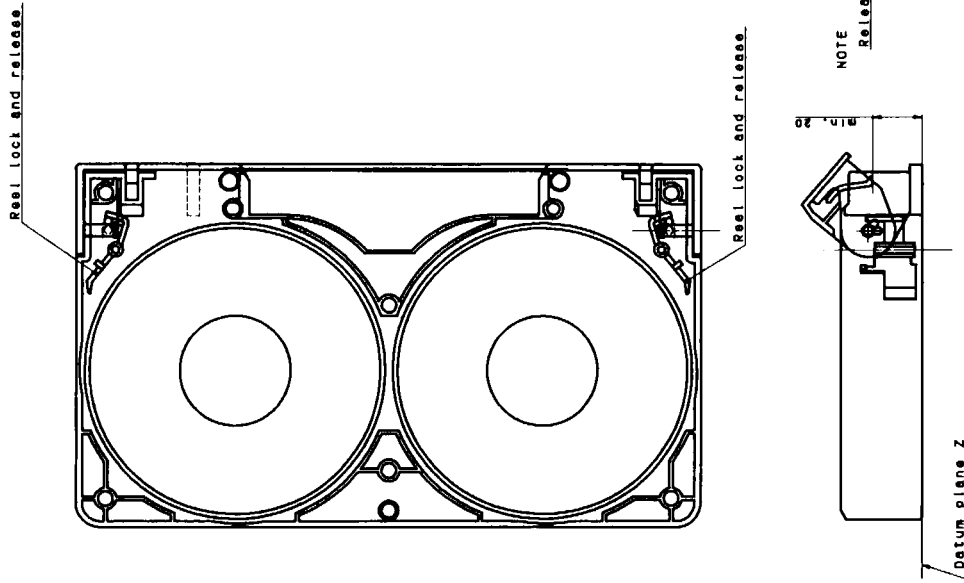


Fig. 19

D-1.M Cassette Reel Lock and Release

Note: The end of the reel lock shall be outside the reel area 125 mm min in diameter, when the lid is opened 20 mm above datum plane Z.

Reel lock and release

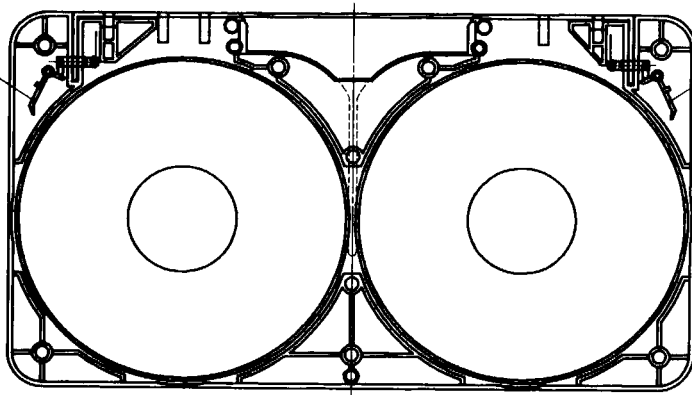

Reel lock and release

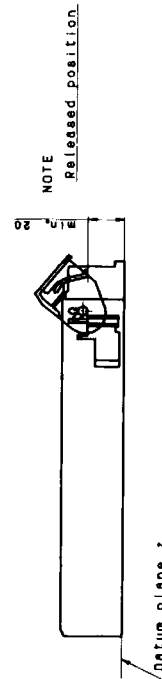


Fig. 20
D-1.1 Cassette Reel Lock and Release

Note: The end of the reel lock shall be outside the reel area 181 mm min in diameter, when the lid is opened 20 mm above datum plane Z.

Table 1
Reel Spring Force

Cassette Size	Force
D-1.S	3 N
D-1.M	8 N
D-1.L	8 N

10. Lid

10.1 The lid shall be unlocked and opened by the recorder/player when the cassette is inserted.

10.1.1 The lid shall be unlocked by a 0.5 N \pm 0.1 N force being exerted upon the release pin, as specified in Figs. 21 and 22.

10.1.2 The inner door shall be lifted by the recorder/player to the position shown in Fig. 23.

10.2 The outer door when open shall not exceed 51 mm with respect to datum plane Z, as specified in Fig. 23.

10.3 When the cassette is removed from the recorder/player, the lid shall lock automatically.

10.4 The maximum force to open the lid shall be 1.5 N.

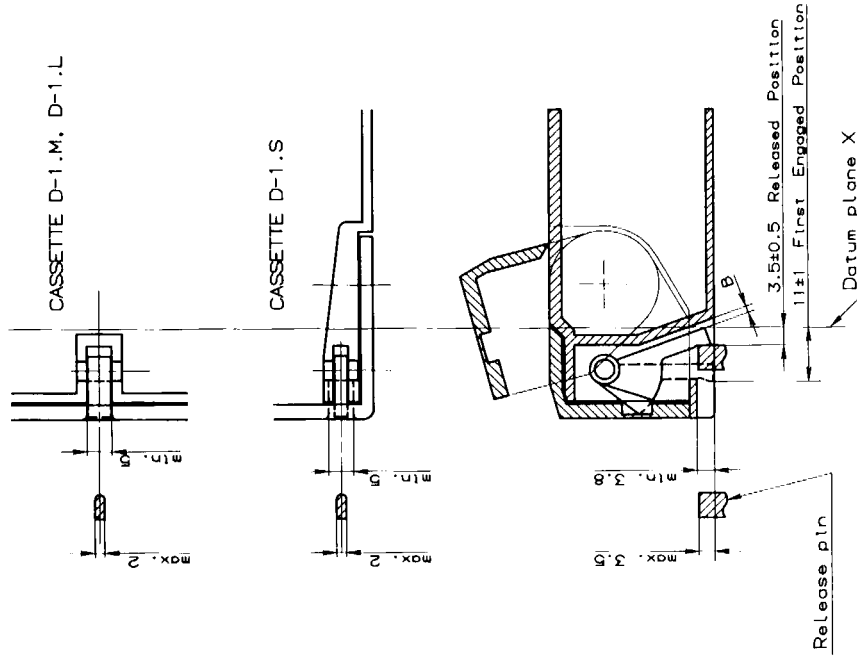


Fig. 21
Lid Lock and Release

- Notes:
1. Clearance B shall be 0.5 mm at a minimum when the release pin is located 3 mm away from datum plane X.
 2. The lid lock shall be released when the release pin is located 4 mm away from datum plane X.

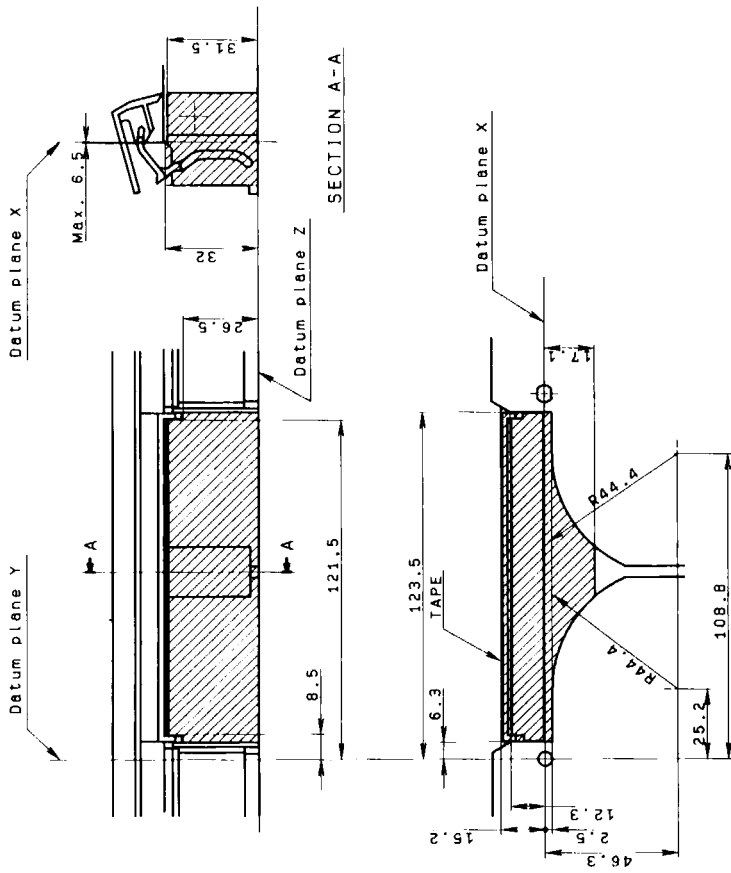


Fig. 22
Minimum Space for VTR Loading Mechanism

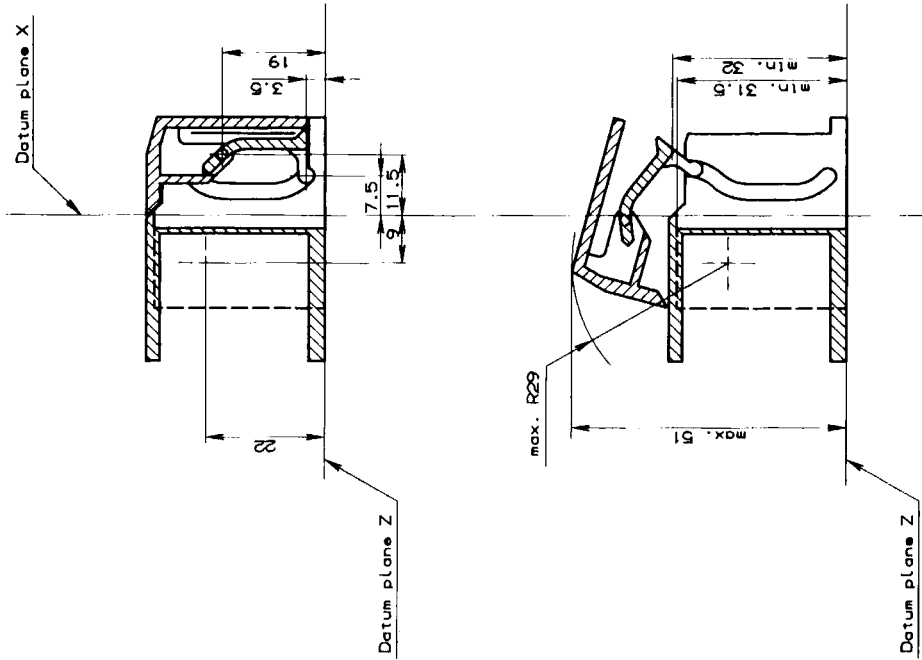


Fig. 23
Lid Structure

Note: Lid shall open to a height of at least 32 mm.

Proposed American National Standard
for component digital video recording —
19-mm type D-1 cassette —
helical data and control records

SMPTE 227M

Page 1 of 40 pages

1. Scope

This standard specifies the content, format, and recording method of the data blocks forming the helical records on the tape containing video, audio, and associated data in the 19-mm type D-1 helical-scan cassette video recorder. In addition, section 6 of this document specifies the content, format, and recording method of the longitudinal record containing tracking information for the scanning head associated with the helical records. Track dimensions and locations are specified in SMPTE 224M.

The standard applies to recorders operating in the 525-line television system with a frame frequency of 29.97 Hz nominal and in accord with CCIR Recommendation 601. One video channel and four independent audio channels are recorded. Audio channels operate in accord with ANSI S4.40-1985 at a 48 kHz sampling frequency.

Fig. 1 shows a block diagram of the processes involved in the recorder.

2. Referenced Documents

This standard is intended for use in conjunction with the following documents:

- ANSI S4.40-1985, Recommended Practice for Digital Audio Engineering — Serial Transmission Format for Linearly Represented Digital Audio Data

- SMPTE 224M, Component Digital Video Recording — 19-mm Type D-1 Cassette — Tape Record
- SMPTE 225M, Component Digital Video Recording — 19-mm Type D-1 Cassette — Magnetic Tape
- SMPTE 226M, Component Digital Video Recording — 19-mm Type D-1 Cassette — Tape Cassette
- SMPTE 228M, Component Digital Video Recording — 19-mm Type D-1 Cassette — Cue and Time and Control Code Records
- CCIR Recommendation 601, Encoding Parameters of Digital Television for Studios
- CCIR Report AG/11, The Filtering, Sampling and Multiplexing of Colour Component Signals for Systems Using Digital Modulation
- SMPTE EG 10, Tape Transport Geometry Parameters for 19-mm Type D-1 Cassette for Component Digital Video Recording
- SMPTE EG 11, Nomenclature for 19-mm Type D-1 Cassette for Component Digital Video Recording
- SMPTE RP 125-1984, Bit-Parallel Digital Interface for Component Video Signals

Page 2 of 40 pages

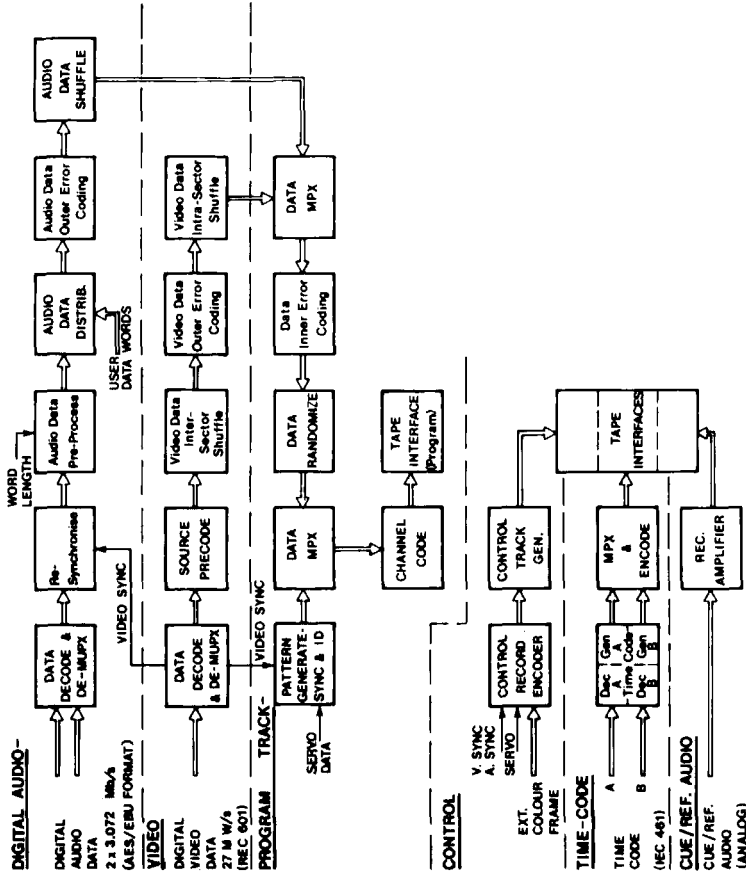


Fig. 1
Digital Recorder-Record Path Processing

3. Helical Record Content, Format, Synchronization, and Recording Method

3.1 Introduction. The helical track defined mechanically in SMPTE 224M is recorded with the digital data from the video channel and the four audio channels. Data is arranged in six sectors per track as shown in Fig. 2. Two sectors are employed for video data and four sectors each containing data from one of the four audio channels. Details of sector assignment are shown in sections 4 and 5 of this document. Each sector is divided into the following elements:

- Preamble containing a clock run-up sequence, sync pattern, and identification pattern.
 - Sync blocks containing sync pattern and an identification pattern followed by a fixed length data block with error control.
 - Postamble containing channel sync pattern and an identification pattern.
- Details of the elements are shown in Fig. 3. The space between sectors may be unrecorded or filled with the clock run-up sequence (CC). This space is used to accommodate sector timing errors and to allow editing.

SMPTE 227M

THIS PROPOSAL IS PUBLISHED FOR COMMENT ONLY

A portion of the guard-space at the beginning of the track may contain run-up sequence data pattern (CC)₁₁ of a length up to 100 bytes.


3.2 Labelling Convention for Audio and Video Data

3.2.1 Least significant bit is written on left and is the first recorded to tape.

3.2.2 The lowest numbered byte is shown at left/top and is the first encountered in the input data stream.

3.2.3 Byte values are expressed in hexadecimal notation unless otherwise noted.

3.2.4 Control words derived from audio source data do not follow this convention, having the most significant bit in the leftmost/first position. They are passed transparently through the recorder.

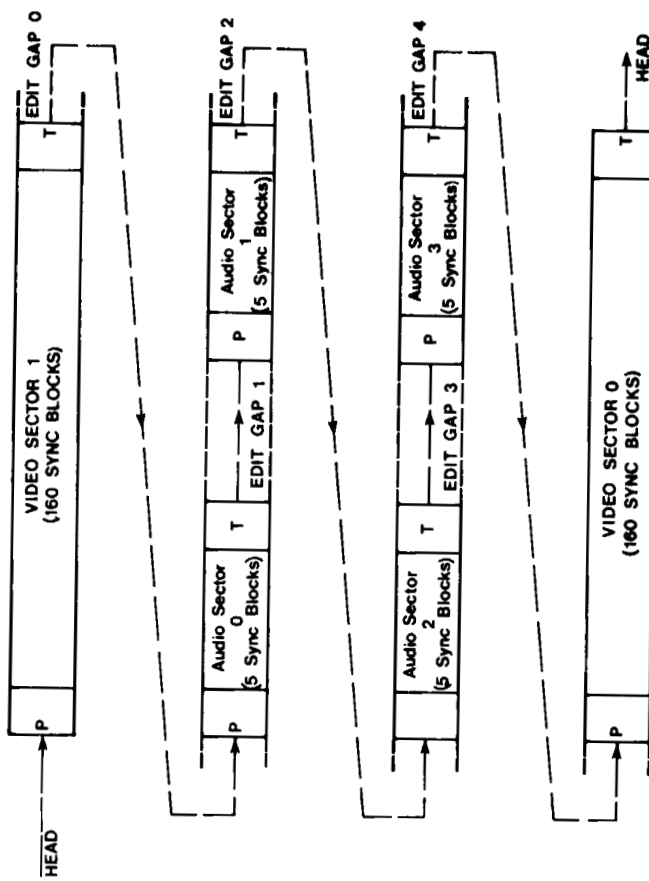

P = PRE-AMBLE (30 BYTES)
 T = POST-AMBLE (6 BYTES)
 SYNC BLOCK (134 BYTES)

Fig. 2
 Sector Arrangement on Helical Track

Table 1
 Helical Track Sector Length

Sector Name	Length mm	S. blocks	Size Bytes
V1	77.71	160	21476
A0	2.55	5	706
A1	2.55	5	706
A2	2.55	5	706
A3	2.55	5	706
V0	77.71	160	21476
Edit gap 0-4	5 x 0.84	—	5 x 232
Total	169.83	—	46936

See Note

Note: 169.83 is derived from specified value 170.0 mm.

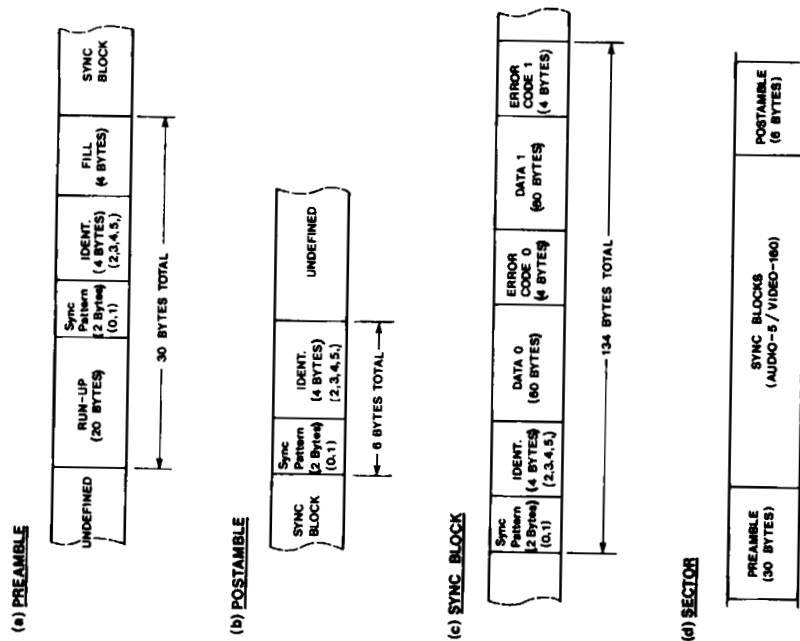


Fig. 3
 Sector Components

Table 2
4- to 8-Bit Mapping

INPUT	OUTPUT	INPUT	OUTPUT
0	1B	8	96
1	2E	9	A3
2	35	A	B8
3	47	B	CA
4	5C	C	D1
5	69	D	E4
6	72	E	
7	8D	F	Illegal

Values expressed in hexadecimal.

The values of the sync block ID are shown in Fig. 4.

3.3.3.1 Identification Pattern — Byte 2

Mapped from Word 0 (4 bits) where Word 0 is the right-hand character identified in Fig. 4. See Table 2 and Fig. 5.

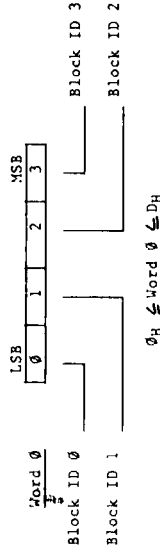


Fig. 5
Identification Pattern — Byte 2

3.3.3.2 Identification Pattern — Byte 3

Mapped from Word 1 (4 bits) where Word 1 is the left hand character identified in Fig. 4. See Table 2 and Fig. 6.

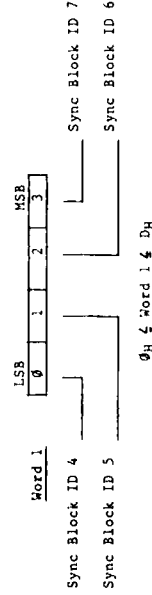


Fig. 6
Identification Pattern — Byte 3

3.3.3 Identification Pattern:

- (a) Length — 32 bits (4 bytes)
- (b) Arrangement — Byte 2 — Sync Block ID — See Fig. 4
- Byte 3 — Sync Block ID — See Fig. 4
- Byte 4 — Segment ID — See Figs. 4 and 9
- Byte 5 — Sector ID — See Figs. 4 and 9
- (c) Protection — 4 to 8 Mapping as in Table 2
- (d) Randomization — None

3.3 Sector Details

3.3.1 Sync Block. Details of the sync block are shown in Fig. 3(c). All sync blocks consist of 134 bytes consisting of sync pattern (2 bytes) and identification pattern (4 bytes including error coding) followed by 128 data bytes.

3.3.2 Sync Pattern:

- (a) Length — 16 bits (2 bytes)
- (b) Pattern — 30F5 (in hexadecimal notation)
- LSB MSB
0 0 0 0 1 1 0 0
- Byte 1
- LSB MSB
1 0 1 0 1 1 1 1
- Byte 2
- (c) Protection — None
- (d) Randomization — None

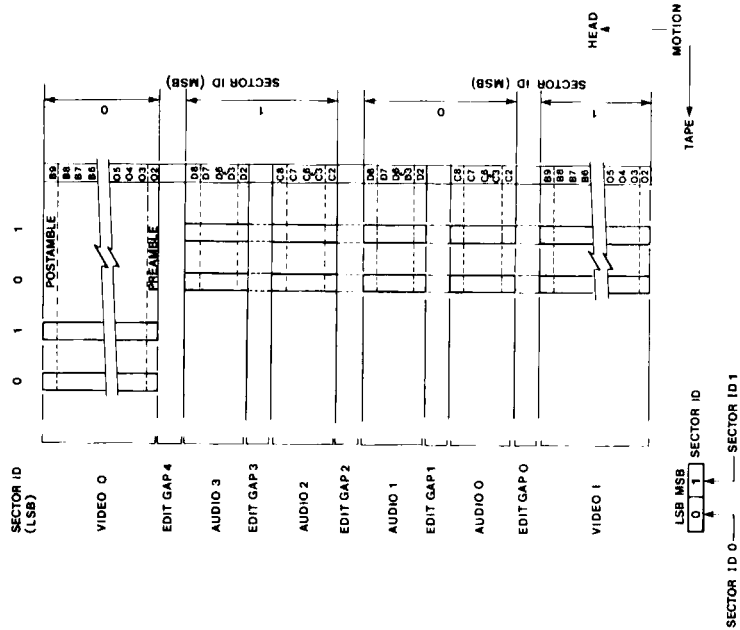


Fig. 4
Values of Sync Block Identification and Sector Identification Codes

3.3.3.3 Identification Pattern — Byte 4
Mapped from Word 2 (4 bits) by Table 2. See Fig. 7.

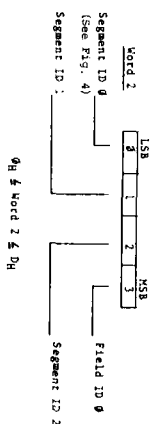


Fig. 7
Identification Pattern — Byte 4

3.3.3.4 Identification Pattern — Byte 5
Mapped from Word 3 (4 bits) by Table 2. See Fig. 8.




Fig. 8
Identification Pattern — Byte 5

Sync block ID is an eight-bit word formed from two 4-bit words, each lying in the range 0 — 4, uniquely identifying each sync block within one sector. Fig. 4 specifies these values.
Field ID lies in the range 0 — 3 with the origin aligned with the field sequence identification pulse doublet mark (see Section 6). The values of Field ID are shown in Fig. 9. These values must be continuous, even after editing operations.
Sector ID lies in the range 0 — 4 as shown in Fig. 9.

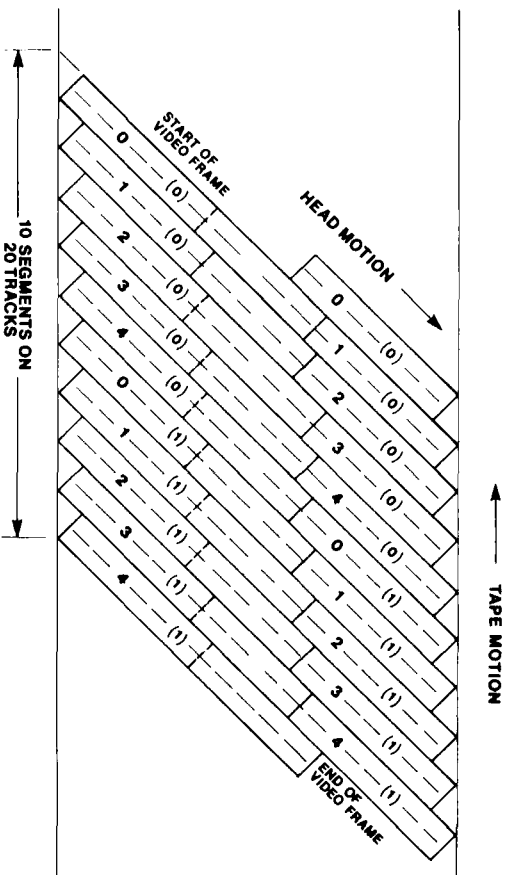


Fig. 9
Segment and Field Numbers

- Notes:
1. Segment numbers lie in the range 0 — 4 (unbracketed).
 2. Field numbers lie in the range 0 — 3 (bracketed).
 3. Fields 0 — 1 shown; Fields 2 — 3 are similar.

3.3.4 Data Field — Sync Block. This block construction is used for all audio and video data and the associated error correction data.

- (a) Length — 2 inner code blocks; each of 60 data bytes plus 4 inner error-code check bytes. (Outer error-code check bytes are considered as data.) — See Fig. 3(c).
- (b) Arrangement — See Fig. 3(c).
- (c) Protection (Inner Code)
 - Reed-Solomon
 - GF(256)

- Field Generator Polynomial — $x^4 + x^4 + x^2 + x^0$ (x are place keeping variables in GF(2), the binary field).
- Order of use — Left-most term is most significant, "oldest" in time computationally, and first written to tape.

- Code Generator Polynomial (in GF(256)) — $G(x) = (x + \alpha^0)(x + \alpha^1)(x + \alpha^2)(x + \alpha^3)$ (α^i is given by 02ⁱⁱ in GF(256))

- Check Characters — K_0, K_1, K_2, K_3, K_4 in $K_3x^3 + K_2x^2 + K_1x^1 + K_0x^0$ obtained as the remainder after dividing $x^4 D(x)$ by $G(x)$ where $D(x) = B_{59}x^{59} + B_{58}x^{58} + \dots + B_1x^1 + B_0x^0$

Equation of Full Code — $B_{39}x^{63} + B_{38}x^{62} + \dots + B_0x^4 + K_3x^3 + \dots + K_0x^0$

An example of three possible patterns is shown in Table 3 below, where pattern 1 is the impulse function where the values in the check locations represent the expansion of the code generator polynomial.

Table 3
Sync Block Data Field Patterns

Symbol Position	Data Symbols (D(x))					Check Symbols								
	0	1	2	3	4	5	6	58	59	60	61	62	63	
Pattern 1	00	00	00	00	00	00	00	00	01	0F	36	78	40	
Pattern 2	00	01	03	04	05	06	3A	3B	85	24	A9	08		
Pattern 3	CC	CC	CC	CC	CC	CC	CC	CC	CC	B6	D4	B6	D4	
Symbol Identify	B_{39}	B_{38}	B_{37}	B_{36}	B_{35}	B_{34}	B_5	B_6	B_1	B_0	K_3	K_2	K_1	K_0

- (d) Interleaving — Not used.
- (e) Randomization — All data and error correction check characters are randomized before being recorded. (Sync, identification, and fill patterns are not randomized.) The randomizing is equivalent to performing the EXOR operation between the serial data stream, and the serial stream generated by the polynomial function $x^8 + x^4 - x^2 + x^0$ (in GF (2)). The first term is the most significant and the first to enter the division computation.

In order that successive sync blocks are randomized with different sequences, the polynomial generator noted above is pre-set to 80_H (see note) to read for byte 0 of the sync block locations having ID values as follows:

03, 08, 0D, 14, 19, 20, 25, 2A, 31, 36, 3B, 42, 47, 4C, 53, 58, 5D, 64, 69, 70, 75, 7A, 81, 86, 8B, 92, 97, 9C, A3, A8, AD, B4, C3, D3.

(Note: This will generate a byte sequence beginning 80, 38, D2, 81, 49, etc. Although the sync and identification patterns are not randomized, the polynomial generator continues to cycle during this period.)

3.3.5 Sector Preamble. All sectors commence with the preamble sequence.

- (a) Length — 30 bytes
- (b) Arrangement — See Fig. 3(a).
 - Run-up — 20 bytes minimum of CC₁₁ (for clock reference)
 - Sync Pattern — 2 bytes (see 3.3.2)
 - Identification Pattern — 4 bytes (see 3.3.3)
 - Fill — 4 bytes of CC₁₁
 - None (ID data directly recorded).
 - None
 - None
- (c) Protection — None
- (d) Randomization — None
- (e) Interleaving — None

3.3.6 Sector Postamble. All sectors terminate with the postamble sequence.

- (a) Length — 6 bytes.
- (b) Arrangement — See Fig. 3(b).
 - Sync Pattern — 2 bytes (see 3.3.2).
 - Ident Pattern — 4 bytes (see 3.3.3).
 - None.
 - None.
 - None.
- (c) Protection — None.
- (d) Randomization — None.
- (e) Interleaving — None.

4.1.1 Recorded Lines. The last 250 lines from each television field are recorded. These comprise lines 14 through 263 inclusive from field 1 and lines 276 through 525 inclusive from field 2.

3.5 Channel Code. The NRZ data stream shall be recorded directly without further coding.

3.6 Magnetization. During the time interval of a recorded data 1, the polarity of data flux shall be such that the north pole of the magnetic domain shall point in the direction of head motion. Similarly, during the time interval of a recorded data 0, the polarity of data flux shall be such to cause the south pole of the magnetic domain to point in the direction of head motion. Magnetization will bring the tape to saturation.

4. Video Processing

4.1 Recorded Data. Information received during the digital horizontal blanking interval is not recorded on tape. The appropriate blanking data are recreated for output during playback.

4.1.2 Digital Active Line. 720 luminance bytes and 360 bytes for each of the two color difference components, for a total of 1440 bytes, are recorded. These are taken from bytes 0 through 1439 following the 4-byte start of active video (SAV) timing reference signals.

4.1.3 Source Preceding. The input video data stream is preceded by a one-for-one mapping of each source data byte as defined in Table 4. The inverse mapping for the regeneration of the original video source data bytes is defined in Table 5. Data in lines 14-20 and 276-282 inclusive are not pre-coded.

Table 4
Source Video Mapping

INPUT	LS WORD (4 BITS)																E	F
	0	1	2	3	4	5	6	7	8	9	A	B	C	D	81			
0	00	80	40	20	10	08	04	02	01	C0	A0	90	88	84	82	81		
1	00	50	48	44	42	41	30	28	24	22	21	18	14	12	11	OC		
2	0A	09	06	05	03	E0	D0	C8	C4	C2	C1	80	A8	A4	A2	A1		
3	98	94	92	91	8C	8A	89	86	85	83	70	68	64	62	61	58		
4	54	52	51	4C	4A	49	46	45	43	38	34	32	31	2C	2A	29		
5	26	25	23	1C	1A	19	16	15	13	0E	0D	08	07	FO	E8	E4		
6	E2	E1	D8	D4	D2	D1	CC	CA	C9	C6	C5	C3	88	84	82	81		
7	AC	AA	A9	A6	A5	A3	9C	9A	99	96	95	93	8E	8D	8B	87		
8	78	74	72	71	6C	6A	69	66	65	63	5C	5A	59	56	55	53		
9	4E	4D	4B	47	3C	3A	39	36	35	33	2E	2D	2B	27	1E	1D		
A	1B	17	0F	F8	F4	F1	E8	E4	E3	E2	E1	E3	DC	DA	D9	D8		
B	D6	D5	D3	CE	CD	C8	C7	8C	8A	89	B6	B5	83	AE	AD	AB		
C	A7	9E	9D	9B	97	8F	7C	7A	79	76	75	73	6E	6D	6B	67		
D	5E	5D	58	57	4F	3E	3D	3B	37	1F	FC	FB	F9	F6	F5	F4		
E	F3	EE	ED	EB	E7	DE	DD	D8	D7	CF	BE	BD	BB	BF	AF	9F		
F	7E	7D	7B	77	6F	5F	3F	FE	FD	FB	EF	DF	BF	DF	7F	7F		

Table 8
Intraline Word Shuffle

Byte#	Outer Block Number Within Line (Oblk)											
	0	1	2	3	4	5	6	7	8	9	10	11
0	CB0	Y0	CR0	Y1	CB60	Y60	CR60	Y61	CB120	Y120	CR120	Y121
1	CB2	Y2	CR2	Y3	CB62	Y62	CR62	Y63	CB122	Y122	CR122	Y123
2	CB4	Y4	CR4	Y5	CB64	Y64	CR64	Y65	CB124	Y124	CR124	Y125
3	CB6	Y6	CR6	Y7	CB66	Y66	CR66	Y67	CB126	Y126	CR126	Y127
4	CB8	Y8	CR8	Y9	CB68	Y68	CR68	Y69	CB128	Y128	CR128	Y129
5	CB10	Y10	CR10	Y11	CB70	Y70	CR70	Y71	CB130	Y130	CR130	Y131
6	CB12	Y12	CR12	Y13	CB72	Y72	CR72	Y73	CB132	Y132	CR132	Y133
7	CB14	Y14	CR14	Y15	CB74	Y74	CR74	Y75	CB134	Y134	CR134	Y135
8	CB16	Y16	CR16	Y17	CB76	Y76	CR76	Y77	CB136	Y136	CR136	Y137
9	CB18	Y18	CR18	Y19	CB78	Y78	CR78	Y79	CB138	Y138	CR138	Y139
10	CB20	Y20	CR20	Y21	CB80	Y80	CR80	Y81	CB140	Y140	CR140	Y141
11	CB22	Y22	CR22	Y23	CB82	Y82	CR82	Y83	CB142	Y142	CR142	Y143
12	CB24	Y24	CR24	Y25	CB84	Y84	CR84	Y85	CB144	Y144	CR144	Y145
13	CB26	Y26	CR26	Y27	CB86	Y86	CR86	Y87	CB146	Y146	CR146	Y147
14	CB28	Y28	CR28	Y29	CB88	Y88	CR88	Y89	CB148	Y148	CR148	Y149
15	CB30	Y30	CR30	Y31	CB90	Y90	CR90	Y91	CB150	Y150	CR150	Y151
16	CB32	Y32	CR32	Y33	CB92	Y92	CR92	Y93	CB152	Y152	CR152	Y153
17	CB34	Y34	CR34	Y35	CB94	Y94	CR94	Y95	CB154	Y154	CR154	Y155
18	CB36	Y36	CR36	Y37	CB96	Y96	CR96	Y97	CB156	Y156	CR156	Y157
19	CB38	Y38	CR38	Y39	CB98	Y98	CR98	Y99	CB158	Y158	CR158	Y159
20	CB40	Y40	CR40	Y41	CB100	Y100	CR100	Y101	CB160	Y160	CR160	Y161
21	CB42	Y42	CR42	Y43	CB102	Y102	CR102	Y103	CB162	Y162	CR162	Y163
22	CB44	Y44	CR44	Y45	CB104	Y104	CR104	Y105	CB164	Y164	CR164	Y165
23	CB46	Y46	CR46	Y47	CB106	Y106	CR106	Y107	CB166	Y166	CR166	Y167
24	CB48	Y48	CR48	Y49	CB108	Y108	CR108	Y109	CB168	Y168	CR168	Y169
25	CB50	Y50	CR50	Y51	CB110	Y110	CR110	Y111	CB170	Y170	CR170	Y171
26	CB52	Y52	CR52	Y53	CB112	Y112	CR112	Y113	CB172	Y172	CR172	Y173
27	CB54	Y54	CR54	Y55	CB114	Y114	CR114	Y115	CB174	Y174	CR174	Y175
28	CB56	Y56	CR56	Y57	CB116	Y116	CR116	Y117	CB176	Y176	CR176	Y177
29	CB58	Y58	CR58	Y59	CB118	Y118	CR118	Y119	CB178	Y178	CR178	Y179
30	KV1	KV1	KV1	KV1	KV1	KV1	KV1	KV1	KV1	KV1	KV1	KV1
31	KV0	KV0	KV0	KV0	KV0	KV0	KV0	KV0	KV0	KV0	KV0	KV0

Page 14 of 40 pages

SMPTE 227M

Page 13 of 40 pages

quence for the fourth column of each column group is further offset by a constant from the starting point of the row map sequence for the first 3 columns of the column group.

The sector array shuffling is defined by algorithm 1. Tables 9(a-i) show the result of this algorithm and Fig. 10 shows a conceptual block diagram of the method. The algorithm may be considered to operate as follows:

The column counter is cleared at the beginning of each 50-line segment, and incremented every outer block or 12 times per TV line. The least significant 2 bits of the column counter select a column within a 4-column group. The most significant 8 bits are used to address a PROM containing the column map function. The row start PROM is used to select an initial starting point for the row map sequence for each column group, except for the fourth column of the column group, which has a different initial starting point for the row map sequence. The row counter is loaded with the row start preset data at the beginning of each outer block and increments mod 32 every data byte. The row map PROM is used to select the actual row address where the byte is stored in the sector array.

Tables 9(a-i) explicitly list the relation between every byte in the sector array and its location in the input data stream. The array values represent normalized pixel indices, i' or j' , as defined in 4.4.1.

Algorithm 2 shows the de-shuffling scheme.

4.4.2.1 Algorithm 1, Intra-sector Shuffling

Let m designate the line number within a segment, $0 \leq m \leq 49$.

Let Oblk designate the outer block number within a line, as defined in 4.4.1, $0 \leq \text{Oblk} \leq 11$.

Let Obyt designate the outer block byte index, as defined in 4.4.1, $0 \leq \text{Obyt} \leq 31$.

SMPTE 227M

The 360 luminance and chrominance bytes are distributed among 12 outer code blocks as shown in Table 8. Each column represents an outer code block. The last two bytes, KV1, KV0, are outer correction check bytes added by the outer coder. The byte number refers to the byte position within an outer code block.

Let k be the position of a video data byte within a line of the sector data sequence, following the intersector distribution as described above, $0 \leq k/359$. Let Oblk be the outer block column index of Table 7, $0 \leq \text{Oblk} \leq 11$. Let Obyt be the outer block byte number of Table 7, $0 \leq \text{Obyt} \leq 31$.

Then the intraline shuffle described by the following formulas is applied:

$$\text{Oblk} = 4 \text{int}(k/120) + (k \text{ mod } 4)$$

$$\text{Obyt} = \text{int}((k \text{ mod } 120)/4) \text{ (For } 0 \leq \text{Obyt} \leq 29)$$

The result is shown in Table 8.

The inverse mapping is given by the formula, $k = 120 \text{int}(\text{Oblk}/4) + (\text{Oblk} \text{ mod } 4) + 4 * \text{Obyt}$

4.4.2 Sector Array Shuffling. The sector array may be divided into 150 4-column groups, ranging from 0 to 149. The 4 columns within a column group contain (CB, Y, CR, Y) pixel data bytes, respectively. Along a given row within a column group, CB and CR are cosited with respect to the source data, and cosited (or nearly so) with the first Y pixel data byte, while the second Y pixel byte is horizontally offset from the first with respect to the source data.

A column map, which is a permutation of the integers 0 to 149, is used to define the sequence in which column groups are stored in the sector array. A row map, which is a permutation of the integers 0 to 31, is used to define the sequence of rows in which data for a given column is stored in the sector array. The starting point of the row map is different for each column group, and, in addition, the starting point of the row map se-

Table 9(a)
Intrasector Shuffle Memory Map for Sub-array 0

Jgrp:	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14																	
Igrp:	0	11	22	33	44	55	66	77	88	99	110	121	132	143	4																	
Line:	0	3	7	11	14	18	22	25	29	33	36	40	44	47	1																	
Col:	0	3	4	7	8	11	12	15	16	19	20	23	24	27	28	31	32	35	36	39	40	43	44	47	48	51	52	55	56	59		
Data:	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y
Rstrt:	0	5	10	15	20	25	30	3	8	13	18	23	28	1	6	11	16	21	26	31	4	9	14	19	24	29	7	24	29			
Row	0	55	164	155	84	75	4	59	168	159	88	79	8	KV0	172	163	92	83	12	3	176	167	96	87	16	7	KV1	171	76	67		
1	46	37	146	137	66	KV1	50	41	150	141	70	61	54	45	154	145	74	65	58	49	158	149	78	69	KV0	53	162	153	KV0	113		
2	28	19	128	KV0	112	103	32	23	132	123	116	107	36	27	136	127	KV1	111	40	31	140	131	60	51	44	35	144	135	104	95		
3	10	1	174	165	94	85	14	5	178	169	98	89	18	9	KV0	173	102	93	22	13	122	117	106	97	26	17	126	KV1	86	77		
4	56	47	156	147	76	67	KV1	51	160	151	80	71	0	55	164	155	84	75	4	59	168	159	88	79	8	KV0	172	163	68	KV0		
5	38	29	138	129	KV0	113	42	33	142	133	62	117	46	37	146	137	66	KV1	50	41	150	141	70	61	54	45	154	145	114	105		
6	20	11	120	115	104	95	24	15	124	119	108	99	28	19	128	KV0	112	103	32	23	132	123	116	107	36	27	136	127	96	87		
7	2	57	166	157	86	77	6	KV1	170	161	90	81	10	1	174	165	94	85	14	5	178	169	98	89	18	9	KV0	173	78	69		
8	48	39	148	139	68	KV0	52	43	152	143	72	63	56	47	156	147	76	67	KV1	51	160	151	80	71	0	55	164	155	60	51		
9	30	21	130	121	114	105	34	25	134	125	118	109	38	29	138	129	KV0	113	42	33	142	133	62	117	46	37	146	137	106	97		
10	12	3	176	167	96	87	16	7	KV1	171	100	91	20	11	120	115	104	95	24	15	124	119	108	99	28	19	128	KV0	88	79		
11	58	49	158	149	78	69	KV0	53	162	153	82	73	2	57	166	157	86	77	6	KV1	170	161	90	81	10	1	174	165	70	61		
12	40	31	140	131	60	51	44	35	144	135	64	119	48	39	148	139	68	KV0	52	43	152	143	72	63	56	47	156	147	116	107		
13	22	13	122	117	106	97	26	17	126	KV1	110	101	30	21	130	121	114	105	34	25	134	125	118	109	38	29	138	129	98	89		
14	4	59	168	159	88	79	8	KV0	172	163	92	83	12	3	176	167	96	87	16	7	KV1	171	100	91	20	11	120	115	104	95	24	
15	50	41	150	141	70	61	54	45	154	145	74	65	58	49	158	149	78	69	KV0	53	162	153	82	73	2	57	166	157	62	117		
16	32	23	132	123	116	107	36	27	136	127	KV1	111	40	31	140	131	60	51	44	35	144	135	64	119	48	39	148	139	108	99		
17	14	5	178	169	98	89	18	9	KV0	173	102	93	22	13	122	117	106	97	26	17	126	KV1	110	101	30	21	130	121	90	81		
18	KV1	51	160	151	80	71	0	55	164	155	84	75	4	59	168	159	88	79	8	KV0	172	163	92	83	12	3	176	167	72	63		
19	42	33	142	133	62	117	46	37	146	137	66	KV1	50	41	150	141	70	61	54	45	154	145	74	65	58	49	158	149	118	109		
20	24	15	124	119	108	99	28	19	128	KV0	112	103	32	23	132	123	116	107	36	27	136	127	KV1	111	40	31	140	131	100	91		
21	6	KV1	170	161	90	81	10	1	174	165	94	85	14	5	178	169	98	89	18	9	KV0	173	102	93	22	13	122	117	82	73		
22	52	43	152	143	72	63	56	47	156	147	76	67	KV1	51	160	151	80	71	0	55	164	155	84	75	4	59	168	159	64	119		
23	34	25	134	125	118	109	38	29	138	129	KV0	113	42	33	142	133	62	117	46	37	146	137	66	KV1	50	41	150	141	110	101		
24	16	7	KV1	171	100	91	20	11	120	115	104	95	24	15	124	119	108	99	28	19	128	KV0	112	103	32	23	132	123	92	83		
25	KV0	53	162	153	82	73	2	57	166	157	86	77	6	KV1	170	161	90	81	10	1	174	165	94	85	14	5	178	169	74	65		
26	44	35	144	135	64	119	48	39	148	139	68	KV0	52	43	152	143	72	63	56	47	156	147	76	67	KV1	51	160	151	KV1	111		
27	26	17	126	KV1	110	101	30	21	130	121	114	105	34	25	134	125	118	109	38	29	138	129	KV0	113	42	33	142	133	102	93		
28	8	KV0	172	163	92	83	12	3	176	167	96	87	16	7	KV1	171	100	91	20	11	120	115	104	95	24	15	124	119	84	75		
29	54	45	154	145	74	65	58	49	158	149	78	69	KV0	53	162	153	82	73	2	57	166	157	86	77	6	KV1	170	161	66	KV1		
30	36	27	136	127	KV1	111	40	31	140	131	60	51	44	35	144	135	64	119	48	39	148	139	68	KV0	52	43	152	143	112	103		
31	18	9	KV0	173	102	93	22	13	122	117	106	97	26	17	126	KV1	110	101	30	21	130	121	114	105	34	25	134	125	94	85		

Page 16 of 40 pages

NOTES:

- Columns 1 and 2 have the same distribution as column 0, columns 5 and 6 the same as 4, etc.
- Numerical table entries represent horizontal position of byte within TV line. KV0 and KV1 are outer ECC check bytes.

SMPTE 227M

Page 15 of 40 pages

Define the outer block number counting from beginning of the segment, $lcnt$,
 $lcnt = Oblk - 12m, 0 \leq lcnt \leq 599$
 Define the unpermuted 4-column group number, $igrp$,
 $igrp = \text{int}(lcnt/4), 0 \leq igrp \leq 149$
 Define the permuted 4-column group number, $Jgrp$,
 $Jgrp = (41 * igrp) \text{ mod } 150$
 Define the sector array column index, Col ,
 $Col = 4 * Jgrp + (lcnt \text{ mod } 4), 0 \leq Col \leq 599$
 Define $u = 0$ for $(lcnt \text{ mod } 4) = 0, 1, 2$ and $u = 1$ for $(lcnt \text{ mod } 4) = 3$
 Define the row count starting value, $Rstart$,
 $Rstart = (30 * igrp + 5u) \text{ mod } 32$
 Define the row count value, $Rcnt$,
 $Rcnt = (Obyt - Rstart) \text{ mod } 32$
 Define the sector array row address, Row ,
 $Row = (7 * lcnt) \text{ mod } 32$

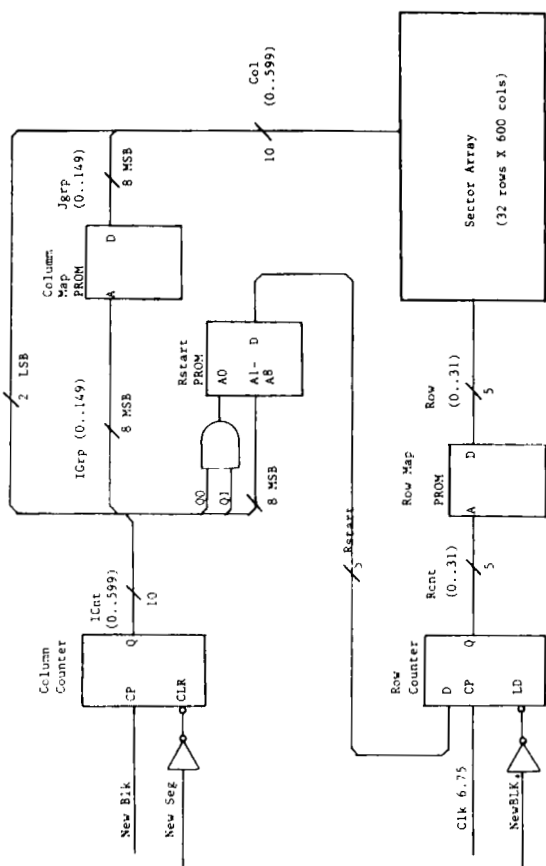


Fig. 10
Intrasector Shuffle Conceptual Implementation
(Reference Only)

SMPTE 227M

Table 9(c)
Intrasector Shuffle Memory Map for Sub-array 2

Jgrp:	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44																	
Igrp:	30	41	52	63	74	85	96	107	118	129	140	1	12	23	34																	
Line:	10	13	17	21	24	28	32	35	39	43	46	0	4	7	11																	
Col:	120	123	124	127	128	131	132	135	136	139	140	143	144	147	148	151	152	155	156	159	160	163	164	167	168	171	172	175	176	179		
Data:	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y
Rstrt:	4	9	14	19	24	29	2	7	12	17	22	27	0	5	10	15	20	25	30	3	8	13	30	3	8	13	18	23	28	1		
Row	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
0	56	47	156	147	76	67	KV1	51	160	151	80	71	0	55	164	155	84	75	4	59	168	159	64	119	48	39	148	139	68	KV0		
1	38	29	138	129	KV0	113	42	33	142	133	62	117	46	37	146	137	66	KV1	50	41	150	141	110	101	30	21	130	121	114	105		
2	20	11	120	175	104	95	24	15	124	179	108	99	28	19	128	KV0	112	103	32	23	132	123	92	83	12	3	176	167	96	87		
3	2	57	166	157	86	77	6	KV1	170	161	90	81	10	1	174	165	94	85	14	5	178	169	74	65	58	49	158	149	78	69		
4	48	39	148	139	68	KV0	52	43	152	143	72	63	56	47	156	147	76	67	KV1	51	160	151	KV1	111	40	31	140	131	60	115		
5	30	21	130	121	114	105	34	25	134	125	118	109	38	29	138	129	KV0	113	42	33	142	133	102	93	22	13	122	177	106	97		
6	12	3	176	167	96	87	16	7	KV1	171	100	91	20	11	120	175	104	95	24	15	124	179	84	75	4	59	168	159	88	79		
7	58	49	158	149	78	69	KV0	53	162	153	82	73	2	57	166	157	86	77	6	KV1	170	161	66	KV1	50	41	150	141	70	61		
8	40	31	140	131	60	115	44	35	144	135	64	119	48	39	148	139	68	KV0	52	43	152	143	112	103	32	23	132	123	116	107		
9	22	13	122	177	106	97	26	17	126	KV1	110	101	30	21	130	121	114	105	34	25	134	125	94	85	14	5	178	169	98	89		
10	4	59	168	159	88	79	8	KV0	172	163	92	83	12	3	176	167	96	87	16	7	KV1	171	76	67	KV1	51	160	151	80	71		
11	50	41	150	141	70	61	54	45	154	145	74	65	58	49	158	149	78	69	KV0	53	162	153	KV0	113	42	33	142	133	62	117		
12	32	23	132	123	116	107	36	27	136	127	KV1	111	40	31	140	131	60	115	44	35	144	135	104	95	24	15	124	179	108	99		
13	14	5	178	169	98	89	18	9	KV0	173	102	93	22	13	122	177	106	97	26	17	126	KV1	86	77	6	KV1	170	161	90	81		
14	KV1	51	160	151	80	71	0	55	164	155	84	75	4	59	168	159	88	79	8	KV0	172	163	92	83	12	3	176	167	96	87		
15	42	33	142	133	62	117	46	37	146	137	66	KV1	50	41	150	141	70	61	54	45	154	145	114	105	34	25	134	125	118	109		
16	24	15	124	179	108	99	28	19	128	KV0	112	103	32	23	132	123	116	107	36	27	136	127	KV1	111	40	31	140	131	60	115		
17	6	KV1	170	161	90	81	10	1	174	165	94	85	14	5	178	169	98	89	18	9	KV0	173	102	93	22	13	122	177	106	97		
18	52	43	152	143	72	63	56	47	156	147	76	67	KV1	51	160	151	80	71	0	55	164	155	84	75	4	59	168	159	88	79		
19	34	25	134	125	118	109	38	29	138	129	KV0	113	42	33	142	133	62	117	46	37	146	137	106	97	26	17	126	KV1	110	101		
20	16	7	KV1	171	100	91	20	11	120	175	104	95	24	15	124	179	108	99	28	19	128	KV0	88	79	8	KV0	172	163	92	83		
21	KV0	53	162	153	82	73	2	57	166	157	86	77	6	KV1	170	161	90	81	10	1	174	165	70	61	54	45	154	145	74	65		
22	44	35	144	135	64	119	48	39	148	139	68	KV0	52	43	152	143	72	63	56	47	156	147	116	107	36	27	136	127	KV1	111	40	
23	26	17	126	KV1	110	101	30	21	130	121	114	105	34	25	134	125	118	109	38	29	138	129	98	89	18	9	KV0	173	102	93		
24	8	KV0	172	163	92	83	12	3	176	167	96	87	16	7	KV1	171	100	91	20	11	120	175	80	71	0	55	164	155	84	75		
25	54	45	154	145	74	65	58	49	158	149	78	69	KV0	53	162	153	82	73	2	57	166	157	62	117	46	37	146	137	66	KV1		
26	36	27	136	127	KV1	111	40	31	140	131	60	115	44	35	144	135	64	119	48	39	148	139	108	99	28	19	128	KV0	112	103		
27	18	9	KV0	173	102	93	22	13	122	177	106	97	26	17	126	KV1	110	101	30	21	130	121	90	81	10	1	174	165	94	85		
28	0	55	164	155	84	75	4	59	168	159	88	79	8	KV0	172	163	92	83	12	3	176	167	72	63	56	47	156	147	76	67		
29	46	37	146	137	66	KV1	50	41	150	141	70	61	54	45	154	145	74	65	58	49	158	149	118	109	38	29	138	129	KV0	113		
30	28	19	128	KV0	112	103	32	23	132	123	116	107	36	27	136	127	KV1	111	40	31	140	131	100	91	20	11	120	175	104	95		
31	10	1	174	165	94	85	14	5	178	169	98	89	18	9	KV0	173	102	93	22	13	122	177	82	73	2	57	166	157	86	77		

Page 18 of 40 pages

NOTES:

- Columns 121 and 122 have the same distribution as column 120, columns 125 and 126 the same as 124, etc.
- Numerical table entries represent horizontal position of byte within TV line. KV0 and KV1 are outer ECC check bytes.

SMPTE 227M

Table 9(b)
Intrasector Shuffle Memory Map for Sub-array 1

Jgrp:	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29															
Igrp:	15	26	37	48	59	70	81	92	103	114	125	136	147	8	19															
Line:	5	8	12	16	19	23	27	30	34	38	41	45	49	2	6															
Col:	60	63	64	67	68	71	72	75	76	79	80	83	84	87	88	91	92	95	96	99	100	103	104	107	108	111	112	115	116	119
Data:	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y
Rstrt:	2	7	12	17	22	27	0	5	10	15	20	25	30	3	8	13	18	23	28	1	6	11	16	21	26	31	16	21	26	31
Row	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29
0	KV1	51	160	151	80	71	0	55	164	155	84	75	4	59	168	159	88	79	8	KV0	172	163	92	83	12	3	152	143	72	63
1	42	33	142	133	62	117	46	37	146	137	66	KV1	50	41	150	141	70	61	54	45	154	145	74	65	58	49	134	125	118	109
2	24	15	124	179	108	99	28	19	128	KV0	112	103	32	23	132	123	116	107	36	27	136	127	KV1	111	40	31	140	131	60	115
3	6	KV1	170	161	90	81	10	1	174	165	94	85	14	5	178	169	98	89	18	9	KV0	173	102	93	22	13	122	177	106	97
4	52	43	152	143	72	63	56	47	156	147	76	67	KV1	51	160	151	80	71	0	55	164	155	84	75	4	59	168	159	88	79
5	34	25	134	125	118	109	38	29	138	129	KV0	113	42	33	142	133	62	117	46	37	146	137	66	KV1	50	41	126	KV0	110	101
6	16	7	KV1	171	100	91	20	11	120	175	104	95	24	15	124	179	108	99	28	19	128	KV0	112	103	32	23	132	123	92	83
7	KV0	53	162	153	82	73	2	57	166	157	86	77	6	KV1	170	161	90	81	10	1	174	165	94	85	14	5	154	145		

Table 9(e)
Intrasector Shuffle Memory Map for Sub-array 4

Jgrp:	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74																	
Igrp:	60	71	82	93	104	115	126	137	148	9	20	31	42	53	64																	
Line:	20	23	27	31	34	38	42	45	49	3	6	10	14	17	21																	
Col:	240	243	244	247	248	251	252	255	256	259	260	263	264	267	268	271	272	275	276	279	280	283	284	287	288	291	292	295	296	299		
Data:	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y		
Rstrt:	8	13	18	23	28	1	6	11	16	21	26	31	4	9	14	19	24	29	14	19	24	29	2	7	12	17	22	27	0	5		
Row																																
0	48	39	148	139	68	KV0	52	43	152	143	72	63	56	47	156	147	76	67	36	27	136	127	KV1	111	40	31	140	131	60	115		
1	30	21	130	121	114	105	34	25	134	125	118	109	38	29	138	129	KV0	113	18	9	KV0	173	102	93	22	13	122	117	106	97		
2	12	3	176	167	96	87	16	7	KV1	171	100	91	20	11	120	115	104	95	0	55	164	155	84	75	4	59	168	159	88	79		
3	58	49	158	149	78	69	KV0	53	162	153	82	73	2	57	166	157	86	77	46	37	146	137	66	KV1	50	41	150	141	70	61		
4	40	31	140	131	60	115	44	35	144	135	64	119	48	39	148	139	68	KV0	28	19	128	KV0	112	103	32	23	132	123	116	107		
5	22	13	122	117	106	97	26	17	126	KV1	110	101	30	21	130	121	114	105	10	1	174	165	94	85	14	5	178	169	98	89		
6	4	59	168	159	88	79	8	KV0	172	163	92	83	12	3	176	167	96	87	56	47	156	147	76	67	KV1	51	160	151	80	71		
7	50	41	150	141	70	61	54	45	154	145	74	65	58	49	158	149	78	69	38	29	138	129	KV0	113	42	33	142	133	62	117		
8	32	23	132	123	116	107	36	27	136	127	KV1	111	40	31	140	131	60	115	20	11	120	115	104	95	24	15	124	119	108	99		
9	14	5	178	169	98	89	18	9	KV0	173	102	93	22	13	122	117	106	97	2	57	166	157	86	77	6	KV1	170	161	90	81		
10	KV1	51	160	151	80	71	0	55	164	155	84	75	4	59	168	159	88	79	48	39	148	139	68	KV0	52	43	152	143	72	63		
11	42	33	142	133	62	117	46	37	146	137	66	KV1	50	41	150	141	70	61	30	21	130	121	114	105	34	25	134	125	118	109		
12	24	15	124	119	108	99	28	19	128	KV0	112	103	32	23	132	123	116	107	12	3	176	167	96	87	16	7	KV1	171	100	91		
13	6	KV1	170	161	90	81	10	1	174	165	94	85	14	5	178	169	98	89	58	49	158	149	78	69	KV0	53	162	153	82	73		
14	52	43	152	143	72	63	56	47	156	147	76	67	KV1	51	160	151	80	71	40	31	140	131	60	115	44	35	144	135	64	119		
15	34	25	134	125	118	109	38	29	138	129	KV0	113	42	33	142	133	62	117	22	13	122	117	106	97	26	17	126	KV1	110	101		
16	16	7	KV1	171	100	91	20	11	120	115	104	95	24	15	124	119	108	99	4	59	168	159	88	79	8	KV0	172	163	92	83		
17	KV0	53	162	153	82	73	2	57	166	157	86	77	6	KV1	170	161	90	81	50	41	150	141	70	61	54	45	154	145	74	65		
18	44	35	144	135	64	119	48	39	148	139	68	KV0	52	43	152	143	72	63	32	23	132	123	116	107	36	27	136	127	KV1	111		
19	26	17	126	KV1	110	101	30	21	130	121	114	105	34	25	134	125	118	109	14	5	178	169	98	89	18	9	KV0	173	102	93		
20	8	KV0	172	163	92	83	12	3	176	167	96	87	16	7	KV1	171	100	91	KV1	51	160	151	80	71	0	55	164	155	84	75		
21	54	45	154	145	74	65	58	49	158	149	78	69	KV0	53	162	153	82	73	42	33	142	133	62	117	46	37	146	137	66	KV1		
22	36	27	136	127	KV1	111	40	31	140	131	60	115	44	35	144	135	64	119	24	15	124	119	108	99	28	19	128	KV0	112	103		
23	18	9	KV0	173	102	93	22	13	122	117	106	97	26	17	126	KV1	110	101	6	KV1	170	161	90	81	10	1	174	165	94	85		
24	0	55	164	155	84	75	4	59	168	159	88	79	8	KV0	172	163	92	83	52	43	152	143	72	63	56	47	156	147	76	67		
25	46	37	146	137	66	KV1	50	41	150	141	70	61	54	45	154	145	74	65	34	25	134	125	118	109	38	29	138	129	KV0	113		
26	28	19	128	KV0	112	103	32	23	132	123	116	107	36	27	136	127	KV1	111	16	7	KV1	171	100	91	20	11	120	115	104	95		
27	10	1	174	165	94	85	14	5	178	169	98	89	18	9	KV0	173	102	93	KV0	53	162	153	82	73	2	57	166	157	86	77		
28	56	47	156	147	76	67	KV1	51	160	151	80	71	0	55	164	155	84	75	44	35	144	135	64	119	48	39	148	139	68	KV0		
29	38	29	138	129	KV0	113	42	33	142	133	62	117	46	37	146	137	66	KV1	26	17	126	KV1	110	101	30	21	130	121	114	105		
30	20	11	120	115	104	95	24	15	124	119	108	99	28	19	128	KV0	112	103	8	KV0	172	163	92	83	12	3	176	167	96	87		
31	2	57	166	157	86	77	6	KV1	170	161	90	81	10	1	174	165	94	85	54	45	154	145	74	65	58	49	158	149	78	69		

NOTES:

- Columns 241 and 242 have the same distribution as column 240, columns 245 and 246 the same as 244, etc.
- Numerical table entries represent horizontal position of byte within TV line. KV0 and KV1 are outer ECC check bytes.

Page 20 of 40 pages

SMPTE 227M

Table 9(d)
Intrasector Shuffle Memory Map for Sub-array 3

Jgrp:	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59																	
Igrp:	45	56	67	78	89	100	111	122	133	144	5	16	27	38	49																	
Line:	15	18	22	26	29	33	37	40	44	48	1	5	9	12	16																	
Col:	180	183	184	187	188	191	192	195	196	199	200	203	204	207	208	211	212	215	216	219	220	223	224	227	228	231	232	235	236	239		
Data:	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y		
Rstrt:	6	11	16	21	26	31	4	9	14	19	24	29	2	7	12	17	22	27	0	5	10	15	20	25	30	3						
Row																																
0	52	43	152	143	72	63	56	47	156	147	76	67	KV1	51	160	151	80	71	0	55	160	151	60	115	44	35	144	135	64	119		
1	34	25	134	125	118	109	38	29	138	129	KV0	113	42	33	142	133	62	117	46	37	122	117	106	97	26	17	126	KV1	110	101		
2	16	7	KV1	171	100	91	20	11	120	115	104	95	24	15	124	119	108	99	28	19	128	159	88	79	8	KV0	172	163	92	83		
3	KV0	53	162	153	82	73	2	57	166	157	86	77	6	KV1	170	161	90	81	10	1	150	141	70	61	54	45	154	145	74	65		
4	44	35	144	135	64	119	48	39	148	139	68	KV0	52	43	152	143	72	63	56	47	132	123	116	107	36	27	136	127	KV1	111		
5	26	17	126	KV1	110	101	30	21	130	121	114	105	34	25	134	125	118	109	38	29	178	169	98	89	18	9	KV0	173	102	93		
6	8	KV0	172	163	92	83	12	3	176	167	96	87	16	7	KV1	171	100	91	20	11	160	151	80	71	0	55	164	155	84	75		
7	54	45	154	145	74	65	58	49	158	149	78	69	KV0	53	162	153	82	73	2	57	142	133	62	117	46	37	146	137	66	KV1		
8	36	27	136	127	KV1	111	40	31	140	131	60	115	44	35	144	135	64	119	48	39	124	119	108	99	28	19	128	KV0	112	103		
9	18	9	KV0	173	102	93	22	13	122	117	106	97	26	17	126	KV1	110	101	30	21	170	161	90	81	10	1	174	165	94	85		
10	0	55	164	155	84	75	4																									

Table 9(g)
Intrasector Shuffle Memory Map for Sub-array 6

Jgrp:	90	91	92	93	94	95	96	97	98	99	100	101	102	103	104																	
Igrp:	90	101	112	123	134	145	6	17	28	39	50	61	72	83	94																	
Line:	30	33	37	41	44	48	2	5	9	13	16	20	24	27	31																	
Col:	360	363	364	367	371	372	375	376	379	380	383	384	387	388	391	392	395	396	399	400	403	404	407	408	411	412	415	416	419			
Data:	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y		
Rstrt:	12	17	22	27	0	5	10	15	20	25	30	3	20	25	30	3	8	13	18	23	28	1	6	11	16	21	26	31	4	9		
Row	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
	40	31	140	131	60	115	44	35	144	135	64	119	24	15	124	179	108	99	28	19	128	KVO	112	103	32	23	132	123	116	107		
	22	13	122	177	106	97	26	17	126	KV1	110	101	6	KV1	170	161	90	81	10	1	174	165	94	85	14	5	178	169	98	89		
	4	59	168	159	88	79	8	KVO	172	163	92	83	52	43	152	143	72	63	56	47	156	147	76	67	KV1	51	160	151	80	71		
	50	41	150	141	70	61	54	45	154	145	74	65	34	25	134	125	118	109	38	29	138	129	KVO	113	42	33	142	133	62	117		
	32	23	132	123	116	107	36	27	136	127	KV1	111	16	7	KV1	171	100	91	20	11	120	175	104	95	24	15	124	179	108	99		
	14	5	178	169	98	89	18	9	KVO	173	102	93	KVO	53	162	153	82	73	2	57	166	157	86	77	6	KV1	170	161	90	81		
	KV1	51	160	151	80	71	0	55	164	155	84	75	44	35	144	135	64	119	48	39	148	139	68	KVO	52	43	152	143	72	63		
	42	33	142	133	62	117	46	37	146	137	66	KV1	26	17	126	KV1	110	101	30	21	130	121	114	105	34	25	134	125	118	109		
	24	15	124	179	108	99	28	19	128	KVO	112	103	8	KVO	172	163	92	83	12	3	176	167	96	87	16	7	KV1	171	100	91		
	6	KV1	170	161	90	81	10	1	174	165	94	85	54	45	154	145	74	65	58	49	158	149	78	69	KVO	53	162	153	82	73		
	52	43	152	143	72	63	56	47	156	147	76	67	36	27	136	127	KV1	111	40	31	140	131	60	115	44	35	144	135	64	119		
	34	25	134	125	118	109	38	29	138	129	KVO	113	18	9	KVO	173	102	93	22	13	122	177	106	97	26	17	126	KV1	110	101		
	16	7	KV1	171	100	91	20	11	120	175	104	95	0	55	164	155	84	75	4	59	168	159	88	79	8	KVO	172	163	92	83		
	KVO	53	162	153	82	73	2	57	166	157	86	77	46	37	146	137	66	KV1	50	41	150	141	70	61	54	45	154	145	74	65		
	44	35	144	135	64	119	48	39	148	139	68	KVO	28	19	128	KVO	112	103	32	23	132	123	116	107	36	27	136	127	KV1	111		
	26	17	126	KV1	110	101	30	21	130	121	114	105	10	1	174	165	94	85	14	5	178	169	98	89	18	9	KVO	173	102	93		
	8	KVO	172	163	92	83	12	3	176	167	96	87	56	47	156	147	76	67	KV1	51	160	151	80	71	0	55	164	155	84	75		
	54	45	154	145	74	65	58	49	158	149	78	69	KVO	53	162	153	82	73	2	57	166	157	86	77	6	KV1	170	161	90	81		
	36	27	136	127	KV1	111	40	31	140	131	60	115	20	11	120	175	104	95	24	15	124	179	108	99	28	19	128	KVO	112	103		
	18	9	KVO	173	102	93	22	13	122	177	106	97	26	17	126	KV1	110	101	30	21	130	121	114	105	34	25	134	125	118	109		
	0	55	164	155	84	75	4	59	168	159	88	79	48	39	148	139	68	KVO	52	43	152	143	72	63	56	47	156	147	76	67		
	46	37	146	137	66	KV1	50	41	150	141	70	61	30	21	130	121	114	105	34	25	134	125	118	109	38	29	138	129	KVO	113		
	28	19	128	KVO	112	103	32	23	132	123	116	107	12	3	176	167	96	87	16	7	KV1	171	100	91	20	11	120	175	104	95		
	10	1	174	165	94	85	14	5	178	169	98	89	58	49	158	149	78	69	KVO	53	162	153	82	73	2	57	166	157	86	77		
	56	47	156	147	76	67	KV1	51	160	151	80	71	40	31	140	131	60	115	44	35	144	135	64	119	48	39	148	139	68	KVO		
	38	29	138	129	KVO	113	42	33	142	133	62	117	22	13	122	177	106	97	26	17	126	KV1	110	101	30	21	130	121	114	105		
	20	11	120	175	104	95	24	15	124	179	108	99	4	59	168	159	88	79	8	KVO	172	163	92	83	12	3	176	167	96	87		
	10	1	174	165	94	85	14	5	178	169	98	89	58	49	158	149	78	69	KVO	53	162	153	82	73	2	57	166	157	86	77		
	56	47	156	147	76	67	KV1	51	160	151	80	71	40	31	140	131	60	115	44	35	144	135	64	119	48	39	148	139	68	KVO		
	38	29	138	129	KVO	113	42	33	142	133	62	117	22	13	122	177	106	97	26	17	126	KV1	110	101	30	21	130	121	114	105		
	20	11	120	175	104	95	24	15	124	179	108	99	4	59	168	159	88	79	8	KVO	172	163	92	83	12	3	176	167	96	87		
	2	57	166	157	86	77	6	KV1	170	161	90	81	50	41	150	141	70	61	54	45	154	145	74	65	58	49	158	149	78	69		
	48	39	148	139	68	KVO	52	43	152	143	72	63	32	23	132	123	116	107	36	27	136	127	KV1	111	40	31	140	131	60	115		
	30	21	130	121	114	105	34	25	134	125	118	109	38	29	138	129	KVO	113	42	33	142	133	62	117	22	13	122	177	106	97		
	16	7	KV1	171	100	91	20	11	120	175	104	95	24	15	124	179	108	99	4	59	168	159	88	79	8	KVO	172	163	92	83		
	40	31	140	131	60	115	44	35	144	135	64	119	48	39	148	139	68	KVO	52	43	152	143	72	63	56	47	156	147	76	67		
	22	13	122	177	106	97	26	17	126	KV1	110	101	30	21	130	121	114	105	34	25	134	125	118	109	38	29	138	129	KVO	113		
	14	5	178	169	98	89	18	9	KVO	173	102	93	22	13	122	177	106	97	26	17	126	KV1	110	101	30	21	130	121	114	105		
	6	KV1	170	161	90	81	10	1	174	165	94	85	54	45	154	145	74	65	58	49	158	149	78	69	KVO	53	162	153	82	73		
	52	43	152	143	72	63	56	47	156	147	76	67	KV1	51	160	151	80	71	40	31	140	131	60	115	44	35	144	135	64	119		
	34	25	134	125	118	109	38	29	138	129	KVO	113	42	33	142	133	62	117	22	13	122	177	106	97	26	17	126	KV1	110	101		
	16	7	KV1	171	100	91	20	11	120	175	104	95	24	15	124	179	108	99	4	59	168	159	88	79	8	KVO	172	163	92	83		
	40	31	140	131	60	115	44	35	144	135	64	119	48	39	148	139	68	KVO	52	43	152	143	72	63	56	47	156	147	76	67		
	22	13	122	177	106	97	26	17	126	KV1	110	101	30	21	130	121	114	105	34	25	134	125	118	109	38	29	138	129	KVO	113		
	14	5	178	169	98	89	18	9	KVO	173	102	93	22	13	122	177	106	97	26	17	126	KV1	110	101	30	21	130	121	114	105		
	6	KV1	170	161	90	81	10	1	174	165	94	85	54	45	154	145	74	65	58	49	158	149	78	69	KVO	53	162	153	82	73		
	52	43	152	143	72	63	56	47	156	147	76	67	KV1	51	160	151	80	71	40	31	140	131	60	115	44	35	144	135	64	119		
	34	25	134	125	118	109	38	29	138	129	KVO	113	42	33	142	133	62	117	22	13	122	177	106	97								

Table 9(l)
Intrasector Shuffle Memory Map for Sub-array 8

Jgrp:	120	121	122	123	124	125	126	127	128	129	130	131	132	133	134																	
Igrp:	120	131	142	3	14	25	36	47	58	69	80	91	102	113	124																	
Line:	40	43	47	1	4	8	12	15	19	23	26	30	34	37	41																	
Col:	480	483	484	487	488	491	492	495	496	499	500	503	504	507	508	511	512	515	516	519	520	523	524	527	528	531	532	535	536	539		
Data:	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y
Rstrt:	16	21	26	31	4	9	26	31	4	9	14	19	24	29	2	7	12	17	22	27	0	5	10	15	20	25	30	3	8	13		
Row	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
	32	23	132	123	116	107	12	3	176	167	96	87	16	7	KV1	171	100	91	20	11	120	175	104	95	24	15	124	179	108	99		
	14	5	178	169	98	89	58	49	158	149	78	69	KV0	53	162	153	82	73	2	57	166	157	86	77	6	KV1	170	161	90	81		
	KV1	51	160	151	80	71	40	31	140	131	60	115	44	35	144	135	64	119	48	39	148	139	68	KV0	52	43	152	143	72	63		
	42	33	142	133	62	117	22	13	122	177	106	97	26	17	126	KV1	110	101	30	21	130	121	114	105	34	25	134	125	118	109		
	24	15	124	179	108	99	4	59	168	159	88	79	8	KV0	172	163	92	83	12	3	176	167	96	87	16	7	KV1	171	100	91		
	6	KV1	170	161	90	81	50	41	150	141	70	61	54	45	154	145	74	65	58	49	158	149	78	69	KV0	53	162	153	82	73		
	52	43	152	143	72	63	32	23	132	123	116	107	36	27	136	127	KV1	111	40	31	140	131	60	115	44	35	144	135	64	119		
	34	25	134	125	118	109	14	5	178	169	98	89	18	9	KV0	173	102	93	22	13	122	177	106	97	26	17	126	KV1	110	101		
	16	7	KV1	171	100	91	KV1	51	160	151	80	71	0	55	164	155	84	75	4	59	168	159	88	79	8	KV0	172	163	92	83		
	KV0	53	162	153	82	73	42	33	142	133	62	117	46	37	146	137	66	KV1	50	41	150	141	70	61	54	45	154	145	74	65		
	44	35	144	135	64	119	24	15	124	179	108	99	28	19	128	KV0	112	103	32	23	132	123	116	107	36	27	136	127	KV1	111		
	26	17	126	KV1	110	101	6	KV1	170	161	90	81	10	1	174	165	94	85	14	5	178	169	98	89	18	9	KV0	173	102	93		
	8	KV0	172	163	92	83	52	43	152	143	72	63	56	47	156	147	76	67	KV1	51	160	151	80	71	0	55	164	155	84	75		
	54	45	154	145	74	65	34	25	134	125	118	109	38	29	138	129	KV0	113	42	33	142	133	62	117	46	37	146	137	66	KV1		
	36	27	136	127	KV1	111	16	7	KV1	171	100	91	20	11	120	175	104	95	24	15	124	179	108	99	28	19	128	KV0	112	103		
	18	9	KV0	173	102	93	KV0	53	162	153	82	73	2	57	166	157	86	77	6	KV1	170	161	90	81	10	1	174	165	94	85		
	0	55	164	155	84	75	44	35	144	135	64	119	48	39	148	139	68	KV0	52	43	152	143	72	63	56	47	156	147	76	67		
	46	37	146	137	66	KV1	50	41	150	141	70	61	54	45	154	145	74	65	58	49	158	149	78	69	KV0	53	162	153	82	73		
	28	19	128	KV0	112	103	32	23	132	123	92	83	12	3	176	167	96	87	16	7	KV1	171	100	91	20	11	120	175	104	95		
	10	1	174	165	94	85	14	5	178	169	98	89	18	9	KV0	173	102	93	22	13	122	177	106	97	26	17	126	KV1	110	101		
	56	47	156	147	76	67	36	27	136	127	KV1	111	40	31	140	131	60	115	44	35	144	135	64	119	48	39	148	139	68	KV0		
	38	29	138	129	KV0	113	18	9	KV0	173	102	93	22	13	122	177	106	97	26	17	126	KV1	110	101	30	21	130	121	114	105		
	20	11	120	175	104	95	0	55	164	155	84	75	4	59	168	159	88	79	8	KV0	172	163	92	83	12	3	176	167	96	87		
	2	57	166	157	86	77	46	37	146	137	66	KV1	50	41	150	141	70	61	54	45	154	145	74	65	58	49	158	149	78	69		
	48	39	148	139	68	KV0	28	19	128	KV0	112	103	32	23	132	123	116	107	36	27	136	127	KV1	111	40	31	140	131	60	115		
	25	30	21	130	121	114	105	34	25	134	125	118	109	38	29	138	129	KV0	113	42	33	142	133	62	117	46	37	146	137	66	KV1	
	12	3	176	167	96	87	16	7	KV1	171	100	91	20	11	120	175	104	95	24	15	124	179	108	99	28	19	128	KV0	112	103		
	58	49	158	149	78	69	KV0	53	162	153	82	73	2	57	166	157	86	77	6	KV1	170	161	90	81	10	1	174	165	94	85		
	4	59	168	159	88	79	8	KV0	172	163	92	83	12	3	176	167	96	87	16	7	KV1	171	100	91	20	11	120	175	104	95		
	10	1	174	165	94	85	14	5	178	169	98	89	18	9	KV0	173	102	93	22	13	122	177	106	97	26	17	126	KV1	110	101		
	56	47	156	147	76	67	36	27	136	127	KV1	111	40	31	140	131	60	115	44	35	144	135	64	119	48	39	148	139	68	KV0		
	38	29	138	129	KV0	113	18	9	KV0	173	102	93	22	13	122	177	106	97	26	17	126	KV1	110	101	30	21	130	121	114	105		
	20	11	120	175	104	95	24	15	124	179	108	99	28	19	128	KV0	112	103	32	23	132	123	116	107	36	27	136	127	KV1	111		
	2	57	166	157	86	77	6	KV1	170	161	90	81	10	1	174	165	94	85	14	5	178	169	98	89	18	9	KV0	173	102	93	22	
	48	39	148	139	68	KV0	52	43	152	143	72	63	56	47	156	147	76	67	KV1	50	41	150	141	70	61	54	45	154	145	74	65	
	25	30	21	130	121	114	105	34	25	134	125	118	109	38	29	138	129	KV0	113	42	33	142	133	62	117	46	37	146	137	66	KV1	
	12	3	176	167	96	87	16	7	KV1	171	100	91	20	11	120	175	104	95	24	15	124	179	108	99	28	19	128	KV0	112	103		
	58	49	158	149	78	69	KV0	53	162	153	82	73	2	57	166	157	86	77	6	KV1	170	161	90	81	10	1	174	165	94	85		
	4	59	168	159	88	79	8	KV0	172	163	92	83	12	3	176	167	96	87	16	7	KV1	171	100	91	20	11	120	175	104	95		
	10	1	174	165	94	85	14	5	178	169	98	89	18	9	KV0	173	102	93	22	13	122	177	106	97	26	17	126	KV1	110	101		
	56	47	156	147	76	67	36	27	136	127	KV1	111	40	31	140	131	60	115	44	35	144	135	64	119	48	39	148	139	68	KV0		
	38	29	138	129	KV0	113	18	9	KV0	173	102	93	22	13	122	177	106	97	26	17	126	KV1	110	101	30	21	130	121	114	105		
	20	11	120	175	104	95	24	15	124	179	108	99	28	19	128	KV0	112	103	32	23	132	123	116	107	36	27	136	127	KV1	111		
	2	57	166	157	86	77	6	KV1	170	161	90	81	10	1	174	165	94	85	14	5	178	169	98	89	18	9	KV0	173	102	93	22	
	48	39	148	139	68	KV0	52	43	152	143	72	63	56	47	156	147	76	67	KV1	50	41	150	141	70	61	54	45	154	145	74	65	
	25	30	21	130	121	114	105	34	25	134	125	118	109	38	29	138	129	KV0	113	42	33	142	133	62	117	46	37	146	137	66	KV1	
	12	3	176	167	96	87	16	7	KV1	171	100	91	20	11	120	175	104	95	24	15	124	179	108	99	28	19	128	KV0	1			

For sectors 1 and 3, which are adjacent to sectors 0 and 2, respectively, on tape, the data are read out with a 16-row offset relative to sectors 0 and 2. In addition, there is a further variation of the row address over a 4-field sequence. Table 10 summarizes the row address modification necessary, depending on field and sector number.

Col and Row define the sector array location where a data byte (either video data or outer correction check) is located.

For field 0, sectors 0 and 2, data are read from the sector array in a "raster scan" sequence and written to tape. (That is, the data in row 0, columns 0 through 599 are read, then row 1, columns 0 through 599, and so forth, through row 31).

Table 10
Four-Field Sequence Intrasector Shuffling

Sectors 0, 2		Sectors 1, 3	
Field 0:	R = Row	R = (16 + Row) mod 32	
Field 1:	R = (31 - Row) mod 32	R = (15 - Row) mod 32	
Field 2:	R = (8 + Row) mod 32	R = (24 + Row) mod 32	
Field 3:	R = (7 - Row) mod 32	R = (23 - Row) mod 32	

Let p designate the inner block number on tape, $0 \leq p \leq 319$. The sync block ID number written on tape for even p is $(\text{int}(p/2)+3)$ base 14.

Let q designate the byte number within an inner block on tape, $0 \leq q \leq 59$. **4.4.2.2 Algorithm 2, Intrasector Deshuffling (reference only)**

Given the inner block number, p, and position within the block, q, on tape, calculate R, $R = \text{int}(p/10)$.

The byte at location (Row, Col) in the sector array thus appears at location $60p + q$ on the tape. Calculate Row according to Table 11.

Table 11
Four-Field Intrasector Deshuffling

Sector 0, 2		Sector 1, 3	
Field 0:	Row = R	Row = (16 + R) mod 32	
Field 1:	Row = (31 - R) mod 32	Row = (15 - R) mod 32	
Field 2:	Row = (24 + R) mod 32	Row = (8 + R) mod 32	
Field 3:	Row = (7 - R) mod 32	Row = (23 - R) mod 32	

Calculate Col, $\text{Col} = 60(p \text{ mod } 10) + q$. Calculate the inverse permuted 4-column group number, Jgrp, $\text{Jgrp} = 11 * \text{Jgrp} \text{ mod } 150$.

Thus, the byte at location $60p + q$ on the tape appears at (Row, Col) in the sector array. Calculate lcnt, $\text{lcnt} = \text{Jgrp} * 4 + (\text{Col} \text{ mod } 4), 0 \leq \text{lcnt} \leq 599$.

Calculate the 4-column group number, Jgrp: Define $u = 0$ for $(\text{lcnt} \text{ mod } 4) = 0, 1, 2$, $u = 1$ for $(\text{lcnt} \text{ mod } 4) = 3$. $\text{Jgrp} = \text{int}(\text{Col}/4), 0 \leq \text{Jgrp} \leq 149$.

Table 9(j)
Intrasector Shuffle Memory Map for Sub-array 9

Jgrp:	135	136	137	138	139	140	141	142	143	144	145	146	147	148	149																
Igrp:	135	146	7	18	29	40	51	62	73	84	95	106	117	128	139																
Line:	45	48	2	6	9	13	17	20	24	28	31	35	39	42	46																
Col:	540	543	544	547	548	551	552	555	556	559	560	563	564	567	568	571	572	575	576	579	580	583	584	587	588	591	592	595	596	599	
Data:	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	CbYCr	Y	
Rstr:	18	23	28	1	18	23	28	1	6	11	16	21	26	31	4	9	14	19	24	29	2	7	12	17	22	27	0	5	10	15	
Row	0	28	19	128	KV0	88	79	8	KV0	172	163	92	83	12	3	176	167	96	87	16	7	KV1	171	100	91	20	11	120	175	104	95
1	10	1	174	165	70	61	54	45	154	145	74	65	58	49	158	149	78	69	KV0	53	162	153	82	73	2	57	166	157	86	77	
2	56	47	156	147	116	107	36	27	136	127	KV1	111	40	31	140	131	60	115	44	35	144	135	64	119	48	39	148	139	68	KV0	
3	38	29	138	129	98	89	18	9	KV0	173	102	93	22	13	122	177	106	97	26	17	126	KV1	110	101	30	21	130	121	114	105	
4	20	11	120	175	80	71	0	55	164	155	84	75	4	59	168	159	88	79	8	KV0	172	163	92	83	12	3	176	167	96	87	
5	2	57	166	157	82	117	46	37	146	137	66	KV1	50	41	150	141	70	61	54	45	154	145	74	65	58	49	158	149	78	69	
6	48	39	148	139	108	99	28	19	128	KV0	112	103	32	23	132	123	116	107	36	27	136	127	KV1	111	40	31	140	131	60	115	
7	30	21	130	121	90	81	10	1	174	165	94	85	14	5	178	169	98	89	18	9	KV0	173	102	93	22	13	122	177	106	97	
8	12	3	176	167	72	63	56	47	156	147	76	67	KV1	51	160	151	80	71	0	55	164	155	84	75	4	59	168	159	88	79	
9	58	49	158	149	118	109	38	29	138	129	KV0	113	42	33	142	133	62	117	46	37	146	137	66	KV1	50	41	150	141	70	61	
10	40	31	140	131	100	91	20	11	120	175	104	95	24	15	124	179	108	99	28	19	128	KV0	112	103	32	23	132	123	116	107	
11	22	13	122	177	82	73	2	57	166	157	86	77	6	KV1	170	161	90	81	10	1	174	165	94	85	14	5	178	169	98	89	
12	4	59	168	159	64	119	48	39	148	139	68	KV0	52	43	152	143	72	63	56	47	156	147	76	67	KV1	51	160	151	80	71	
13	50	41	150	141	110	101	30	21	130	121	114	105	34	25	134	125	118	109	38	29	138	129	KV0	113	42	33	142	133	62	117	
14	32	23	132	123	92	83	12	3	176	167	96	87	16	7	KV1	171	100	91	20	11	120	175	104	95	24	15	124	179	108	99	
15	14	5	178	169	74	65	58	49	158	149	78	69	KV0	53	162	153	82	73	2	57	166	157	86	77	6	KV1	170	161	90	81	
16	KV1	51	160	151	KV1	111	40	31	140	131	60	115	44	35	144	135	64	119	48	39	148	139	68	KV0	52	43	152	143	72	63	
17	42	33	142	133	102	93	22	13	122	177	106	97	26	17	126	KV1	110	101	30	21	130	121	114	105	34	25	134	125	118	109	
18	24	15	124	179	84	75	4	59	168	159	88	79	8	KV0	172	163	92	83	12	3	176	167	96	87	16	7	KV1	171	100	91	
19	6	KV1	170	161	66	KV1	50	41	150	141	70	61	54	45	154	145	74	65	58	49	158	149	78	69	KV0	53	162	153	82	73	
20	52	43	152	143	112	103	32	23	132	123	116	107	36	27	136	127	KV1	111	40	31	140	131	60	115	44	35	144	135	64	119	
21	34	25	134	125	94	85	14	5	178	169	98	89	18	9	KV0	173	102	93	22	13	122	177	106	97	26	17	126	KV1	110	101	
22	16	7	176	167	76	67	KV1	51	160	151	80	71	0	55	164	155	84	75	4	59	168	159	88	79	8	KV0	172	163	92	83	
23	KV0	53	162	153	KV0	113	42	33	142	133	62	117	46	37	146	137	66	KV1	50	41	150	141	70	61	54	45	154	145	74	65	
24	44	35	144	135	104	95	24	15	124	179	108	99	28	19	128	KV0	112	103	32	23	132	123	116	107	36	27	136	127	KV1	111	
25	26	17	126	KV1	86	77	6	KV1	170	161	90	81	10	1	174	165	94	85	14	5	178	169	98	89	18	9	KV0	173	102	93	
26	8	KV0	172	163	68	KV0	52	43	152	143	72	63	56	47	156	147	76	67	KV1	51	160	151	80	71	0	55	164	155	84	75	
27	54	45	154	145	114	105	34	25	134	125	118	109	38	29	138	129	KV0	113	42	33	142	133	62	117	46	37	146	137	66	KV1	
28	36	27	136	127	96	87	16	7	KV1	171	100	91	20	11	120	175	104	95	24	15	124	179	108	99	28	19	128	KV0	112	103	
29	18	9	KV0	173	78	69	KV0	53	162	153	82	73	2	57	166	157	86	77	6	KV1	170	161	90	81	10	1	174	165	94	85	
30	0	5	164	155	60	115	44	35	144	135	64	119	48	39	148	139	68	KV0	52	43	152	143	72	63	56	47	156	147	76	67	
31	46	37	146	137	106	97	26	17	126	KV1	110	101	30	21	130	121	114	105	34	25	134	125	118	109	38	29	138	129	KV0	113	

NOTES:

- Columns 541 and 542 have the same distribution as column 540, columns 545 and 546 the same as 544, etc.
- Numerical table entries represent horizontal position of byte within TV line. KV0 and KV1 are outer ECC check bytes.

Calculate Rstart,
 $Rstart = (30 * lgrp + 5u) \text{ mod } 32,$
 Calculate Rcnt,
 $Rcnt = (23 * Row) \text{ mod } 32,$
 Calculate Obyt,
 $Oblk = (Rcnt - Rstart) \text{ mod } 32,$

Calculate Oblk,
 $Oblt = lcnt \text{ mod } 12,$
 Calculate line number, m,
 $m = \text{int}(lgrp/3), 0 \leq m \leq 49.$
 The intrasector mapping from (m, Oblk, Obyt) to the output order may be derived from the formula in 4.3 and 4.4.1 above.

4.5 Outer Error Protection. Two rows of each video sub-array contain the error correction check data associated with each column of 8-bit bytes.

Type — Reed-Solomon

Galois Field — GF (256)

Field Generator polynomial — $x^8 + x^4 + x^3 + x^2 + x^0$
 (x are place keeping variables in GF (2), the binary field.)

Order of Use — left-most term is the most significant, "oldest" in time computationally, and first written to tape.

Code Generator polynomial — $G(x) = (x + \alpha^9)(x + \alpha^1),$ where α^1 is given by α^{21} in GF (256).

Check Characters — K_1 and K_0 in $K_1x^1 + K_0x^0,$ the remainder after dividing $x^2 D(x)$ by $G(x),$ where $D(x)$ is the polynomial given by
 $D(x) = B_{29}x^{29} + B_{28}x^{28} + \dots + B_1x^1 + B_0x^0$

Equation of Full Code — $B_{29}x^{31} + B_{28}x^{30} + \dots + B_0x^2 + K_1x^1 + K_0x^0$

Table 12 shows an example of three possible patterns, where pattern 1 is the impulse function, where the values in the check location represent the expansion of the code generator polynomial.

Table 12
 Outer Error Protection Patterns

Symbol Position	Data Symbols — D(x)					Check Symbols				
	0	1	2	3	4	5	28	29	30	31
Pattern 1	00	00	00	00	00	00	01	03	02	
Pattern 2	00	01	03	03	04	05	1C	1D	68	6A
Pattern 3	CC	CC	CC	CC	CC	CC	CC	CC	4D	4D
Symbol Identify	B_{29}	B_{28}	B_{27}	B_{26}	B_{25}	B_{24}	B_1	B_0	K_1	K_0

5. Audio Processing

5.1 Introduction. Audio in each of the four channels is processed independently and identically into two product blocks for each channel dimension of 60 X 7. The audio samples of each channel are distributed alternately into these two blocks and are then shuffled after the addi-

tion of error correction data in the vertical (7) dimension. Error correction in the horizontal (60) dimension is common with video data, as are synchronization and channel coding. Control words are multiplexed with the audio data in the product block to provide housekeeping in the interface and in processing.

5.2 Source Coding (AES/EBU). Audio records are formed independently for each of four audio channels, from audio and ancillary data at the input interface that meet the requirements of ANSI S4.40-1985. These data include audio data, channel status data (C), user data (U), and validity data (V). Parity bits are checked for correctness of data and then discarded. The resulting bit positions in the audio data words are reserved (R) for future use. Block sync marks for ancillary data are also processed.

Source data is defined as follows:

5.2.1 Audio Data:

Sampling Frequency — 48 kHz \pm 3 parts in 10⁶, synchronous with video. For some nonstandard applications, an asynchronous sampling frequency between 47.7 and 48.25 kHz may be employed.)

Word Length — 20 + 4 bits.

Coding — Two's complement linear PCM.

5.2.2 Channel Status Data:

Bit Rate — 48 kbit/sec (nominal)

Word Rate — 6 kbyte/sec

Word Length — 8 bits

Block Length — 192 bits, 24 words

Coding — See ANSI S4.40-1985

Note 1: Bytes 0 and 1 of status data only are selected for special processing in the digital television tape recorder. The contents of bytes 0 and 1 are shown in Fig. 11.

Note 2: Bytes 22 and 23 of the status data contain protection and validity information for bytes 0-21 and may be used in some source decoders.

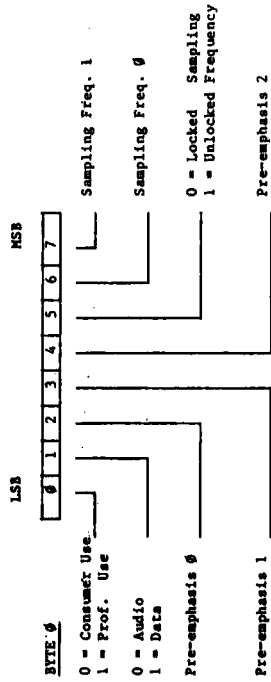


Fig. 11

Channel Status Data - Byte 0

Bits 2, 3, 4 of this byte are recorded in a control word.

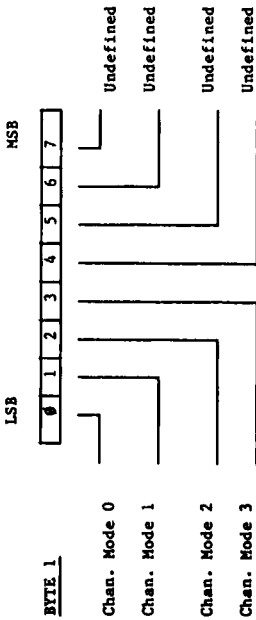


Fig. 12 Channel Status Data - Byte 1

Table 13 Byte Status

Mode	0	1	2	3
0	0	0	0	0
1	0	0	0	1
2	0	0	1	0
3	0	0	1	1
4	0	1	0	0
5	0	1	0	1
through	through	through	through	through
F	1	1	1	1

5.2.3 User Data. As status data but data coding is undefined.

5.2.4 Validity Data:

Bit Rate — One bit associated with each audio word.

Coding — 0 = sample valid

1 = sample defective.

5.2.5 Parity Bit:

Bit Rate — One bit associated with each audio word.

Coding — Even parity of associated word including audio, status, user, and validity data.

5.3 Source Processing

5.3.1 Introduction. Audio data is processed in segments corresponding in duration to four helical tracks or one fifth of a video frame. Each segment contains approximately 320 audio samples for an audio channel with associated status, user, and validity data. In addition, a number of control and user words are added to the data in the last complete block received.

5.3.2 Segment. Each segment of audio data is processed into two audio blocks of 10 X 60 bytes, each corresponding to a sector. One block contains even-numbered words and the other odd-numbered words. The data portion of the block is 7 X 60 with the balance being outer error correction words. For convenience, data is processed in four-bit words:

- Audio data words — 318 to 322 data words with associated C, U, V, R bits (20 bits total per word)
- Interface control words — 6 words of four bits and 2 words of eight bits. (For security, one word, LNQH, is written four times in each block.)
- Processor control words — 9 words of four bits. (For security, two words, B CNT and SEQN, are written four times in each block.)
- User control words — 8 words of eight bits are included in each block, giving a total of 16 bytes per segment for user data.

5.3.3 Audio Data Word Processing. Input data is formed into words of twenty bits in the sequence: input in accord with Table 14.

5.3.3.1 Assignment of the twenty-bit word to audio and associated data is controlled by user input in accord with Table 14.

Table 14 Audio Interface Control Input

Word Mode	Bit			
	0	1	2	3
0 (000)	C	U	V	R
1 (001)	C	U	V	Audio 0 (LSB)
2 (010)	C	V	Audio 0 (LSB)	Audio 1
3 (011)	C	U	Audio 0 (LSB)	Audio 1
4 (100)	C	Audio 0 (LSB)	Audio 1	Audio 2
5 (101)	V	Audio 0 (LSB)	Audio 1	Audio 2
6 (110)	U	Audio 0 (LSB)	Audio 1	Audio 2
7 (111)	Audio 0 (LSB)	Audio 1	Audio 2	Audio 3

The most significant bit of the audio word is in bit 19 and unused bits of lower significance are removed. The interface control word (ICW) LNQH (four bits) signals the word mode selected.

5.3.3.2 The twenty-bit words formed as in 5.3.3.1 above are separated into two groups by selection of alternate words into EVEN (0, 2, 4, etc) and ODD (1, 3, 5, etc) beginning at the start of the sequence.

5.3.3.3 Each group of twenty-bit words is divided into 8-bit bytes as shown in Fig. 13, beginning with the LSB of the first word of the word group.

5.3.3.4 Each group (ODD or EVEN) is distributed into the product block in accordance with Fig. 14. Words 159 (bytes 9,55; 9,56; 9,57) and word 160 (bytes 3,55; 3,56; 3,57) may not be present in all blocks dependent on the current relationship between video and audio clock synchronization and phasing. When not used, this space is zero filled. The processing control word (PCW) & CNT specifies the length of the block between 397 1/2 bytes (159 audio data words) and 402 1/2 bytes (161 audio data words).

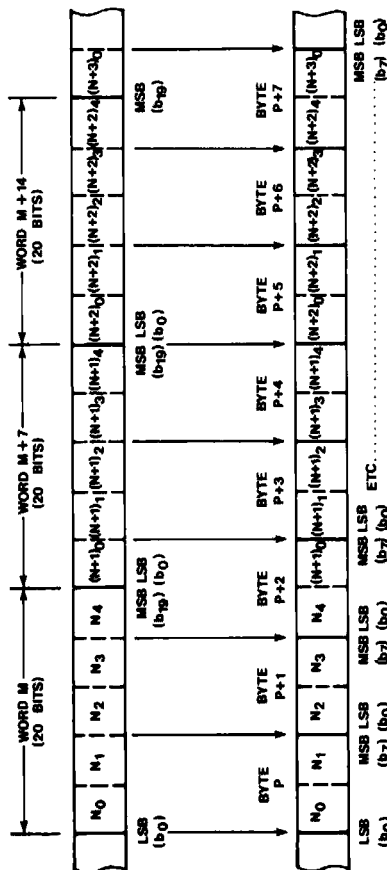


Fig. 13
Word to Byte Conversion for Digital Audio

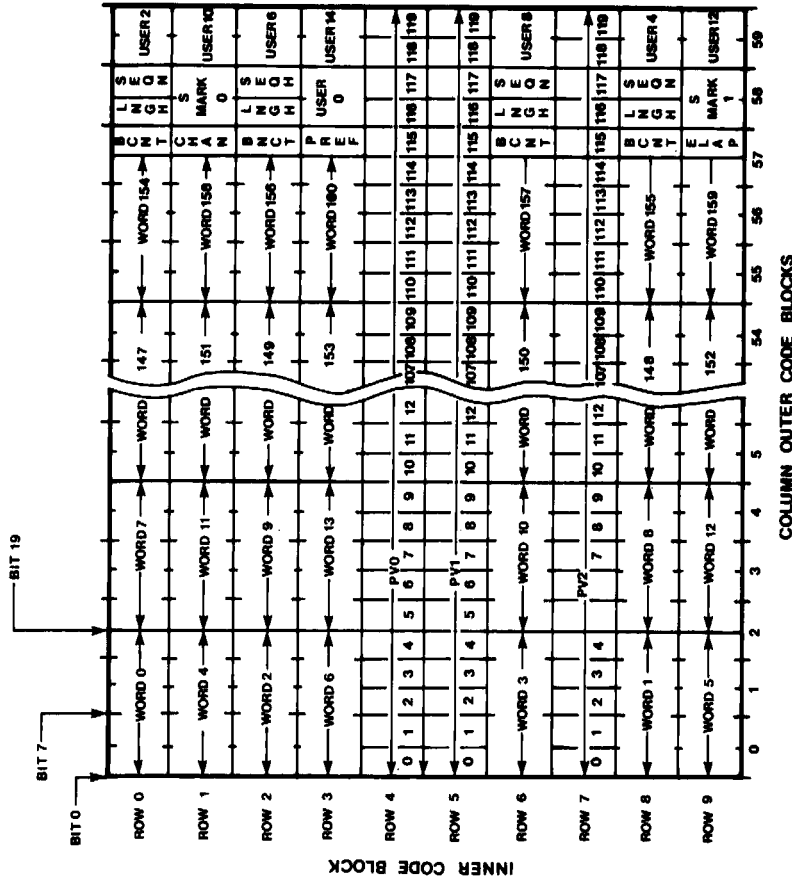


Fig. 14
Audio Data Block Layout
(Even Block Shown - Odd is Similar)

Notes:

1. Words 159, 160 may not be data filled in all blocks.
2. Words 0, 1, 2, 3, etc., refer to a sequence of even audio data words in an even audio product block, and correspond to the odd audio data words in an odd audio product block.

5.3.3.5 When audio data is synchronous with a 29.97 Hz video frame frequency, the sequence of blocks shall be in accordance with Table 15.

Table 15
525/60 Audio Frame Block Sequence

FRAME NO	SEGMENT NO	AUDIO SAMPLE COUNT	
		EVEN BLOCK	ODD BLOCK
0	00	160	160
	01	161	160
	02	160	160
	03	161	160
1	04	160	160
	05	160	160
	06	160	160
	07	161	160
2	08	160	160
	09	160	160
	0A	160	160
	0B	161	160
3	0C	160	160
	0D	161	160
	0E	160	160
	0F	160	160
4	10	160	160
	11	161	160
	12	160	160
	13	160	160
4	14	160	160
	15	161	160
	16	160	160
	17	161	160
	18	160	160

The start of audio frame 0 is related to the control track reference pulse described in 6.7.

5.4 Interface Control Words. Interface control words (ICW) are generated at the input interface from incoming data or user selection and serve to signal this information to the output interface. ICWs have a length of four or eight bits.

5.4.1 Channel Use (CHAN) — Four Bits. CHAN specifies the usage of the two input channels in an interface data stream. CHAN is derived from channel status byte 1. (See Fig. 15 and Table 16.)

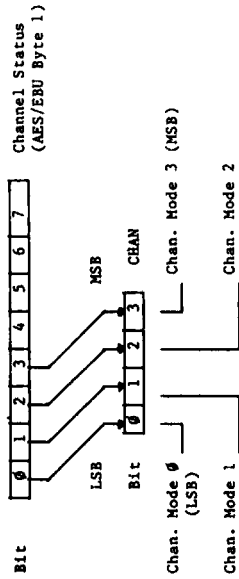


Fig. 15
Audio Input Channel Status

Table 16
Audio Input Channel Status

Mode	0	1	2	3	Value
0	0	0	0	0	2 channel — default
1	0	0	0	1	2 channel
2	0	0	1	0	Single channel
3	0	0	1	1	Prim/sec 2 channel
4	0	1	0	0	Stereophonic
5	0	1	0	1	Undefined
Through	1	1	1	1	1

CHAN is inserted in bits 4-7 of byte (1.57) of both audio product blocks.

5.4.2 Pre-emphasis (PREF) — 4 Bits. PREF specifies the usage of pre-emphasis in the audio coding. PREF is derived from channel status byte 0. (See Fig. 16 and Table 17.)

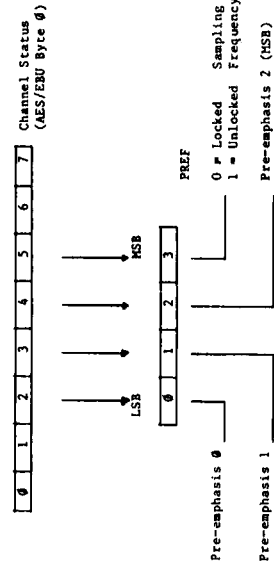


Fig. 16
Audio Input Pre-emphasis Status

Table 17
Audio Input Pre-emphasis Status

Mode	PREF BIT		Value
	0	1	
0	0	0	Pre-emphasis off — (default)
1	0	0	Reserved
2	0	1	Reserved
3	0	1	Reserved
4	1	0	Pre-emphasis off
5	1	0	Reserved
6	1	1	50/15 microsec (CD type)
7	1	1	CCITT J17-6.5 dB at 800 Hz

PREF is inserted in bits 4-7 of byte (3,57) of both audio product blocks.

5.4.3 Audio Data Word Mode (LNGB) — 4 Bits. LNGB specifies the audio word length and the usage of the ancillary bits Status, User, and Validity. LNGB is derived from user control inputs. (See Fig. 17 and Table 18.)

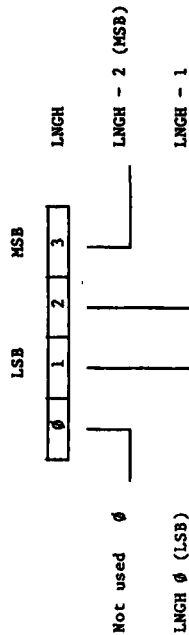


Fig. 17

Audio Data Word Length

Table 18
Audio Data Word Length

Mode	Bits				Audio Length	Ancillary Bits			
	3	2	1	0		C	U	V	R
0	0	0	0	0	16 bits	X	X	X	X
1	0	0	1	1	17 bits	X	X	X	—
2	0	1	0	0	18 bits	X	—	X	—
3	0	1	1	1	18 bits	X	X	—	—
4	1	0	0	0	19 bits	X	—	—	—
5	1	0	1	1	19 bits	—	—	X	—
6	1	1	0	0	19 bits	—	X	—	—
7	1	1	1	1	20 bits	—	—	—	—

LNGB is inserted in bits 0-3 in column 58, rows 0, 2, 6, 8.

5.4.4 Block Sync Location S MARK 0, S MARK 1 — 8 Bits. Specifies the location of the first and last block sync associated with channel status and user data as defined in Section 6.0 of ANSI S4.40-1985. S MARK 0 contains the word count, in the current block, of the first block sync detected, i.e., the word address in the ODD or EVEN block pointing to the first sample after the block sync mark. S MARK 1 identifies the last block sync detected. Where multiple marks are encountered, only the last one will be stored. (See Fig. 18.)




Fig. 18


Audio Block Sync

S MARK = AA₈ if no mark is found within the defined range.

S MARK 0 is inserted in byte 1,58 of each block, with the default value AA₈ placed in corresponding location in the block (ODD or EVEN) not containing the mark. S MARK 1 is inserted similarly in byte (9,58).

5.5 Processing Control Words. Processing control words (PCW) are employed to pass control information from the record processor to the playback processor. They consist of 4-bit or 8-bit words.

5.5.1 Word Count (B CNT) — 4 Bits. B CNT specifies the number of useful data words in the current block, a number lying between 159 and 161 words (397.5 to 402.5 bytes). (See Fig. 19.)

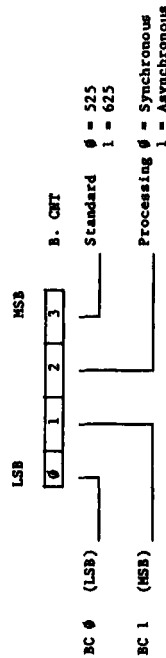

Data Length Words	BH
159	0 1
160	0 0
161	1 0
Illegal	1 1

Fig. 19

Audio Word Block Count

B CNT is inserted in bits 4-7 of bytes (0,57), (2,57), (6,57), (8,57) of the associated block.

5.5.2 Overlap Edit (E LAP) — 4 Bits. E LAP specifies the segment associated with an overlap edit transition, during which time the new (downstream) audio data replaces the old (upstream) audio data only in the duplicate audio sector rows 2 and 3.

LSB	MSB	UCW	BLOCK	BYTE	
0	1	2	3	E LAP	
E LAP = F _n for an overlap segment					
E LAP = 0 _n otherwise					
E LAP is inserted in bits 4-7 of byte (9,57) of both blocks.					
5.5.3 Sequence (SEQN) — 4 Bits. SEQN specifies a sequence of 15 blocks (each of 4 fields) to aid processing in high-speed data recovery.					
LSB	MSB	1	2	3	SEQN

SEQN advances in binary count, modulo 15 from an arbitrary origin; is inserted in bits 4-7 of column 58 in rows 0, 2, 6, 8, and may be discontinuous after editing operations.

5.6 User Control Words (UCW). User control words serve to pass user information from the

5.7 Outer Error Protection. Rows 4, 5, 7 of the blocks contain the error protection data associated with each column.

- Type — Reed-Solomon
- Galois Field — GF(16)
- Field Generator Polynomial — $x^4 + x^1 + x^0$ (x^i are place keeping variables in GF(2), the binary field.)
- Order of Use — Left-most term is the most significant "oldest" in time computationally, and first written to tape.
- Code Generator Polynomial (in GF(16)) — $G(x) = (x + \alpha^9)(x + \alpha^1)(x + \alpha^2)$ is given by 02₁₆ in GF(16).
- Check Characters — $K_2x^2 + K_1x^1 + K_0x^0$, the remainder after dividing the polynomial $x^4D(x)$ by $G(x)$, where $D(x)$ is the polynomial given by $D(x) = B_6x^6 + B_5x^5 + \dots + B_1x^1 + B_0x^0$
- Equation of Full Code — $B_6x^6 + B_5x^5 + \dots + B_0x^0 + K_2x^2 + K_1x^1 + K_0x^0$

Outer-code check characters in each column of the 60 x 10 blocks are calculated using the data order existing prior to the re-arrangement into the pattern shown in Fig. 14, i.e., in ascending sample order.

The check characters K_2 through K_0 are used as the vertical protection characters PV_2 through PV_0 , respectively, and inserted in their associated column at rows 4, 5, 7. Table 20 shows an example of three possible patterns, where pattern 1 is the impulse function, where the values in the check locations represent the expansion of the code generator polynomial.

Table 20
Outer Error Protection Patterns

Symbol Position	0	1	2	3	4	5	6	7	8	9
Pattern 1	0	0	0	0	0	0	0	1	7	E
Pattern 2	0	1	2	3	4	5	6	8	0	C
Pattern 3	C	C	C	C	C	C	C	C	6	9
Symbol Identity	B_6	B_5	B_4	B_3	B_2	B_1	B_0	K_2	K_1	K_0

5.8 Inner Protection and Channel Coding. Generation of the inner code check characters PH_0 through PH_3 is fully described in Section 3 of this standard. This coding is common with the video processor.

6.2 During time interval A of the record, the polarity of the tracking-control flux shall be such that the south pole of the magnetic domain points in the direction of normal tape travel and, similarly, during time interval B, the north pole shall be similarly oriented.

5.9 Order of Transmission to Inner Coding. The block of data shown in Fig. 15 is passed sequentially to the inner coding process as follows:
Row 0 — col 0 to 59
Row 1 — col 0 to 59

6.3 The peak-to-peak recorded flux shall be 185 ± 20 nWb/m of track width. The residual peak flux level from any previous recording shall be more than 30 dB below the peak level of the specified recording.

6.4 The recorded pulse doublets shall each have a half-width T, where T is 1/64 times the period of four helical tracks. The record current rise and fall times shall be less than 15 microseconds (10-90 percent), and be matched within 5 microseconds.

6.5 Servo reference pulse doublets shall be separated by a pitch distance equivalent to four helical tracks (150 Hz nominal frequency). They are aligned with the end of the preamble for video section 0, as shown in SMPTE 224M.

6.6 A second pulse doublet shall indicate the first segment of the video frame. It shall be located a distance 4T after the servo reference pulse doublet. (The video frame begins when $F = 0$ in the End of Active Video [EAV] timing reference signal, as shown in CCIR Report AG/11, that occurs in segment 0 of field 0).

5.10 Sector Usage. Audio data from each of the four recording channels is placed on tape as shown in Fig. 20. Each data block (ODD & EVEN) from a channel (1, 2, 3, 4) is recorded twice. During the overlap period of an edit, the new data is recorded only in audio sector rows 2 and 3 and the existing data is retained in audio sector rows 0 and 1.

6. Tracking Control Record

6.1 The tracking control record shall be a series of pulse doublets recorded on the track as shown in Fig. 21. The location of the tracking control record and its positioning relative to video information is defined in SMPTE 224M.

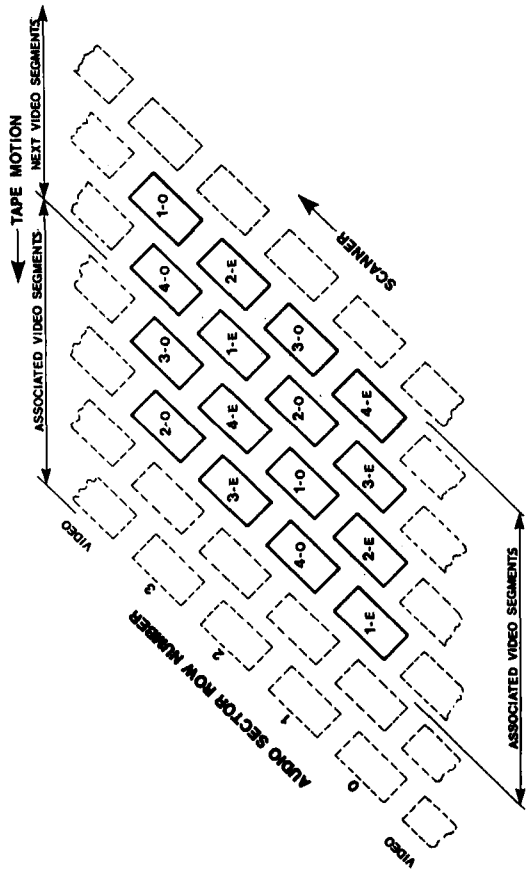


Fig. 20

Audio Sector Arrangement

Note: 1, 2, 3, 4, indicate channel numbers.
 0 = ODD samples.
 E = EVEN samples.

- 6.7 A third pulse doublet shall, when present, indicate the start of an audio frame sequence. It shall be located at a distance 12T after the servo reference pulse doublet.
- 6.8 A fourth pulse doublet shall indicate the start of a field sequence. It shall be located at a distance 12T after the servo reference pulse doublet.
- 6.9 Any edit shall take place in the unmag-netized space between pulse groups.

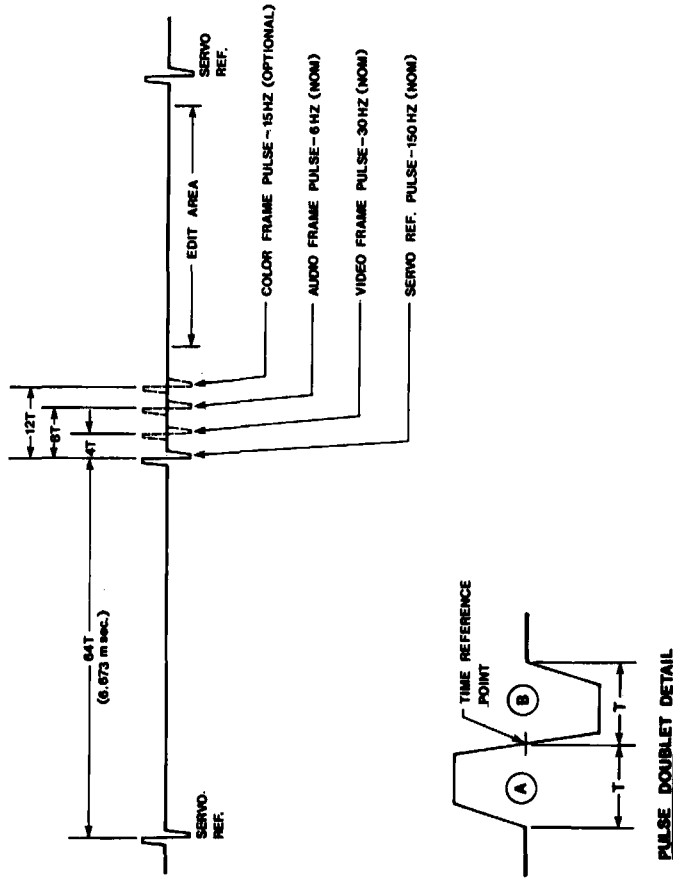


Fig. 21

Recorded Control Record Waveform Timing

- Notes:
- 1. T is $\frac{1}{6}$ the period of 4 helical tracks.
 $T = 104.2 \mu\text{sec.}$
 - 2. Rise/fall time of mark is $< 15 \mu\text{sec.}$

Proposed American National Standard
for component digital video recording —
19-mm type D-1 cassette —
cue and time and control code records

SMPTE 228M

1. Scope

This standard specifies the content, format, and modulation method of the longitudinal records contained in the cue (reference audio) track and the time-code track in 19-mm type D-1 helical-scan cassette video recorders. Track dimensions and locations are specified in SMPTE 224M. The document applies to recorders operating in the 525-line television system with a frame frequency of 29.97 Hz.

2. Referenced Documents

This standard is intended for use in conjunction with the following documents:

- SMPTE 224M, Component Digital Video Recording — 19-mm Type D-1 Cassette — Tape Record
- SMPTE 225M, Component Digital Video Recording — 19-mm Type D-1 Cassette — Magnetic Tape
- SMPTE 226M, Component Digital Video Recording — 19-mm Type D-1 Cassette — Tape Cassette
- SMPTE 227M, Component Digital Video Recording — 19-mm Type D-1 Cassette — Helical Data and Control Records
- ANSI V98.12M-1981, Time and Control Code for Video and Audio Tape for 525-Line/60-Field Television Systems
- IEC Recommendation 461, Time and Control Code for Video Tape Recordings
- SMPTE EG 10, Tape Transport Geometry Parameters for 19-mm Type D-1 Cassette for Component Digital Video Recording

Page 1 of 4 pages

SMPTE EG 11, Nomenclature for 19-mm Type D-1 Cassette for Component Digital Video Recording

3. General Specifications

- 3.1 Dimensions are in the metric system.
- 3.2 Tests and measurements made on the tape record to check the requirements of this standard shall be made under the following conditions unless otherwise stated:

Temperature	20°C ± 1°C
Relative humidity	50% ± 2%
Barometric pressure	96 kPa ± 10 kPa
Tape tension	0.8 N ± 0.05 N

- 3.3 Conditioning of the tape stock before recording and testing shall be as follows:

Storage conditioning	Not less than 24 hours
Environmental	Stabilized to the conditions specified in 3.2
Tape tension	Wound on a reel at a tension of 0.6 to 1.5 N.

- 3.4 The reference edge of the tape for dimensions specified in this standard shall be the lower edge as shown in Fig. 1. The magnetic coating, with the direction of tape travel as shown in Fig. 1, is on the side facing the observer.

- 3.4.1 For the purposes of measurement of dimensions specified in the figures, the measurement point on the reference edge is defined as a point located on a straight line connecting two points on the edge of the tape 230 mm apart. The measurement point shall be equidistant between the two points.

Page 2 of 4 pages

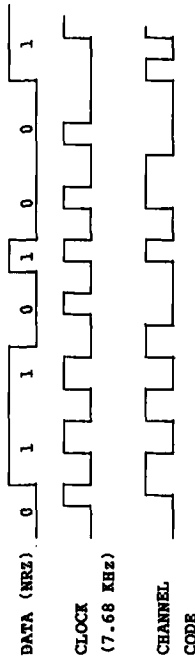


Fig. 1
Bi-phase Mark Coding

4. Tape Speed

The tape speed shall be 286.588 mm/s ± 0.2%.

5. Cue Record

5.1 Method of Recording. The signals shall be recorded using the anhysteresis (AC bias) method.

5.2 Flux Level. The recorded reference audio level shall correspond to an RMS magnetic short-circuit flux level of 50 ± 5 nWb/m of track width at 1000 Hz.

5.3 Recorded Flux Characteristics. When a tape record is recorded from a constant voltage level applied to the input terminals of the recording system, the short circuit tape flux level on the record versus frequency, $L_0(f)$, shall be as given by the following equation:

$$L_0(f) = 10 \log_{10} \frac{1}{1 + (f/f_0)^2} \text{ [dB]}$$

where L_0 is the relative tape flux level; f is the frequency at which the response is being computed; and F_0 is the high-frequency transition fre-

- quency, 10.6 kHz. (This corresponds to a time constant of 15 μsec.)
- 5.4 Relative Timing. Cue information shall be recorded on the tape at a point referenced to the associated video information as defined by dimension P of SMPTE 224M.

6. Time and Control Code Record

- 6.1 Method of Recording. The signals shall be recorded using the anhysteresis (AC bias) recording method.
- 6.2 Flux Level. The recorded peak-to-peak flux shall correspond to a magnetic short circuit flux level of 185 ± 20 nWb/m of track width.
- 6.3 Channel Code. Data shall employ bi-phase mark coding (see Fig. 1) with a carrier frequency of 256 times the television frame frequency, 7.680 kHz nominal. (This results in a longitudinal packing density of 27.0 b/mm or 686 b/in.)
- 6.4 Data Format. The data format shall be as specified in Fig. 2. The content of the time code and user bit sub-field shall be as specified in Fig. 3.

SMPTE 228M

THIS PROPOSAL IS PUBLISHED FOR COMMENT ONLY

