

## Cinematography — Recording head gaps for two sound records on 17,5 mm magnetic film — Positions and width dimensions

### 1 Scope

This International Standard specifies the lateral positions and width dimensions of the recording heads for two magnetic sound records and a control track on 17,5 mm single perforated magnetic recording film.

It also specifies the reproducing velocity of the film travel.

### 2 Normative reference

The following standard contains provisions which, through reference in this text, constitute provisions of this International Standard. At the time of publication, the edition indicated was valid. All standards are subject to revision, and parties to agreements based on this International Standard are encouraged to investigate the possibility of applying the most recent edition of the standard listed below. Members of IEC and ISO maintain registers of currently valid International Standards.

ISO 1189 : 1988, *Cinematography — Recorded characteristic for magnetic sound records on 35 mm motion-picture film excluding striped release prints — Specifications.*

### 3 Location and width of magnetic head gaps

3.1 The width dimensions and lateral positions of the magnetic head gaps shall be as shown on figures 1 and given in table 1.

3.2 The magnetic head gaps shall be physically in line at an angle of  $90^\circ \pm 3'$  to the direction of the film travel.

### 4 Recorded characteristic

The recorded characteristic shall be in accordance with ISO 1189.

### 5 Velocity

5.1 The sound records are intended for use at velocities of 24 frames (approximately 45,6 cm or 18 in) per second, or at 25 frames (approximately 47,5 cm or 18,7 in) per second.

5.2 The tolerances given in ISO 1189 permit a choice of operating conditions such that the recorded characteristic conforms to ISO 1189 even though the recording is intended for either 24 or 25 frames per second, and the reproduction is conducted at the other velocity.

### 6 Track usage

6.1 The two tracks specified in this International Standard may be used for either related or unrelated material.

6.2 When used for two-channel stereophonic programme material, track 1 shall be used for the left (as viewed from the auditorium) loudspeaker channel. Track 2 shall be used for the right (as viewed from the auditorium) loudspeaker channel.

6.3 The control track shall be used for recording other information and for address systems in analogue or digital form.

NOTE — It is recommended that the container and leader of material having two sound records be labelled to indicate the nature of each recording and, if applicable, the nature of the information recorded on the control track.

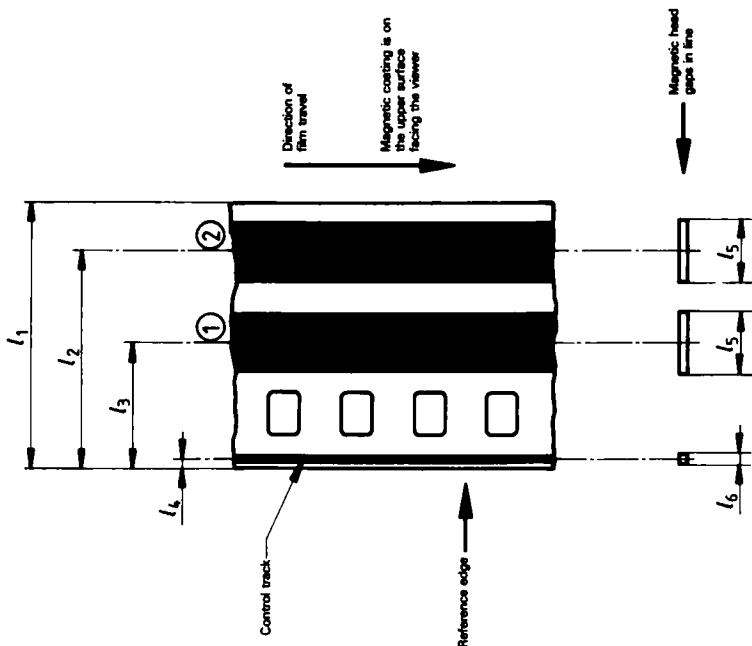


Figure 1 — Audio records on 17,5 mm magnetic film

Table 1 — Dimensions

Dimension	mm	in
$l_1$ (ref)	17,49	0,689
$l_2$	$14,05 \pm 0,05$	$0,553 \pm 0,002$
$l_3$	$8,10 \pm 0,05$	$0,319 \pm 0,002$
$l_4$	$0,60 \pm 0,05$	$0,024 \pm 0,002$
$l_5$	4,00	0,157
$l_6$	-0,1	0
	0,70	0,028
	-0,1	-0,004

UDC 778.634.465

Descriptions : cinematography, motion-picture film, sound recording, sound reproduction, magnetic recording, magnetic heads, recording tracks, air gaps, position (location), width, dimensions.

Price based on 2 pages